


# 200A Meter Mounting Equipment

Commercial/Industrial<sup>①②③</sup>, Type HQ, 7 terminal for polyphase, 3 or 4 wire, Wye or Delta


Cont. amp rating	Service	Connectors <sup>④</sup>	Dimensions (in.)			Hub opening	Encl. material	Catalog number
			W	H	D			
FMG approved for: FP&L, Progress Energy, TECO and Gulf Power Also approved for JEA, Bartow Elec., Gainesville Elec. and Tallahassee Elec.								
200	OH	#6-250 kcmil	10.0	17.0	5.2	RX Opening	Steel	40007-01F
200	OH	#6-250 kcmil	10.0	17.0	5.2	RX Opening	Aluminum	41007-01F
200	OH/UG	#6-250 kcmil	13.0	19.0	5.2	RX Cl. Plate	Steel	40407-025F
200	OH/UG	#6-250 kcmil	13.0	19.0	5.2	RX Cl. Plate	Aluminum	41407-025F
Not FMG approved Approved for Gainesville Elec. and Tallahassee Elec.								
200	OH/UG	#6-350 kcmil	13.0	19.0	5.2	RX Opening	Steel	40407-015F

- ① All units are supplied with a ground lug.
- ② Bypass mechanism is lever-operated, jaw-pressure release with 100% bypass capacity.
- ③ Disconnect sleeves should not be used with these devices.
- ④ HQ and HQU have 350 kcmil lugs - wire size limited to 250 kcmil per FMG.  
See accessories page in back.

Knockouts (inches):	
●:	1/4
A:	1/2
B:	1/2, 3/4
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
AF:	1, 1-1/2, 2, 2-1/2, 3
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
Al:	1, 1-1/4, 1-1/2, 2, 2-1/2, 3
RX:	∅2.750 HUB OP

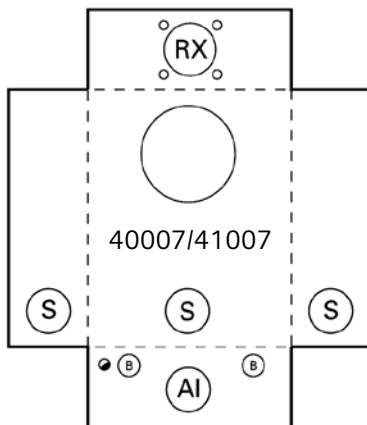

40007-01F

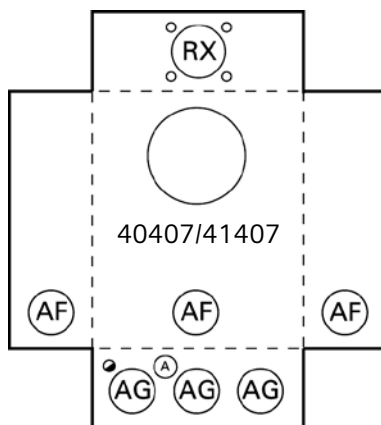

40407-025