

Product datasheet

Specifications



discrete output module Modicon Quantum - 12 O - 24..125 V DC

140DDO88500

⚠ Discontinued on: 31 Dec 2022

⚠ To be end-of-service on: 31 Dec 2030

⚠ To be discontinued

Main

Range of product	Modicon Quantum automation platform
Product or component type	Dc discrete output module
Discrete output number	12

Complementary

Group of channels	2 groups of 6
Discrete output logic	Negative logic (sink)
Addressing requirement	1 input word 1 output word
Discrete output voltage	24...125 V DC
Output voltage limits	19.2...156.2 V
Maximum load current	<= 3 A at 0...60 °C each group <= 6 A at 0...60 °C per module <= 0.75 A at 0...40 °C each point
Surge current	4 A for 1 ms
Response time	1 ms at state 0 to state 1 1 ms at state 1 to state 0
Short-circuit protection	With
Output overvoltage protection	By varistor per group
Load inductance	No limit (protected by diode)
Maximum tungsten load	41 W 115 V 46 W 130 V 8 W 24 V
Switching frequency	<= 50 Hz
Fault indication	Overcurrent
Isolation between channels and bus	2500 Vrms DC for 1 minute
Isolation between group	1200 Vrms DC for 1 minute
Protection type	Internal output protection by 4 A fuse
Power dissipation	1 W + (0.77 x all points on)
Marking	CE
Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault detected (F) 16 LEDs (green) for input status
Bus current requirement	375 mA 6 outputs at state 1 650 mA 12 outputs at state 1

Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Module format	Standard
Net weight	0.45 kg

Environment

Product certifications	GOST FM Class 1 Division 2 C-Tick RMRS
Standards	UL 508 CSA C22.2 No 142
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.3 cm
Package 1 Width	4.5 cm
Package 1 Length	31.2 cm
Package 1 Weight	515.0 g

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
EU RoHS Directive	Compliant


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Racks for Modules Mounting


Dimensions of Modules and Racks

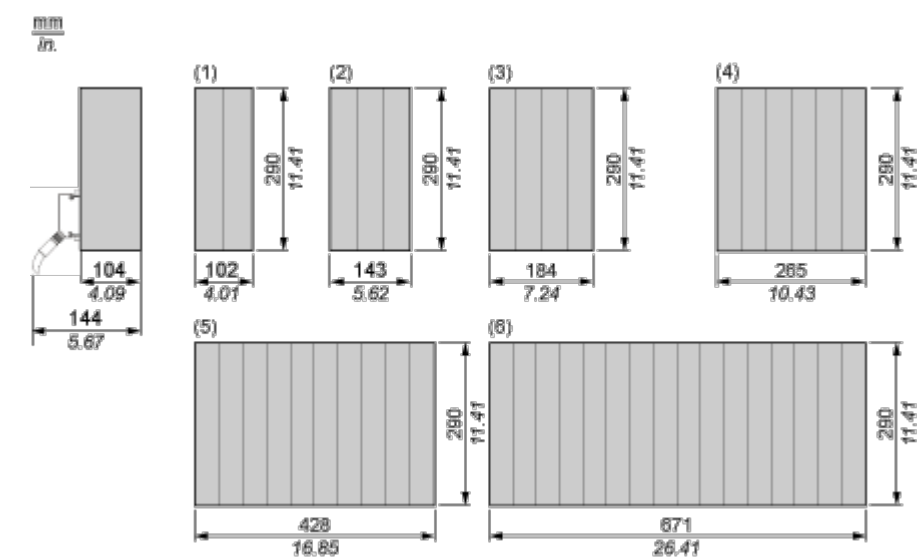

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

24...125 Vdc Discrete Output Source Module

Wiring Diagram

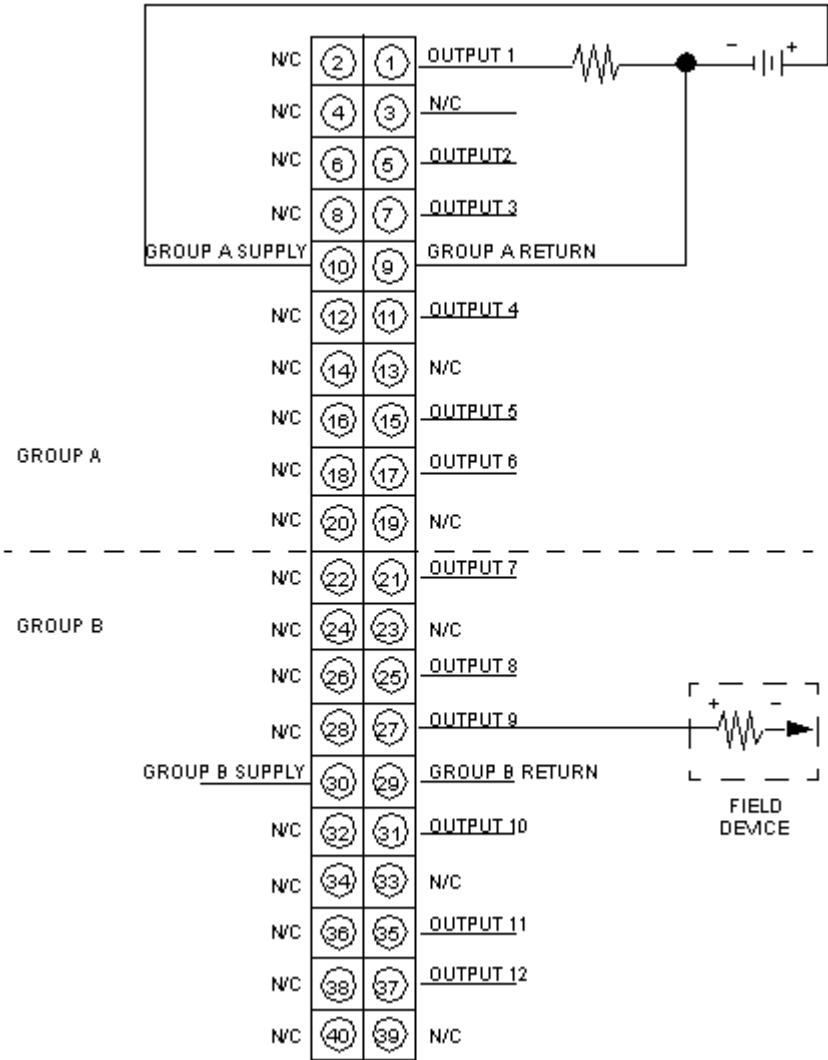

N/C Not Connected