

Electrical Auxiliaries

The Multi 9 product line includes a variety of electrical auxiliaries for the C60, C120, and NC120 supplementary protectors and circuit breakers. They may be attached to the protective device as needed to fulfill the tripping or monitoring application requirements. They include the following devices.

- MN Undervoltage Release
- MX + OF Shunt Trip and Auxiliary Switch
- OF Auxiliary Switch
- SD Alarm Switch
- TM Motor Operator
- OFS Special Auxiliary Switch (For use with GFP and ID RCCB's, allows other accessories to be mounted to the side of the GFP.)

The Multi 9 Vigi Module, which adds ground-fault protection, is described in Section 4.

Accessories have a maximum width of 54 mm and are mechanically linked to the base C60 or C120 protective devices.

Figure 14: Possible Auxiliary Combinations

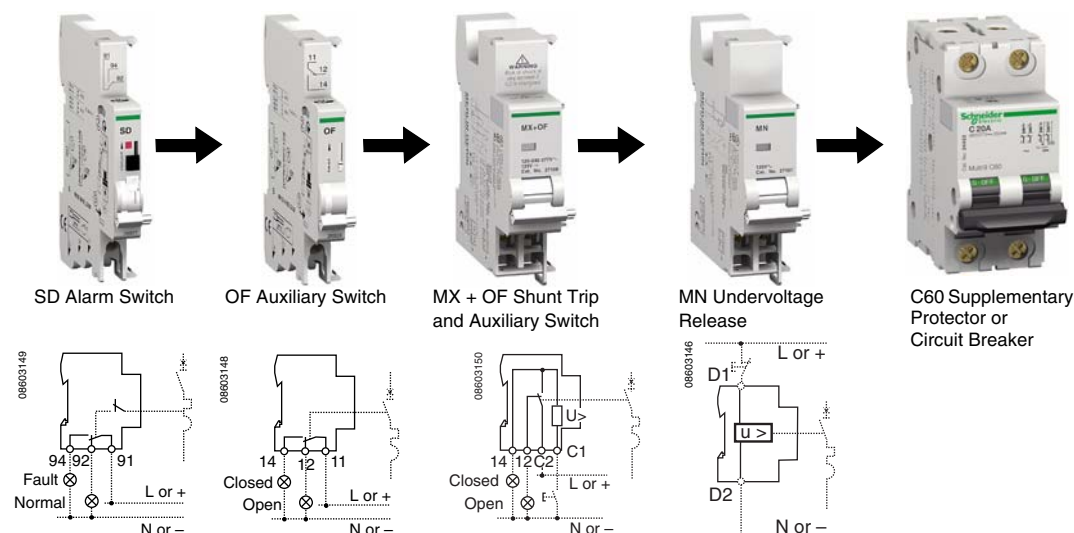


Table 40: Catalog Numbers for Electrical Auxiliary Devices

Device	Control Voltage		Modules (9mm)	C60 / C120 / GFP		
	Vac	Vdc		UL/IEC	IEC	IEC
MX + OF Shunt Trip + Aux Switch	24	24	2	27118	27118	27118
	48	48	2	27110	27110	27110
	110-240-277	125	2	27109	27109	27109
	220-277	—	—	—	—	—
MN Undervoltage Release	24	24	2	27108	27108	27108
	48	48	2	27106	27106	27106
	120	—	2	27107	27107	27107
	240	—	2	27105	27105	27105
OF Auxiliary Switch	12-277	12-125	1	MG26925	26924	26924
SD Alarm Switch	12-277	12-125	1	MG26928	26927	26927
OFS Alarm Switch for GFP Only	240/415	130	1	—	—	26923