

Product data sheet

Specifications



Combination kit between breaker and contactor, TeSys GV5 / GV7, for contactor LC1F225-265

GV7AC07

⚠ Discontinued on: Oct 8, 2021

⚠ Discontinued

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range	TeSys
Product or Component Type	Kit for combination with connector
Device short name	GV7AC
Range compatibility	TeSys TeSys GV5 motor circuit breaker TeSys TeSys GV7 motor circuit breaker TeSys TeSys F contactor
Accessory / separate part category	Connection accessory
Product Compatibility	LC1F225 LC1F265

Complementary

Kit composition	Terminal screw type connector Short terminal shield Adjustable mounting bracket(s)
Quantity per Set	Set of 1
Net Weight	1.21 lb(US) (0.55 kg)

Ordering and shipping details

Category	US10I1122366
Discount Schedule	0I11
GTIN	3389110643114
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.6 in (9.2 cm)
Package 1 Width	7.4 in (18.7 cm)
Package 1 Length	3.9 in (10 cm)
Package weight(Lbs)	2.524 lb(US) (1.145 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Better

Materials and Substances	
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


Lifetime extension	
Repair	No

Combination of GV7R and TeSys Contactor LC1 F with Kit GV7AC0.

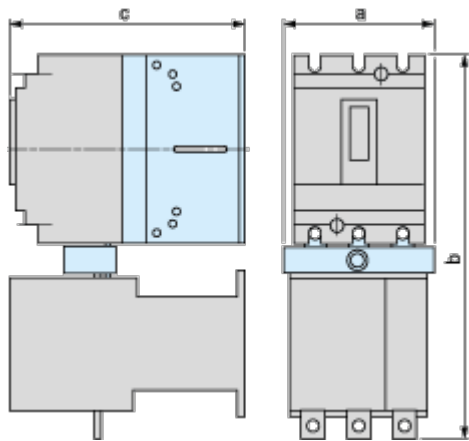

	a	b	c
GV7R + LC1F115 or F150 + GV7AC06	119	334	181
GV7R + LC1F185 + GV7AC06	119	338	188
GV7R + LC1F225 + GV7AC07	131	358	188
GV7R + LC1F265 + GV7AC07	131	364	215

Combination of GV7R and TeSys Contactor LC1F with Kit GV7 AC0.

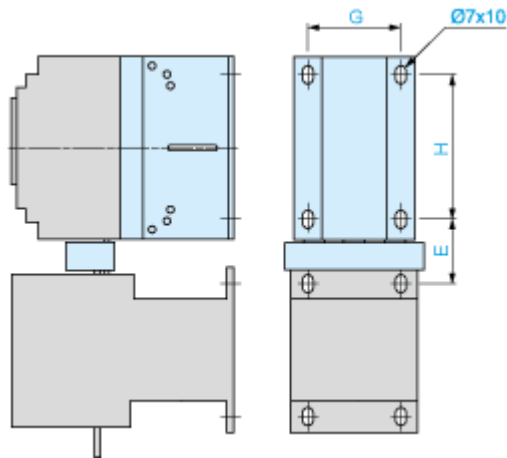

	E	G	H
GV7R + LC1F115 + GV7AC06	44	85	120
GV7R + LC1F150 + GV7AC06	46	85	120
GV7R + LC1F185 + GV7AC06	48	85	120
GV7R + LC1F225 + GV7AC07	57	85	120

	E	G	H
GV7R + LC1F265 + GV7AC07	60	85	120