


# Product datasheet

Specifications

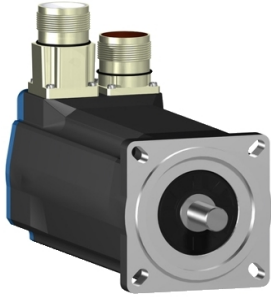

## AC servo motor BSH - 0.7 N.m - 8000 rpm - untapped shaft - without brake - IP50

BSH0701T01A1A

### Main

<b>Device short name</b>	BSH
<b>Product or component type</b>	Servo motor
<b>Maximum mechanical speed</b>	8000 rpm
<b>Continuous stall torque</b>	<p>1.3 N.m for LXM32.U90M2 at 3 A, 230 V, single phase</p> <p>1.4 N.m for LXM05AD10M3X, 200...240 V, three phase</p> <p>1.4 N.m for LXM05BD10M3X, 200...240 V, three phase</p> <p>1.4 N.m for LXM05CD10M3X at 6 A, 200...240 V, three phase</p> <p>1.4 N.m for LXM15LD13M3, 230 V, single phase</p> <p>1.4 N.m for LXM05AD10F1, 110...120 V, single phase</p> <p>1.4 N.m for LXM05AD17M2, 200...240 V, single phase</p> <p>1.4 N.m for LXM05BD10F1, 110...120 V, single phase</p> <p>1.4 N.m for LXM05BD17M2, 200...240 V, single phase</p> <p>1.4 N.m for LXM05CD10F1, 110...120 V, single phase</p> <p>1.4 N.m for LXM05CD17M2, 200...240 V, single phase</p> <p>1.4 N.m for LXM32.D18M2 at 6 A, 115 V, single phase</p> <p>0.7 N.m for LXM15LU60N4, 400 V, three phase</p> <p>0.7 N.m for LXM15LU60N4, 480 V, three phase</p> <p>0.91 N.m for LXM15LU60N4, 230 V, three phase</p> <p>1.4 N.m for LXM15LD10N4, 230 V, three phase</p> <p>1.4 N.m for LXM15LD10N4, 400 V, three phase</p> <p>1.4 N.m for LXM15LD10N4, 480 V, three phase</p> <p>1.4 N.m for LXM15LD13M3, 230 V, three phase</p> <p>1.4 N.m for LXM15LD21M3, 230 V, three phase</p> <p>1.4 N.m for LXM05AD17M3X, 200...240 V, three phase</p> <p>1.4 N.m for LXM05BD17M3X, 200...240 V, three phase</p> <p>1.4 N.m for LXM05CD17M3X, 200...240 V, three phase</p>
<b>Peak stall torque</b>	<p>3.5 N.m for LXM32.U90M2 at 3 A, 230 V, single phase</p> <p>3.19 N.m for LXM15LD13M3, 230 V, single phase</p> <p>2.42 N.m for LXM05AD10F1, 110...120 V, single phase</p> <p>3.19 N.m for LXM05AD17M2, 200...240 V, single phase</p> <p>2.42 N.m for LXM05BD10F1, 110...120 V, single phase</p> <p>3.19 N.m for LXM05BD17M2, 200...240 V, single phase</p> <p>2.42 N.m for LXM05CD10F1, 110...120 V, single phase</p> <p>3.19 N.m for LXM05CD17M2, 200...240 V, single phase</p> <p>3.5 N.m for LXM32.D18M2 at 6 A, 115 V, single phase</p> <p>1.9 N.m for LXM15LU60N4, 400 V, three phase</p> <p>1.9 N.m for LXM15LU60N4, 480 V, three phase</p> <p>1.9 N.m for LXM15LU60N4, 230 V, three phase</p> <p>2.91 N.m for LXM15LD10N4, 230 V, three phase</p> <p>2.91 N.m for LXM15LD10N4, 400 V, three phase</p> <p>2.91 N.m for LXM15LD10N4, 480 V, three phase</p> <p>3.19 N.m for LXM15LD13M3, 230 V, three phase</p> <p>3.19 N.m for LXM15LD21M3, 230 V, three phase</p> <p>2.42 N.m for LXM05AD10M3X, 200...240 V, three phase</p> <p>3.19 N.m for LXM05AD17M3X, 200...240 V, three phase</p> <p>2.42 N.m for LXM05BD10M3X, 200...240 V, three phase</p> <p>3.19 N.m for LXM05BD17M3X, 200...240 V, three phase</p> <p>2.42 N.m for LXM05CD10M3X, 200...240 V, three phase</p> <p>3.19 N.m for LXM05CD17M3X at 6 A, 200...240 V, three phase</p>

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

---

<b>Nominal output power</b>	<p>500 W for LXM32.U90M2 at 3 A, 230 V, single phase  350 W for LXM32.D18M2 at 6 A, 115 V, single phase  400 W for LXM05AD10M3X, 200...240 V, three phase  400 W for LXM05BD10M3X, 200...240 V, three phase  400 W for LXM05CD10M3X, 200...240 V, three phase  380 W for LXM05AD10F1, 110...120 V, single phase  380 W for LXM05BD10F1, 110...120 V, single phase  380 W for LXM05CD10F1, 110...120 V, single phase  400 W for LXM05AD17M2, 200...240 V, single phase  400 W for LXM05BD17M2, 200...240 V, single phase  400 W for LXM05CD17M2, 200...240 V, single phase  654 W for LXM15LD13M3 at 6 A, 230 V, single phase  1000 W for LXM15LD10N4, 400 V, three phase  1000 W for LXM15LD10N4, 480 V, three phase  400 W for LXM05AD17M3X, 200...240 V, three phase  400 W for LXM05BD17M3X, 200...240 V, three phase  400 W for LXM05CD17M3X, 200...240 V, three phase  440 W for LXM15LU60N4, 230 V, three phase  564 W for LXM15LD10N4, 230 V, three phase  586 W for LXM15LU60N4, 400 V, three phase  586 W for LXM15LU60N4, 480 V, three phase  654 W for LXM15LD13M3, 230 V, three phase  654 W for LXM15LD21M3, 230 V, three phase</p>
-----------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

---

<b>Nominal torque</b>	<p>0.94 N.m for LXM32.U90M2 at 3 A, 230 V, single phase  1.25 N.m for LXM15LD13M3, 230 V, single phase  1.36 N.m for LXM32.D18M2 at 6 A, 115 V, single phase  0.7 N.m for LXM15LU60N4, 230 V, three phase  0.7 N.m for LXM15LU60N4 at 6 A, 400 V, three phase  0.7 N.m for LXM15LU60N4, 480 V, three phase  1.23 N.m for LXM15LD10N4, 400 V, three phase  1.23 N.m for LXM15LD10N4, 480 V, three phase  1.25 N.m for LXM15LD10N4, 230 V, three phase  1.25 N.m for LXM15LD13M3, 230 V, three phase  1.25 N.m for LXM15LD21M3, 230 V, three phase</p>
-----------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

---

<b>Nominal speed</b>	<p>5000 rpm for LXM32.U90M2 at 3 A, 230 V, single phase  3000 rpm for LXM05AD10F1, 110...120 V, single phase  3000 rpm for LXM05BD10F1, 110...120 V, single phase  3000 rpm for LXM05CD10F1, 110...120 V, single phase  3000 rpm for LXM05AD10M3X, 200...240 V, three phase  3000 rpm for LXM05BD10M3X, 200...240 V, three phase  3000 rpm for LXM05CD10M3X, 200...240 V, three phase  8000 rpm for LXM15LD10N4 at 6 A, 400 V, three phase  3000 rpm for LXM05AD17M2, 200...240 V, single phase  3000 rpm for LXM05BD17M2, 200...240 V, single phase  3000 rpm for LXM05CD17M2, 200...240 V, single phase  3000 rpm for LXM05AD17M3X, 200...240 V, three phase  3000 rpm for LXM05BD17M3X, 200...240 V, three phase  3000 rpm for LXM05CD17M3X, 200...240 V, three phase  5000 rpm for LXM15LD13M3, 230 V, single phase  2500 rpm for LXM32.D18M2 at 6 A, 115 V, single phase  5000 rpm for LXM15LD10N4, 230 V, three phase  5000 rpm for LXM15LD13M3, 230 V, three phase  5000 rpm for LXM15LD21M3, 230 V, three phase  6000 rpm for LXM15LU60N4, 230 V, three phase  8000 rpm for LXM15LD10N4, 480 V, three phase  8000 rpm for LXM15LU60N4, 400 V, three phase  8000 rpm for LXM15LU60N4, 480 V, three phase</p>
----------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>Product compatibility</b>	LXM05AD10F1 at 110...120 V single phase LXM05AD17M2 at 200...240 V single phase LXM05BD10F1 at 110...120 V single phase LXM05BD17M2 at 200...240 V single phase LXM05CD10F1 at 110...120 V single phase LXM05CD17M2 at 200...240 V single phase LXM15LD13M3 at 230 V single phase LXM32.U90M2 at 230 V single phase LXM32.D18M2 at 115 V single phase LXM15LU60N4 at 230 V three phase LXM05AD10M3X at 200...240 V three phase LXM05BD10M3X at 200...240 V three phase LXM05CD10M3X at 200...240 V three phase LXM15LD13M3 at 230 V three phase LXM15LU60N4 at 400 V three phase LXM15LU60N4 at 480 V three phase LXM15LD10N4 at 400 V three phase LXM05AD17M3X at 200...240 V three phase LXM05BD17M3X at 200...240 V three phase LXM05CD17M3X at 200...240 V three phase LXM15LD10N4 at 230 V three phase LXM15LD10N4 at 480 V three phase LXM15LD21M3 at 230 V three phase
<b>Shaft end</b>	Untapped
<b>IP degree of protection</b>	IP50 standard
<b>Speed feedback resolution</b>	131072 points/turn
<b>Holding brake</b>	Without
<b>Mounting support</b>	International standard flange
<b>Electrical connection</b>	Straight connectors

## Complementary

<b>Range compatibility</b>	Lexium 15 Lexium 32 Lexium 05
<b>supply voltage max</b>	480 V
<b>Network number of phases</b>	Three phase
<b>Continuous stall current</b>	3.2 A
<b>maximum continuous power</b>	1.06 W
<b>Maximum current Irms</b>	10 A for LXM32.D18M2 9 A for LXM32.U90M2 9.9 A for LXM15LD13M3 9.9 A for LXM15LD21M3 9.9 A for LXM15LU60N4 9.9 A for LXM15LD10N4
<b>Maximum permanent current</b>	10.1 A
<b>Switching frequency</b>	8 kHz
<b>Second shaft</b>	Without second shaft end
<b>Shaft diameter</b>	11 mm
<b>Shaft length</b>	23 mm
<b>Feedback type</b>	Single turn SinCos Hiperface
<b>Motor flange size</b>	70 mm
<b>Number of motor stacks</b>	1
<b>Torque constant</b>	0.44 N.m/A at 120 °C
<b>Back emf constant</b>	26 V/krpm at 120 °C
<b>Number of motor poles</b>	3.0

Rotor inertia	0.25 kg.cm <sup>2</sup>
Stator resistance	3.3 Ohm at 20 °C
Stator inductance	6.75 mH at 20 °C
Stator electrical time constant	3.73 ms at 20 °C
Maximum radial force Fr	360 N at 6000 rpm 380 N at 5000 rpm 410 N at 4000 rpm 460 N at 3000 rpm 520 N at 2000 rpm 660 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
Type of cooling	Natural convection
Length	154 mm
Centring collar diameter	60 mm
Centring collar depth	2.5 mm
Number of mounting holes	4
Mounting holes diameter	5.5 mm
Circle diameter of the mounting holes	82 mm
Net weight	2.2 kg
Sizing reference	BSH0701T
Network number of phases	3
Accuracy error [angular]	1.4 °
Temperature copper hot	120 °C
Temperature magnet hot	100 °C
Temperature magnet rt	20 °C
Output current 3s peak	10.1 A
Inertia	0.0 kg.cm <sup>2</sup> of brake 0.25 kg.cm <sup>2</sup> of motor

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	12.300 cm
Package 1 Width	12.800 cm
Package 1 Length	37.700 cm
Package 1 Weight	2.100 kg
Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	17.450 kg
Unit Type of Package 3	P06
Number of Units in Package 3	32

---

<b>Package 3 Height</b>	75.000 cm
<b>Package 3 Width</b>	80.000 cm
<b>Package 3 Length</b>	60.000 cm
<b>Package 3 Weight</b>	77.800 kg

---

## **Contractual warranty**

---

<b>Warranty (in months)</b>	18
-----------------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	1 100 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	9 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.3 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	1 090 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.2 kg CO2 eq.

## Use Better



### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	8c11b0c9-e501-4810-83eb-05fc6605ede4
REACH Regulation	<a href="#">REACH Declaration</a>
PVC free	Yes

## Use Longer



### Lifetime extension

Repair	No
--------	----

## Use Again



### Repack and remanufacture

End of life manual availability	No need of specific recycling operations
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins




Performance Curves

115 V Single-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32•D18M2 servo drive

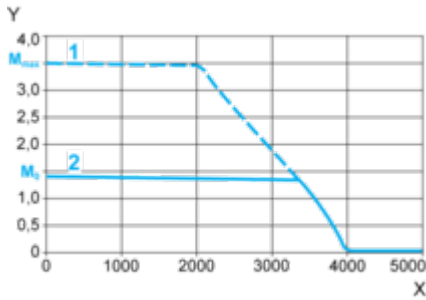

X Speed in rpm

Y Torque in Nm

1 Peak torque


2 Continuous torque

230 V Single-Phase Supply Voltage

---

Torque/Speed Curves

Servo motor with LXM32-U90M2 servo drive

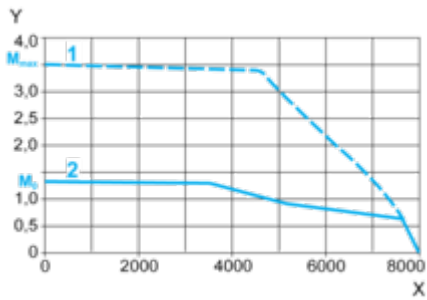

X Speed in rpm

Y Torque in Nm

1 Peak torque

2 Continuous torque