





Transformers

Transformers



X4045SF1

Primary voltage — 460/230/208V, 480/240V, 440/220/200V
Secondary voltage — 115/24V @, 120/25V, 110/23V

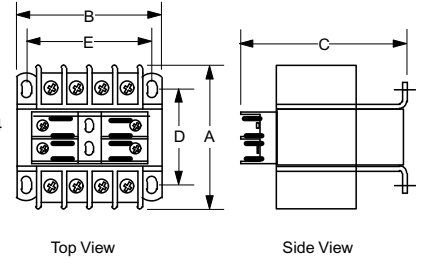



				Dimensions											
				A		B		C		D		E		Mounting slots	
VA Rating	Catalog number	List Price	Output Amps 24/115	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
45	X4045SF1	\$ 72.70	1.90 / 0.39	4 1/2	115	3	76	3 1/8	80	2 7/8	72	2 1/2	64	3/16 x 7/16	5 x 12
50	X4050PSF1	83.88	2.08 / 0.44	4 1/2	115	3	76	4	102	2 7/8	72	2 1/2	64	3/16 x 7/16	5 x 12
75	X4075PSF1	93.20	3.13 / 0.65	4 1/2	114	3 3/8	86	4 3/8	110	2 3/4	71	2 3/4	71	3/16 x 7/16	5 x 12
100	X4100PSF1	102.52	4.17 / 0.87	4 1/2	115	3 3/4	95	4 5/8	118	3	76	3 1/8	80	3/16 x 7/16	5 x 12
150	X4150PSF1	109.98	6.25 / 1.30	5	128	3 3/4	95	4 5/8	118	3 1/8	81	3 1/8	80	3/16 x 7/16	5 x 12
200	X4200PSF1	130.48	8.33 / 1.74	4 3/8	111	4 1/2	114	5 1/4	134	3	76	3 3/4	95	3/16 x 7/16	5 x 12
250	X4250PSF1	145.39	10.42 / 2.17	4 3/4	120	4 1/2	114	5 1/4	134	3	76	3 3/4	95	3/16 x 7/16	5 x 12
300	X4300PSF1	158.44	12.50 / 2.61	6 1/8	155	5 1/4	133	6	151	3 7/8	98	4 3/8	111	5/16 x 1 1/16	8 x 27
350	X4350PSF1	171.49	14.58 / 3.04	6 1/8	155	5 1/4	133	6	151	3 7/8	98	4 3/8	111	5/16 x 1 1/16	8 x 27
500	X4500PSF1	229.27	20.84 / 4.35	7 1/8	181	5 1/4	133	5 7/8	131	5.37	136	4 3/8	111	5/16 x 1 1/16	8 x 27



X4750PSF1

Primary voltage — 460/230/208V, 480/240V, 440/220/200V
Secondary voltage — 115V, 120V, 110V

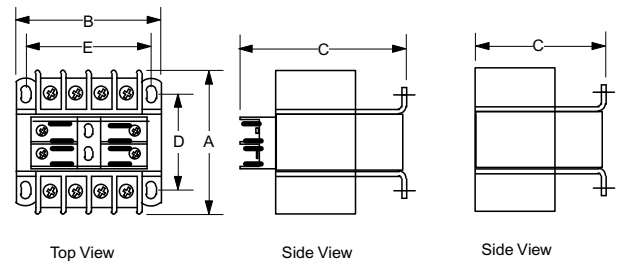

				Dimensions										Mounting slots	
		List Price	Output Amps	A		B		C		D		E			
VA Rating	Catalog Number					in	mm	in	mm	in	mm	in	mm	in	mm
750	X4750PS1	\$ 270.28	6.52	7 ⁵ / ₈	193	5 ¹ / ₄	133	6	151	5 ³ / ₄	146	4 ³ / ₈	111	5 ¹ / ₁₆ x 1 ¹ / ₁₆	8 x 27
1000	X41K1	298.24	8.70	7 ¹ / ₈	181	6 ³ / ₈	162	5 ³ / ₈	137	4 ¹ / ₂	114	5 ⁵ / ₁₆	135	5 ¹ / ₁₆ x 1 ¹ / ₁₆	8 x 17
1500	X41.5K1	428.72	13.04	7 ¹ / ₂	191	6 ³ / ₄	171	5 ¹¹ / ₁₆	144	4 ⁷ / ₈	113	6 ¹ / ₁₆	154	9 ¹ / ₃₂ x 9 ¹ / ₁₆	7 x 14
2000	X42K1	521.92	17.39	8 ¹ / ₄	210	6 ³ / ₄	171	5 ¹¹ / ₁₆	144	5 ¹ / ₄	133	6 ¹ / ₁₆	154	9 ³ / ₃₂ x 9 ¹ / ₁₆	7 x 14
3000	X43K1	736.28	26.09	8 ⁹ / ₁₆	217	9	229	7 ¹ / ₂	191	5 ³ / ₄	147	7 ¹ / ₂	191	7 ¹ / ₁₆ x 3 ³ / ₄	11 x 19
5000	X45K1	1,230.24	43.48	10 ¹ / ₂	267	9	229	10 ⁹ / ₁₆	259	6 ¹ / ₂	165	6 ¹ / ₂	165	7 ¹ / ₁₆ x 3 ³ / ₄	11 x 19



T41K1

① Primary & secondary fuse block provided as standard (750VA unit, only).

② Whenever both secondary voltages are to be used at the same time, remove the secondary fuse clip and use a separate mounted 2 pole fuse block.