

# General and Heavy Duty Safety Switches

## Accessories

## Selection



HR612

### Class R Fuse Clip Kits

All General Duty and Heavy Duty Switches are field convertible to accept Class R Fuse Clip Kits. The kits prevent the installation of Class H and K fuses (one kit required per 3-pole switch).

### Class R Fuse Clip Kits

| Catalog Number | Description                 |
|----------------|-----------------------------|
| GSRK321        | 30A, 240V Kit (GD only)     |
| HR21           | 30A, 240V Kit (HD only)     |
| HR612          | 30A, 600V Kit/60A, 240V Kit |
| HR62           | 60A, 600V Kit               |
| HR63           | 100A Kit                    |
| HR64           | 200A Kit                    |
| HR656          | 400A/600A Kit               |

### Class J Fusing

All 30-600A, 600V and 100-600A, 240V fusible Heavy Duty Switches are field convertible to accept Class J fuses by moving the load base to a pre-drilled J fuse position. All 100-600A, 240V fusible General Duty switches can also be field converted to accept Class J fuses.

### Internal Shield Kits (for fusible switches)

Kits provide a clear plastic inner door to prevent accidental contact with live parts. Test probe holes are provided and fuses can be replaced without removal of kit.

### NEW Internal Shield Kits ② (Availability to be announced)

| Switch Ampere Rating | Kit Catalog Number |
|----------------------|--------------------|
| 30A HD               | HSK61SSW           |
| 60A HD               | HSK62SSW           |
| 100A HD              | HSK63SSW           |
| 200A HD              | HSK64SSW           |

▲ Built to order. Allow 6-8 weeks for delivery.

② One kit per pole required.



HT63

### Class T Fuse Adapter Kits

All 100-600A, General Duty and 100-1200A Heavy Duty Switches are field convertible to accept Class T fuses. 400-600A switches are field convertible to accept Class T fuses by moving the load base to a pre-drilled T fuse position.

### Class T Fuse Adapter Kits①


| Catalog Number | Description     |
|----------------|-----------------|
| HT23           | 100A, 240V Kit  |
| HT63           | 100A, 600V Kit  |
| HT24           | 200A, 240V Kit  |
| HT64▲          | 200A, 600V Kit  |
| TFAK72         | 800A, 240V Kit  |
| TFAK75         | 800A, 600V Kit  |
| TFAK82         | 1200A, 240V Kit |

### Neutral Kits

Standard Neutral Kits can be field installed in General and Heavy Duty Switches.


### Neutral Kits

| Switch Ampere Rating | Kit Catalog Number |
|----------------------|--------------------|
| 30 GD                | W410190            |
| 30 HD, 60 GD         | HN612              |
| 60, 100 HD, 100 GD   | HN623              |
| 200                  | HN64               |
| 400 & 600            | HN656              |
| 800 & 1200           | HN678              |



HP61

② Not designed for use in Non-metallic 4X safety switches

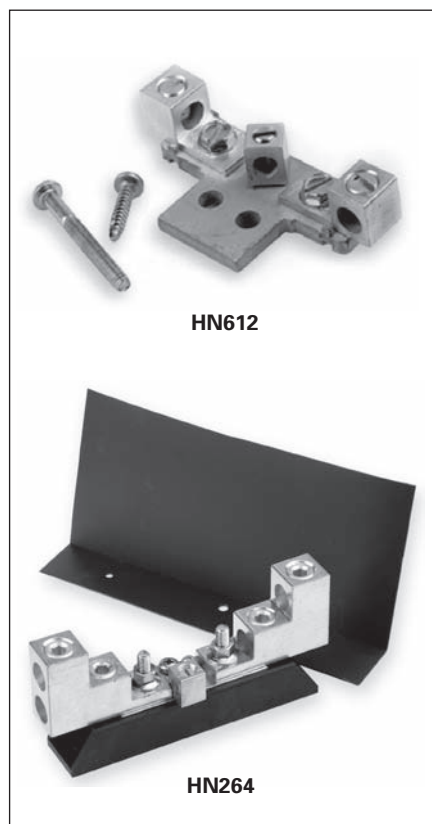

HN612

HN264

### 200% Neutral Kits

UL listed 200% Neutrals are available on 100-600A Heavy Duty Switches. They are typically used with non-linear transformers or where increased neutral ampacity/lug capacity is required.

### 200% Neutral Kits

| Switch Ampere Rating | Kit Catalog Number | Wire Range Line & Load Lugs (Cu/Al)            |
|----------------------|--------------------|------------------------------------------------|
| 100                  | HN263              | (2) #14-1/0 AWG                                |
| 200                  | HN264              | (2) #6 AWG-300 Kcmil                           |
| 400                  | HN656              | (2) 1/0 AWG-750 Kcmil or (4) 1/0 AWG-250 Kcmil |
| 600                  | HN678              | (4) 1/0 AWG-750 Kcmil                          |

### Fuse Puller Kits

Fuse Puller Kits are field installable in 30-100A Type VBII Heavy Duty Switches (one kit required per 3-pole switch).

### Fuse Puller Kits

| Switch Ampere Rating | Fuse Puller Kit Catalog Number |
|----------------------|--------------------------------|
| 30                   | HP61                           |
| 60                   | HP62▲                          |
| 100                  | HP63▲                          |