



SIRIUS soft starter 200-480 V 38 A, 110-250 V AC Screw terminals without bypass, Analog output

<b>product brand name</b>	SIRIUS
<b>manufacturer's article number</b>	<ul style="list-style-type: none"> <li>• of standard HMI module usable <a href="#">3RW5980-0HS00</a></li> <li>• of high feature HMI module usable <a href="#">3RW5980-0HF00</a></li> <li>• of communication module PROFINET standard usable <a href="#">3RW5980-0CS00</a></li> <li>• of communication module PROFIBUS usable <a href="#">3RW5980-0CP00</a></li> <li>• of communication module Modbus RTU usable <a href="#">3RW5980-0CR00</a></li> <li>• of circuit breaker usable at 400 V <a href="#">3RV2032-4WA10; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 500 V <a href="#">3RV2032-4WA10; Type of coordination 1, Iq = 10 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 400 V at inside-delta circuit <a href="#">3RV2032-4RA10; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 500 V at inside-delta circuit <a href="#">3RV2032-4RA10; Type of coordination 1, Iq = 10 kA, CLASS 10</a></li> <li>• of the gG fuse usable up to 690 V <a href="#">3NA3824-6; Type of coordination 1, Iq = 65 kA</a></li> <li>• of the gG fuse usable at inside-delta circuit up to 500 V <a href="#">3NA3824-6; Type of coordination 1, Iq = 65 kA</a></li> <li>• of full range R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE1021-2; Type of coordination 2, Iq = 65 kA</a></li> <li>• of back-up R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE8024-1; Type of coordination 2, (soft starter in conjunction with the associated protective device circuit breaker/fuse), Iq = 65 kA</a></li> </ul>
<b>General technical data</b>	
<b>starting voltage [%]</b>	30 ... 100 %
<b>stopping voltage [%]</b>	50 %; non-adjustable
<b>start-up ramp time of soft starter</b>	0 ... 20 s
<b>ramp-down time of soft starter</b>	0 ... 20 s
<b>current limiting value [%] adjustable</b>	130 ... 700 %
<b>product component is supported</b>	
• HMI-Standard	Yes
• HMI-High Feature	Yes
<b>product feature integrated bypass contact system</b>	No
<b>number of controlled phases</b>	3
<b>buffering time in the event of power failure</b>	
• for main current circuit	100 ms
• for control circuit	100 ms
<b>insulation voltage rated value</b>	480 V
<b>degree of pollution</b>	3, acc. to IEC 60947-4-2
<b>impulse voltage rated value</b>	6 V
<b>blocking voltage of the thyristor maximum</b>	1 400 V
<b>service factor</b>	1
<b>surge voltage resistance rated value</b>	6 kV

<b>maximum permissible voltage for protective separation</b>	
<ul style="list-style-type: none"> <li>● between main and auxiliary circuit</li> </ul>	480 V
<b>shock resistance</b>	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
<b>vibration resistance</b>	15 mm to 6 Hz; 2 g to 500 Hz
utilization category according to IEC 60947-4-2	AC-53b
<b>reference code according to IEC 81346-2</b>	Q
<b>Substance Prohibitance (day/month/year)</b>	05/18/2018
<b>SVHC substance name</b>	Lead CAS-No. 7439-92-1 Lead monoxide (lead oxide) CAS-No. 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol CAS-No. 79-94-7 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 Melamine CAS-No. 108-78-1 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol CAS-No. 119-47-1 Dibutylbis(pentane-2,4-dionato-O,O')tin CAS-No. 22673-19-4
<b>Net Weight</b>	5.2 kg
<b>product function</b>	
<ul style="list-style-type: none"> <li>● ramp-up (soft starting)</li> <li>● soft stopping</li> <li>● Soft Torque</li> <li>● adjustable current limitation</li> <li>● intrinsic device protection</li> <li>● motor overload protection</li> <li>● inside-delta circuit</li> <li>● auto-RESET</li> <li>● manual RESET</li> <li>● remote reset</li> <li>● communication function</li> <li>● operating measured value display</li> <li>● error logbook</li> <li>● via software parameterizable</li> <li>● via software configurable</li> <li>● <b>firmware update</b></li> <li>● <b>removable terminal for control circuit</b></li> <li>● voltage ramp</li> <li>● analog output</li> </ul>	Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes Yes; By turning off the control supply voltage Yes Yes; with optional HMI Yes No No Yes Yes Yes Yes; 4 ... 20 mA (default) / 0 ... 10 V (parameterizable with High Feature HMI)
<b>Power Electronics</b>	
<b>operational current</b>	
<ul style="list-style-type: none"> <li>● at 40 °C rated value</li> <li>● at 50 °C rated value</li> <li>● at 60 °C rated value</li> </ul>	38 A 33.5 A 30.5 A
<b>operational current at inside-delta circuit</b>	
<ul style="list-style-type: none"> <li>● at 40 °C rated value</li> <li>● at 50 °C rated value</li> <li>● at 60 °C rated value</li> </ul>	65.8 A 58 A 52.8 A
<b>operating voltage</b>	
<ul style="list-style-type: none"> <li>● rated value</li> <li>● at inside-delta circuit rated value</li> </ul>	200 ... 480 V 200 ... 480 V
<b>relative negative tolerance of the operating voltage</b>	-15 %
<b>relative positive tolerance of the operating voltage</b>	10 %
<b>relative negative tolerance of the operating voltage at inside-delta circuit</b>	-15 %
<b>relative positive tolerance of the operating voltage at inside-delta circuit</b>	10 %
<b>operating power for 3-phase motors</b>	
<ul style="list-style-type: none"> <li>● at 230 V at 40 °C rated value</li> <li>● at 230 V at inside-delta circuit at 40 °C rated value</li> <li>● at 400 V at 40 °C rated value</li> <li>● at 400 V at inside-delta circuit at 40 °C rated value</li> </ul>	11 W 18.5 W 18.5 W 30 W
<b>Operating frequency 1 rated value</b>	50 Hz
<b>Operating frequency 2 rated value</b>	60 Hz

<b>relative negative tolerance of the operating frequency</b>	-10 %
<b>relative positive tolerance of the operating frequency</b>	10 %
<b>adjustable motor current</b>	
• at rotary coding switch on switch position 1	15.5 A
• at rotary coding switch on switch position 2	17 A
• at rotary coding switch on switch position 3	18.5 A
• at rotary coding switch on switch position 4	20 A
• at rotary coding switch on switch position 5	21.5 A
• at rotary coding switch on switch position 6	23 A
• at rotary coding switch on switch position 7	24.5 A
• at rotary coding switch on switch position 8	26 A
• at rotary coding switch on switch position 9	27.5 A
• at rotary coding switch on switch position 10	29 A
• at rotary coding switch on switch position 11	30.5 A
• at rotary coding switch on switch position 12	32 A
• at rotary coding switch on switch position 13	33.5 A
• at rotary coding switch on switch position 14	35 A
• at rotary coding switch on switch position 15	36.5 A
• at rotary coding switch on switch position 16	38 A
• minimum	15.5 A
<b>adjustable motor current</b>	
• for inside-delta circuit at rotary coding switch on switch position 1	26.8 A
• for inside-delta circuit at rotary coding switch on switch position 2	29.4 A
• for inside-delta circuit at rotary coding switch on switch position 3	32 A
• for inside-delta circuit at rotary coding switch on switch position 4	34.6 A
• for inside-delta circuit at rotary coding switch on switch position 5	37.2 A
• for inside-delta circuit at rotary coding switch on switch position 6	39.8 A
• for inside-delta circuit at rotary coding switch on switch position 7	42.4 A
• for inside-delta circuit at rotary coding switch on switch position 8	45 A
• for inside-delta circuit at rotary coding switch on switch position 9	47.6 A
• for inside-delta circuit at rotary coding switch on switch position 10	50.2 A
• for inside-delta circuit at rotary coding switch on switch position 11	52.8 A
• for inside-delta circuit at rotary coding switch on switch position 12	55.4 A
• for inside-delta circuit at rotary coding switch on switch position 13	58 A
• for inside-delta circuit at rotary coding switch on switch position 14	60.6 A
• for inside-delta circuit at rotary coding switch on switch position 15	63.2 A
• for inside-delta circuit at rotary coding switch on switch position 16	65.8 A
• at inside-delta circuit minimum	26.8 A
<b>minimum load [%]</b>	15 %; Relative to smallest settable le
<b>power loss [W] for rated value of the current at AC</b>	
• at 40 °C after startup	12 W
• at 50 °C after startup	12 W
• at 60 °C after startup	12 W
<b>power loss [W] at AC at current limitation 350 %</b>	
• at 40 °C during startup	464 W
• at 50 °C during startup	399 W
• at 60 °C during startup	355 W

Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz	110 ... 250 V
• at 60 Hz	110 ... 250 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
control supply voltage frequency	50 ... 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	30 mA
inrush current peak at application of control supply voltage maximum	12.2 A
duration of inrush current peak at application of control supply voltage	2.2 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (I <sub>cu</sub> =1 kA), 6 A quick-acting fuse (I <sub>cu</sub> =1 kA), C1 miniature circuit breaker (I <sub>cu</sub> = 600 A), C6 miniature circuit breaker (I <sub>cu</sub> = 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	1
number of digital outputs	3
• not parameterizable	2
digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	+/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface
fastening method	screw fixing
height	321 mm
width	185 mm
depth	203 mm
required spacing with side-by-side mounting	
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
• downwards	75 mm
• at the side	5 mm
weight without packaging	5.2 kg
Connections/ Terminals	
type of electrical connection	
• for main current circuit	box terminal
• for control circuit	screw-type terminals
width of connection bar maximum	25 mm
type of connectable conductor cross-sections for main contacts for box terminal	
• using the front clamping point solid	1x (2.5 ... 16 mm <sup>2</sup> )
• using the front clamping point finely stranded with core end processing	1x (2.5 ... 50 mm <sup>2</sup> )
• using the front clamping point stranded	1x (10 ... 70 mm <sup>2</sup> )
• using the back clamping point solid	1x (2.5 ... 16 mm <sup>2</sup> )

<ul style="list-style-type: none"> <li>• using both clamping points solid</li> </ul>	2x (2.5 ... 16 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• using both clamping points finely stranded with core end processing</li> </ul>	2x (2.5 ... 35 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• using both clamping points stranded</li> </ul>	2x (6 ... 16 mm <sup>2</sup> ), 2x (10 ... 50 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• using the back clamping point finely stranded with core end processing</li> </ul>	1x (2.5 ... 50 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• using the back clamping point stranded</li> </ul>	1x (10 ... 70 mm <sup>2</sup> )
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• for control circuit solid</li> </ul>	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• for control circuit finely stranded with core end processing</li> </ul>	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
<b>wire length</b>	
<ul style="list-style-type: none"> <li>• between soft starter and motor maximum</li> </ul>	800 m
<ul style="list-style-type: none"> <li>• at the digital inputs at AC maximum</li> </ul>	100 m
<b>tightening torque</b>	
<ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> </ul>	4.5 ... 6 N·m
<ul style="list-style-type: none"> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>	0.8 ... 1.2 N·m
<b>tightening torque [lbf·in]</b>	
<ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> </ul>	40 ... 53 lbf·in
<ul style="list-style-type: none"> <li>• for auxiliary and control contacts with screw-type terminals</li> </ul>	7 ... 10.3 lbf·in

<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	5 000 mm
<b>ambient temperature</b>	
<ul style="list-style-type: none"> <li>• during operation</li> </ul>	-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above
<ul style="list-style-type: none"> <li>• during storage and transport</li> </ul>	-40 ... +80 °C
<b>environmental category</b>	
<ul style="list-style-type: none"> <li>• during operation according to IEC 60721</li> </ul>	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
<ul style="list-style-type: none"> <li>• during storage according to IEC 60721</li> </ul>	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
<ul style="list-style-type: none"> <li>• during transport according to IEC 60721</li> </ul>	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)

<b>Communication/ Protocol</b>	
<b>communication module is supported</b>	
<ul style="list-style-type: none"> <li>• PROFINET standard</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Modbus RTU</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• PROFIBUS</li> </ul>	Yes

<b>Approvals Certificates</b>		
<b>Environment</b>	<b>General Product Approval</b>	<b>EMV</b>

[Environmental Con-  
firmations](#)



other

[Confirmation](#)

[Confirmation](#)



**Further information**

- Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information for data generation and storage  
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
- Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5117-1XC14>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/3RW5117-1XC14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5117-1XC14&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5117-1XC14&lang=en)

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5117-1XC14>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RW5117-1XC14/char>


Characteristic: Installation altitude

[https://www.automation.siemens.com/bilddb/index.aspx?gridview=view2&objkey=G\\_NSB0\\_XX\\_01704&showdetail=true&view=Search](https://www.automation.siemens.com/bilddb/index.aspx?gridview=view2&objkey=G_NSB0_XX_01704&showdetail=true&view=Search)

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

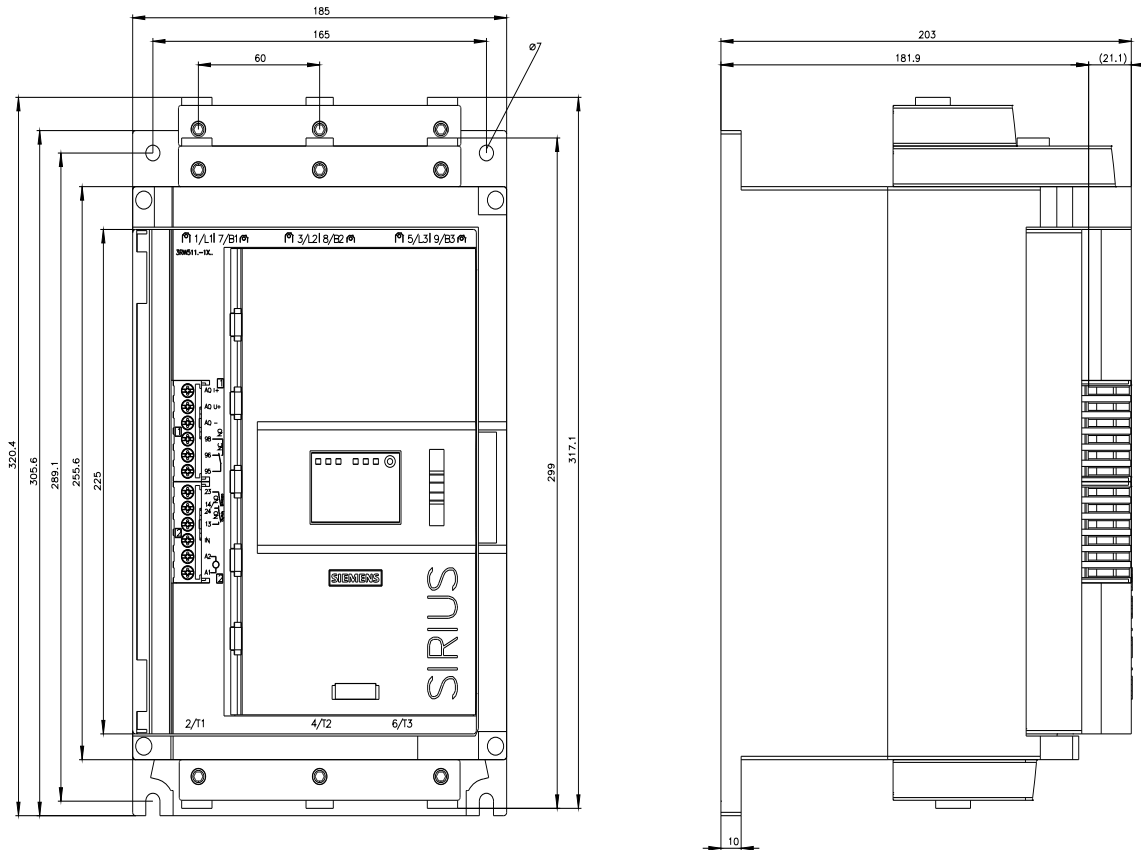

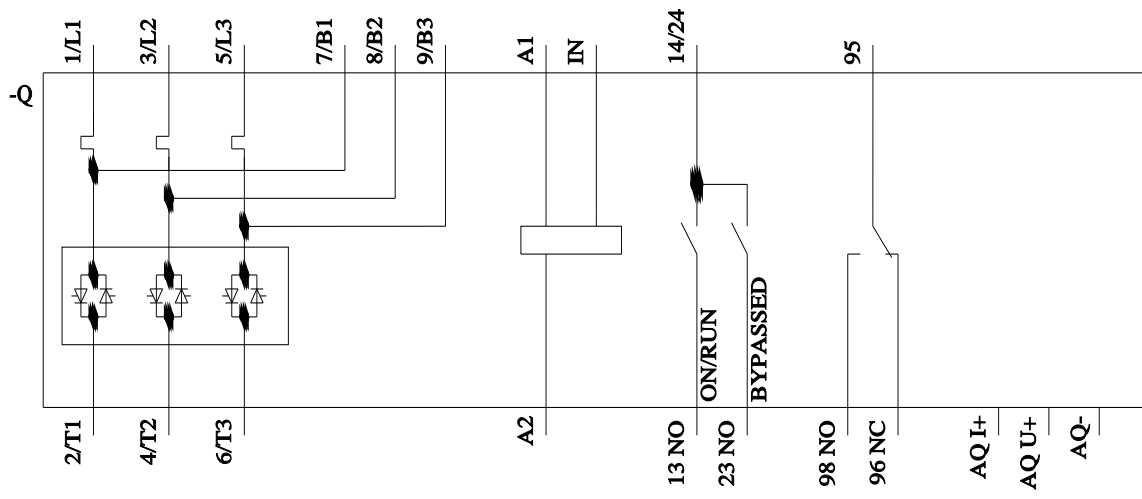

last modified:

4/4/2026

