



replacement control connector for 3RF30/ 31/32/33/34 spring-loaded connection system two clamping points per contact color black identifying marking A1 A2

product brand name	SIRIUS
product designation	control plug
product type designation	3RF39
General technical data	
product function	for 3RF3 solid-state relays / contactors
degree of pollution	3
protection class IP on the front according to IEC 60529	IP20
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	X
Substance Prohibittance (Date)	01/15/2024
Net Weight	0.02 kg
Main circuit	
number of NO contacts for main contacts	0
number of NC contacts for main contacts	0
operating frequency rated value	50 ... 60 Hz
derating temperature	40 °C
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method side-by-side mounting	Yes
fastening method	clip-on
width	10 mm
Connections/ Terminals	
type of electrical connection for auxiliary and control circuit	spring-loaded terminals
type of connectable conductor cross-sections	
• for auxiliary and control contacts	
— solid	1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1 mm²)
— finely stranded with core end processing	1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1 mm²)
— finely stranded without core end processing	1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1 mm²)
• for AWG cables for auxiliary and control contacts	1x (20 ... 12)
stripped length of the cable for auxiliary and control contacts	10 mm
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m

ambient temperature during storage	-55 ... +80 °C		
Electromagnetic compatibility			
conducted interference - due to burst according to IEC 61000-4-4 - due to conductor-earth surge according to IEC 61000-4-5 - due to conductor-conductor surge according to IEC 61000-4-5 - due to high-frequency radiation according to IEC 61000-4-6	2 kV / 5 kHz behavior criterion 2 2 kV behavior criterion 2 1 kV behavior criterion 2 140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1		
conducted HF interference emissions according to CISPR11	Class A for industrial environment		
Approvals Certificates			
General Product Approval	EMV	other	Environment




[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF3900-2TB88>
Cax online generator
<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF3900-2TB88>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RF3900-2TB88>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF3900-2TB88&lang=en

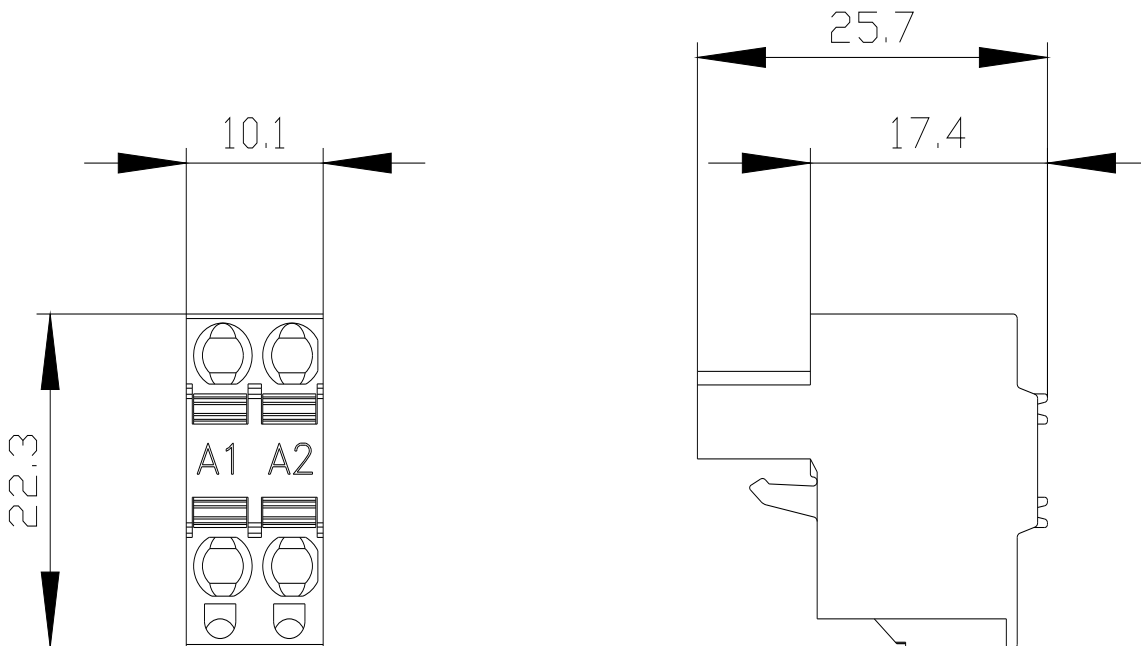

last modified:

10/14/2025 