


# Product data sheet

Specifications

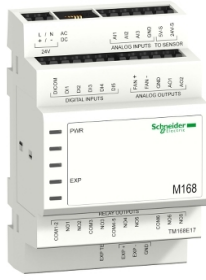

## M168 electronic expansion valve driver module with expansion bus port

TM168BEVCME

⚠ Discontinued on: Jan 26, 2021

⚠ Discontinued

### Main

Range of product	Modicon M168 logic controller
Product or component type	Application-specific expansion module
Product specific application	Control of electronic expansion valve
Connector type	Without connector

### Complementary

Discrete input number	2 no isolated digital input 1 isolated digital input
Contacts usage	Volt-free contacts
Discrete input voltage	100...240 V
Discrete input voltage type	AC/DC
Sensor power supply	12 V AC/DC
Voltage state 1 guaranteed	100 V auxiliary input
Analogue input number	1 2
Analogue input type	Voltage 0...10 V or 0...5 V ratio Current 0...20 mA/4...20 mA Temperature probe -100...400 °C Pt 1000 Temperature probe -50...+120 °C NTC 10k
Discrete output voltage	250 V AC
Discrete output current	5000 mA
Electrical durability	100000 cycles 24 V AC 100000 cycles 24...37 V DC
Mounting support	35 mm symmetrical DIN rail
Width	2.8 in (71 mm)
Height	5.04 in (128 mm)
Depth	2.4 in (60 mm)
Net weight	0.379 lb(US) (0.172 kg)

### Environment

Standards	EN 60730-1 EN 61000-6-3 2006/95/EEC EN 61000-6-1 UL 60730
-----------	---

<b>Marking</b>	UL CE
<b>Ambient air temperature for operation</b>	14...140 °F (-10...60 °C)
<b>Ambient air temperature for storage</b>	-13...140 °F (-25...60 °C)
<b>Relative humidity</b>	10...90 % without condensation
<b>IP degree of protection</b>	IP20
<b>Pollution degree</b>	2
<b>Overvoltage category</b>	III
<b>Operating altitude</b>	0...2000 m

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	3.1 in (8.0 cm)
<b>Package 1 Width</b>	4.3 in (11.0 cm)
<b>Package 1 Length</b>	6.1 in (15.5 cm)
<b>Package 1 Weight</b>	10.1 oz (287.0 g)



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Longer



#### Lifetime extension

Repair


No

Dimensions Drawings

Electronic Expansion Valve Module

---


Dimensions

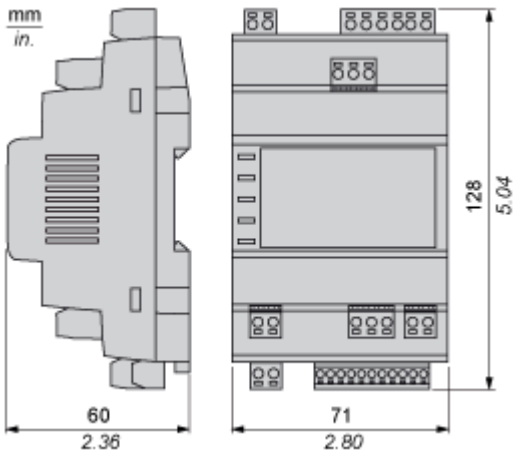


Mounting and Clearance

Mounting and Clearance


---

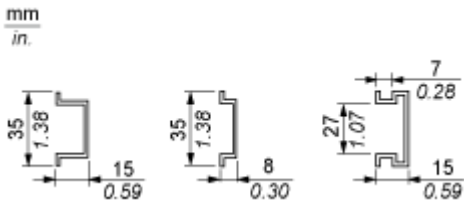


Mounting

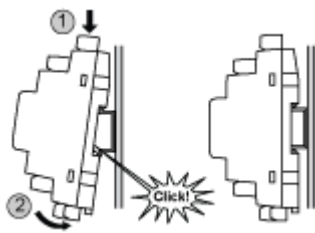

Dismounting

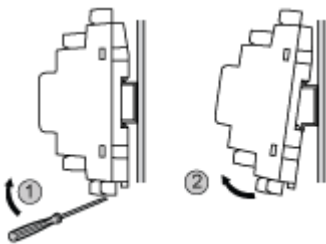

Misplacement

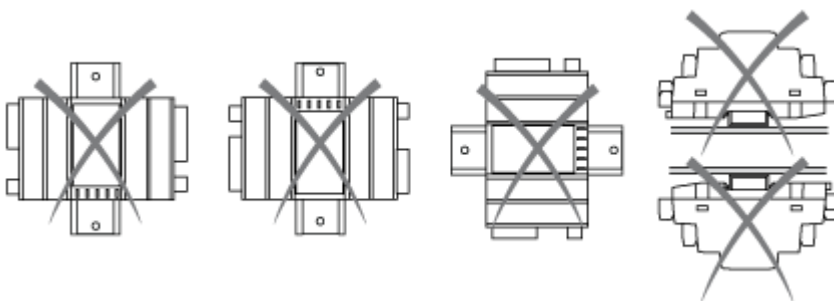


Connections and Schema

Power Supply

---

Wiring Diagram

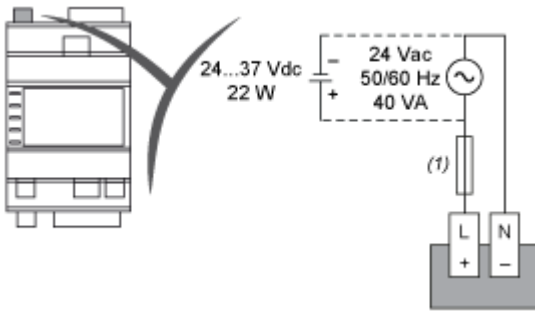


(1) 2 A Type T 250 V AC

Dry Contact Digital Inputs

---


Wiring Diagram

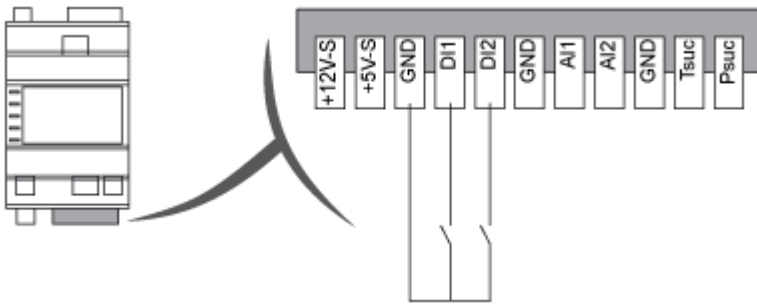


Digital Outputs

---

Wiring Diagram

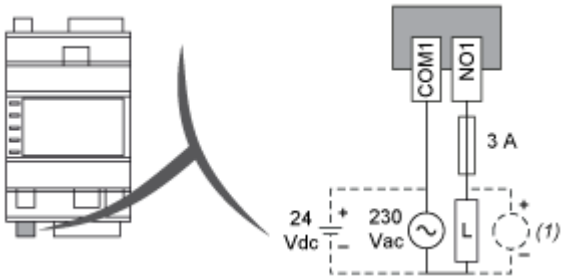


(1) Protection for inductive load



Analog Inputs

---

Temperature and Voltage Sensing

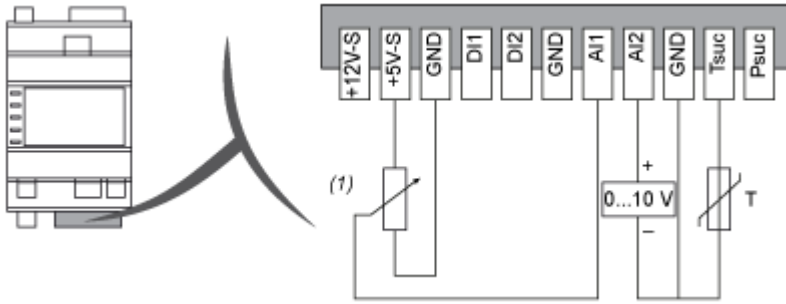


(1) Ratio

Analog Inputs

---

Current Sensing

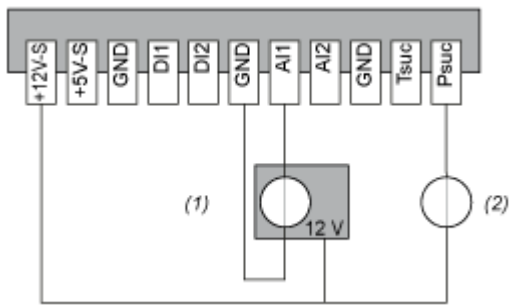


- (1) 20 mA 3-wire Sensor
- (2) 20 mA 2-wire Sensor

115/230 V AC Digital Input

---

Wiring Diagram

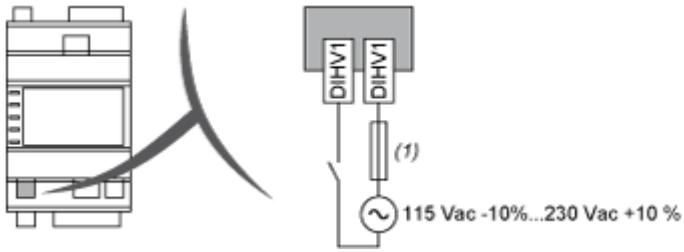


(1) 2.5 mA Type T

**Bipolar Stepper Motor Digital Outputs**

---


**Electronic Expansion Valve**

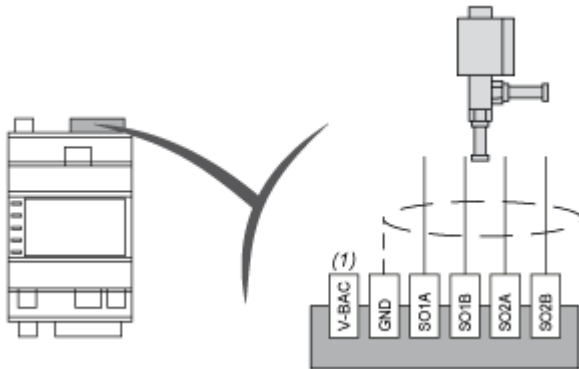

(1) Reserved for the backup power supply module

Modbus Serial Line Communication

---

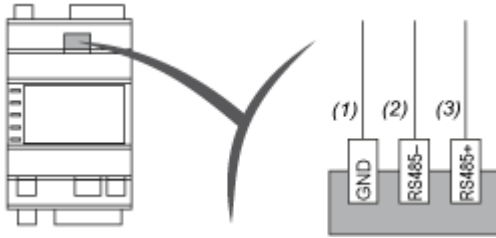






- (1) BR - Brown
- (2) WH - White / BL - Blue
- (3) BL - Blue

**Wiring Requirements**

---

**Cable Types and Wire Sizes**

				
mm <sup>2</sup>	0,08...2,5	0,25...2,5	0,25...1,5	2 x 0,25...2 x 0,75
AWG	28...14	24...14	24...16	2 x 24...2 x 18

Use copper conductors only. Use shielded cables for Modbus.