

Product data sheet

Specifications



Modicon Quantum discrete output module - 32 O - negative logic - 2 words

140DDO35310C

⚠ Discontinued on: 31 December 2021

⚠ To be end-of-service on: 31 December 2029

⚠ Discontinued - Service only

Main

Range of product	Modicon Quantum automation platform
Product or component type	Dc discrete output module
Discrete output number	32

Complementary

Group of channels	4 groups of 8
Discrete output logic	Negative logic (sink)
Addressing requirement	2 output words
Discrete output voltage	24 V DC
Output voltage limits	19.2...30 V
Absolute maximum output	50 V for 1 s decaying pulse
Maximum voltage drop	<0.4 V 0.5 A
Maximum load current	16 A per module 4 A per group
Surge current	5 A for 1 ms
Response time	<= 1 ms at state 0 to state 1 <= 1 ms at state 1 to state 0
Maximum leakage current	0.4 mA 30 V
Load inductance	$Inductance(H) = 0.5 / ((current(A))^2 \times (switching\ frequency(Hz)))$
Maximum tungsten load	12 W 24 V
Fault indication	Loss of field power Blown fuse
Associated fuse rating	3 A each point 5 A per group
Isolation between channels and bus	1780 Vrms DC for 1 minute
Isolation between group	500 Vrms DC for 1 minute
Protection type	Internal output protection by 5 A fuse per group
Power dissipation	2.0 W + (0.4 V x total load current)
Marking	CE
Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault detected (F)

	32 LEDs (green) for input status
Bus current requirement	330 mA
Module format	Standard
Net weight	0.45 kg

Environment

Protective treatment	Conformal coating Humiseal 1A33
Product certifications	RMRS GOST C-Tick RINA FM Class 1 Division 2
Standards	CSA C22.2 No 142 UL 508
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.3 cm
Package 1 Width	4.5 cm
Package 1 Length	31.2 cm
Package 1 Weight	470 g
Unit Type of Package 2	S02
Number of Units in Package 2	2
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	888 g

Offer Sustainability


Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------


Racks for Modules Mounting

Dimensions of Modules and Racks

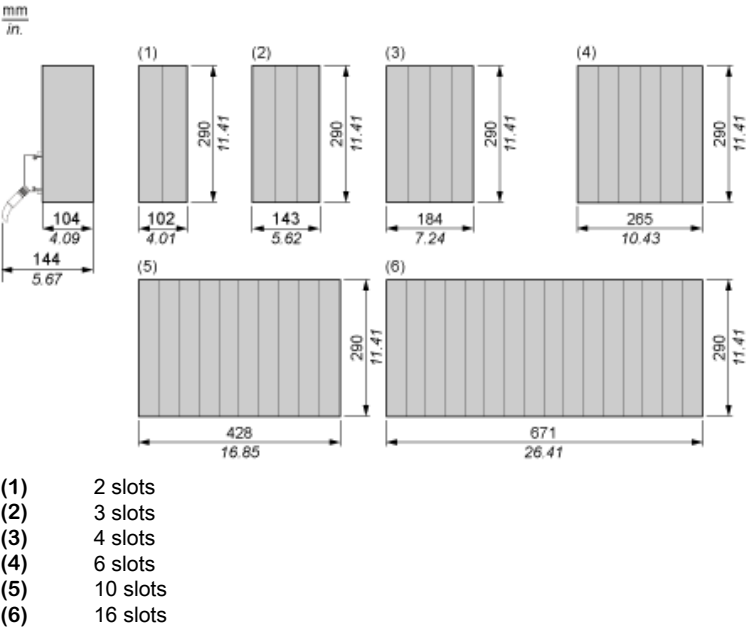

24 Vdc Discrete Output Sink Module

Wiring Diagram

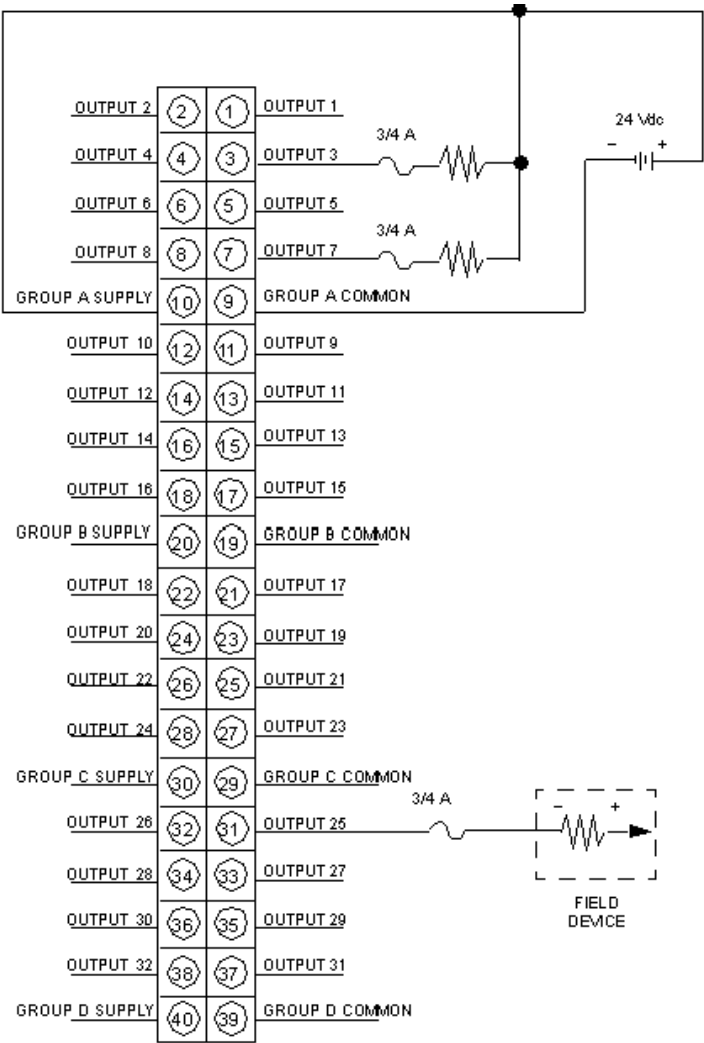

Recommended replacement(s)

140DDO35310C is replaced by:

1x



discrete output module X80 - 16 O - solid state - 24 V DC - severe
BMXDDO1612H