

Product datasheet

Specifications



3 phase control relay, Harmony Control Relays, 480 to 690V AC, phase sequence, phase failure, phase imbalance, UV and OV

RM35TF36

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Multifunction 3-Phase Supply Control Relays


Dimensions and Mounting

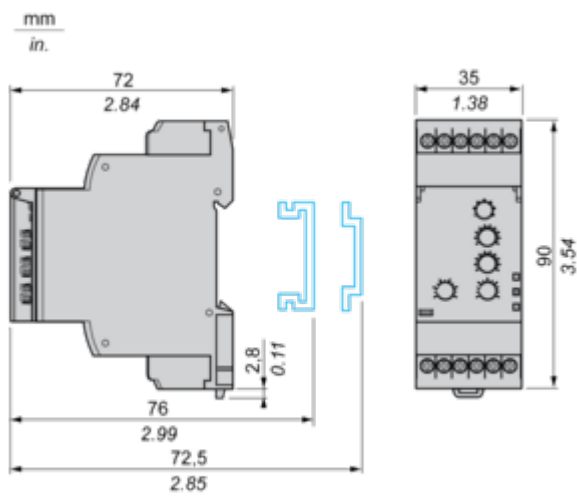

Connections and Schema

Multifunction 3-Phase Supply Control Relays


Wiring Diagram




Technical Description

Function Diagrams

Phase Sequence Control, Phase Failure Detection ($U_{\text{measured}} < 0.7 \times \text{nominal supply voltage}$) and Asymmetry Detection

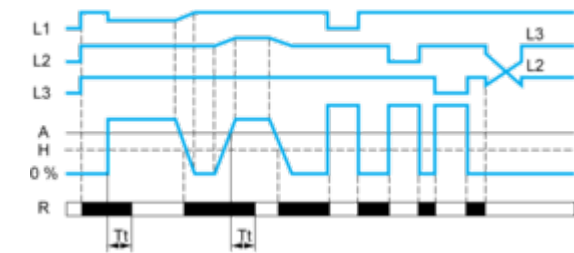

Control of Overvoltage and Undervoltage in Window Mode

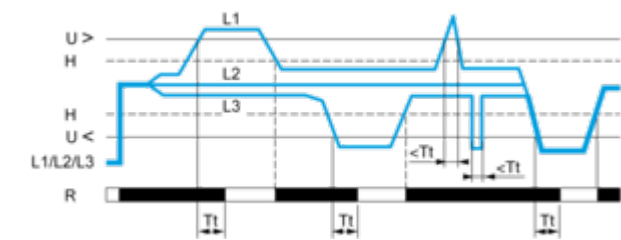

Legend

- A Asymmetry threshold
- Tt Time delay after crossing of threshold
- H Hysteresis
- U> Overvoltage threshold
- U< Undervoltage threshold
- L1, L2, L3 Phases of the supply voltage monitored
- R Output relay
- Relay status: black color = energized.