

LED cover for position switch Plastic 3SE52, for Enclosure according to EN 50047, 31 mm LEDs, yellow/green, 110-230 V AC Color yellow

|                                                                   |                                                                    |
|-------------------------------------------------------------------|--------------------------------------------------------------------|
| product brand name                                                | SIRIUS                                                             |
| product designation                                               | cover with LEDs 230 V AC, for EN 50047 enclosures, plastic, yellow |
| product type designation                                          | 3SE5                                                               |
| <b>General technical data</b>                                     |                                                                    |
| protection class IP                                               | IP65                                                               |
| shock resistance                                                  |                                                                    |
| • according to IEC 60068-2-27                                     | 30 g / 11 ms                                                       |
| vibration resistance                                              |                                                                    |
| • according to IEC 60068-2-6                                      | 0.35 mm/5 g                                                        |
| Substance Prohibitance (day/month/year)                           | 07/01/2006                                                         |
| Net Weight                                                        | 0.013 kg                                                           |
| length of the sensor                                              | 53 mm                                                              |
| width of the sensor                                               | 31 mm                                                              |
| <b>Ambient conditions</b>                                         |                                                                    |
| ambient temperature                                               |                                                                    |
| • during operation                                                | -25 ... +60 °C                                                     |
| • during storage                                                  | -40 ... +90 °C                                                     |
| explosion protection category for dust                            | none                                                               |
| <b>Enclosure</b>                                                  |                                                                    |
| design of the housing                                             | block, narrow                                                      |
| coating of the enclosure                                          | Other types                                                        |
| <b>Drive Head</b>                                                 |                                                                    |
| design of the actuating element                                   | without                                                            |
| <b>Installation/ mounting/ dimensions</b>                         |                                                                    |
| mounting position                                                 | any                                                                |
| fastening method                                                  | screw fixing                                                       |
| <b>Supply voltage</b>                                             |                                                                    |
| type of voltage of the supply voltage of the optional LED display | AC                                                                 |
| supply voltage of LED                                             |                                                                    |
| •                                                                 | 230 V                                                              |
| design of the interface for safety-related communication          | without                                                            |
| <b>Communication/ Protocol</b>                                    |                                                                    |
| design of the interface                                           | without                                                            |
| <b>Approvals Certificates</b>                                     |                                                                    |
| General Product Approval                                          | Test Certificates                                                  |



[Type Test Certificates/Test Report](#)

other

Environment

[Confirmation](#)

[Confirmation](#)



[Environmental Confirmations](#)



**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5230-3AA00-1AG0>

**Cax online generator**


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5230-3AA00-1AG0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3SE5230-3AA00-1AG0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SE5230-3AA00-1AG0&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5230-3AA00-1AG0&lang=en)

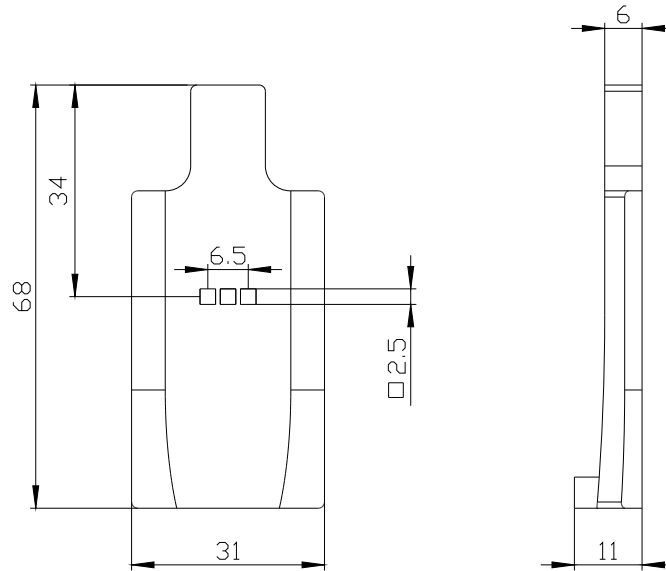

last modified:

4/4/2026 