

Product data sheet

Specifications



TeSys F reversing contactor - 3P(3 NO) AC-3 <= 440 V 265 A 220 V AC 40...400 Hz

LC2F265M7

⚠ Discontinued on: Jul 2, 2025

⚠ Discontinued

Main

Range	TeSys
Product name	TeSys F
Product or Component Type	Reversing contactor
Device short name	LC2F
Contactor application	Motor control Resistive load
Utilisation category	AC-3 AC-1
Device presentation	Preassembled with reversing power busbar
Poles description	3P
power pole contact composition	3 NO
[Ue] rated operational voltage	<= 1000 V AC 50/60 Hz <= 460 V DC
[Ie] rated operational current	265 A (at <104 °F (40 °C)) at <= 440 V AC AC-3 350 A (at <104 °F (40 °C)) at <= 440 V AC AC-1
Motor power kW	132 kW 380...400 V AC 50/60 Hz 140 kW 415 V AC 50/60 Hz 140 kW 440 V AC 50/60 Hz 147 kW 1000 V AC 50/60 Hz 160 kW 500 V AC 50/60 Hz 75 kW 220...240 V AC 50/60 Hz 160 kW 660...690 V AC 50/60 Hz
Control circuit type	AC 40...400 Hz
[Uc] control circuit voltage	220 V AC 40...400 Hz
[Uimp] rated impulse withstand voltage	8 kV
Overvoltage category	III
[Ith] conventional free air thermal current	350 A (at 104 °F (40 °C))
Irms rated making capacity	2650 A AC conforming to IEC 60947-4-1
Rated breaking capacity	2120 A conforming to IEC 60947-4-1
[Icw] rated short-time withstand current	2200 A 104 °F (40 °C) - 10 s 1230 A 104 °F (40 °C) - 30 s 950 A 104 °F (40 °C) - 1 min 620 A 104 °F (40 °C) - 3 min 480 A 104 °F (40 °C) - 10 min
Associated fuse rating	315 A aM at <= 440 V 400 A gG at <= 440 V
Average impedance	0.3 mOhm - Ith 350 A 50 Hz

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Ui] rated insulation voltage	1000 V IEC 60947-4-1 1500 V VDE 0110 group C
Power dissipation per pole	21 W AC-3
Interlocking type	Mechanical
Mounting Support	Plate
Standards	IEC 60947-1 EN 60947-4-1 JIS C8201-4-1 IEC 60947-4-1 EN 60947-1
Product Certifications	CCC LROS (Lloyds register of shipping) RMRoS DNV CB ABS UL CSA RINA UKCA
Connections - terminals	Control circuit screw clamp terminals 1 0.002...0.006 in² (1...4 mm²)flexible without cable end Control circuit screw clamp terminals 2 0.002...0.006 in² (1...4 mm²)flexible without cable end Control circuit screw clamp terminals 1 0.002...0.006 in² (1...4 mm²)flexible with cable end Control circuit screw clamp terminals 2 0.002...0.004 in² (1...2.5 mm²)flexible with cable end Control circuit screw clamp terminals 1 0.002...0.006 in² (1...4 mm²)solid without cable end Control circuit screw clamp terminals 2 0.002...0.006 in² (1...4 mm²)solid without cable end Power circuit bar 2 32 x 4 mm Power circuit connector 1 0.4 in² (240 mm²) Power circuit lugs-ring terminals 1 0.4 in² (240 mm²)
Tightening torque	Control circuit 10.6 lbf.in (1.2 N.m) Power circuit 309.8 lbf.in (35 N.m)
Operating time	40...65 ms closing 100...170 ms opening
Mechanical durability	10 Mcycles
Maximum operating rate	2400 cyc/h 131 °F (55 °C)

Complementary

Control circuit voltage limits	Operational: 0.85...1.1 Uc at 40...400 Hz (at <131 °F (55 °C)) Drop-out: 0.15...0.2 Uc at 40...400 Hz (at <131 °F (55 °C))
Inrush power in VA	650 VA 40...400 Hz cos phi 0.9 (at 68 °F (20 °C))
Hold-in power consumption in VA	10 VA 40...400 Hz cos phi 0.9 (at 68 °F (20 °C))
Heat dissipation	8 W

Environment

IP degree of protection	IP20 front face with shrouds IEC 60529 IP20 front face with shrouds VDE 0106
Protective treatment	TH
Ambient Air Temperature for Operation	23...131 °F (-5...55 °C)
Ambient Air Temperature for Storage	-76...176 °F (-60...80 °C)
Permissible ambient air temperature around the device	-40...158 °F (-40...70 °C)

Operating altitude	9842.52 ft (3000 m) without derating
Mechanical robustness	Vibrations contactor open2 Gn, 5...300 Hz Shocks contactor closed15 Gn for 11 ms Vibrations contactor closed5 Gn, 5...300 Hz Shocks contactor open6 Gn for 11 ms
Height	8.0 in (203 mm)
Width	16.7 in (425 mm)
Depth	8.4 in (213 mm)
Net Weight	37.65 lb(US) (17.08 kg)

Ordering and shipping details

Category	22337-CTR,F-LINE,AC,OPEN,REV
Discount Schedule	I12
GTIN	3389110375008
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.6 in (24.5 cm)
Package 1 Width	12.008 in (30.5 cm)
Package 1 Length	24.6 in (62.5 cm)
Package weight(Lbs)	40.495 lb(US) (18.368 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Total lifecycle Carbon footprint	2 020 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	284 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	3 kg CO2 eq.
Carbon footprint of the installation phase [A5]	1 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	1 705 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	26 kg CO2 eq.

Use Better

 Materials and Substances	
EU RoHS Directive	Compliant with Exemptions
SCIP Number	B2d4179a-eb65-40a3-a1ef-d9a33060486f
REACH Regulation	REACH Declaration
PVC free	Yes

Use Longer

 Lifetime extension	
Repair	No


Use Again

 Repack and remanufacture	
Recyclability potential, in %	91
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions and Drawings

Pre-assembled: LC2 F115 to F265 (Reverser supplied on 2 bars which can be used for fixing the device)

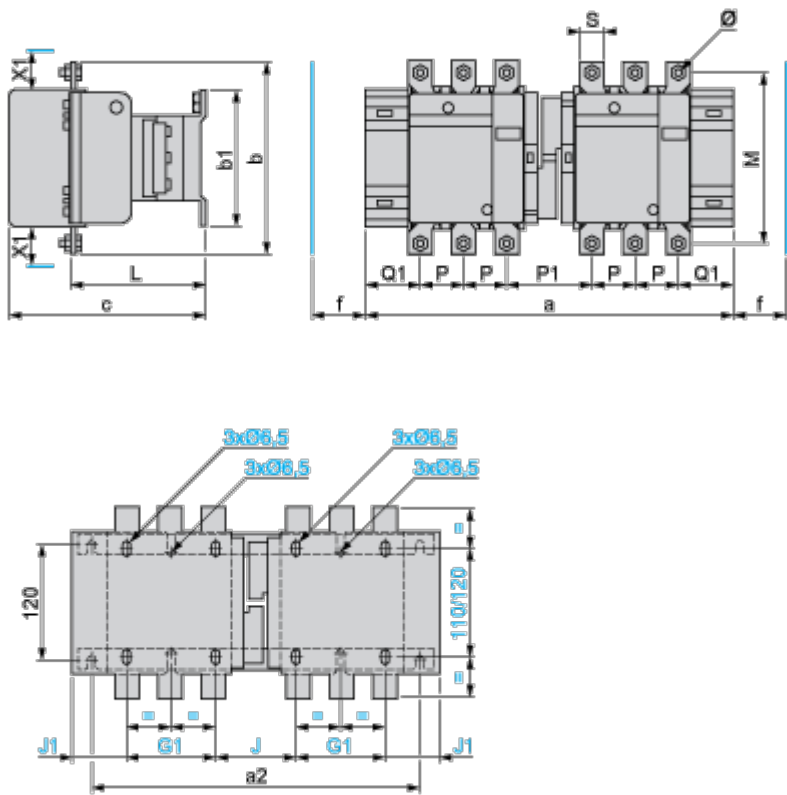

NOTE: Bar fixing centers Vertical: 120 mm, Horizontal: a2 see table.

NOTE: X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.


LC1	200...500 V	660...1000 V
F115, F150	10	15
F185	10	15
F225, F265	10	15

LC2		a	a2	b	b1	c	G1	J	J1	L	M	P	P1	Q1	S	f	Ø
F115	3P	345	317	162	137	171	80	71	57	107	147	37	77	60	20	131	M6
	4P	419	378	162	137	171	80	108	75.5	107	147	37	77	60	20	131	M6
F150	3P	345	317	170	137	171	80	71	57	107	150	40	71	57	20	131	M8
	4P	422	381	170	137	171	80	111	75.5	107	150	40	71	55.5	20	131	M8


LC2		a	a2	b	b1	c	G1	J	J1	L	M	P	P1	Q1	S	f	Ø
F185	3P	357	326	174	137	181	80	78	59.5	113.5	154	40	78	59.5	20	130	M8
	4P	437	390	174	137	181	80	118	79.5	113.5	154	40	78	59.5	20	130	M8
F225	3P	357	326	197	137	181	80	78	59.5	113.5	172	48	62	51.5	25	130	M10
	4P	437	390	197	137	181	80	118	79.5	113.5	172	48	54	47.5	25	130	M10
F265	3P	425	386	203	145	213	96	109	61.5	141	178	48	100	66.5	25	147	M10
	4P	521	464	203	145	213	96	157	85.5	141	178	48	100	66.5	25	147	M10

NOTE: For customer assembly, fixing recommended on AM1 EC uprights, please consult your Regional Sales Office.

2 x LC1 F115 to F330

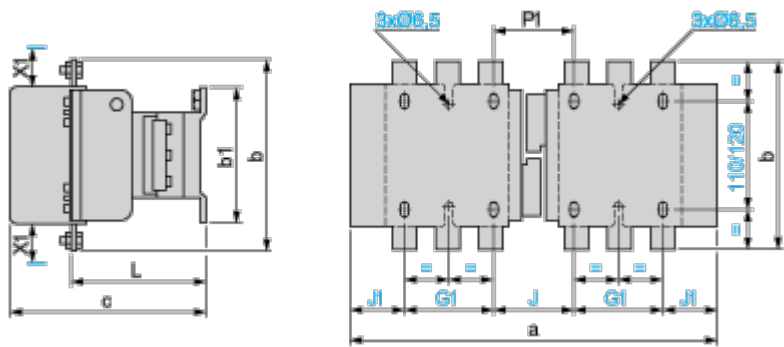

2 x LC1 F400, F500, F630, F800

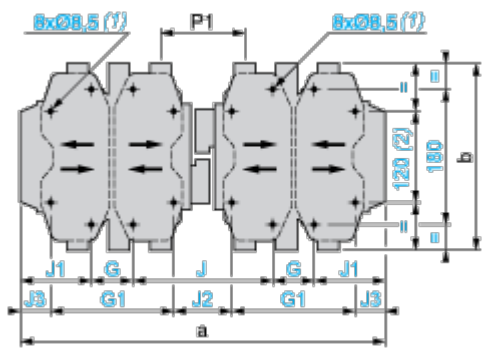

- (1) Except LC1 F630 and F800: 4 x Ø10.5.
- (2) Except LC1 F630 and F800.

NOTE: X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

LC1	200...500 V	660...1000 V	200...690 V	1000 V
F115, F150	10	15	–	–


LC1	200...500 V	660...1000 V	200...690 V	1000 V
F185	10	15	–	–
F225, F265	10	15	–	–
F330	10	15	–	–
F400	15	20	–	–
F500	15	20	–	–
F630	20	30	–	–
F800	–	–	10	20

2 x LC1		a	b	b1	c	G	G1	J	J1	J2	J3	L	P1
F115	3P	345	162	137	171	–	80	71	57	–	–	107	77
	4P	419	162	137	171	–	80	108	75.5	–	–	107	77
F150	3P	345	170	137	171	–	80	71	57	–	–	107	71
	4P	422	170	137	171	–	80	111	75.5	–	–	107	71
F185	3P	357	174	137	181	–	80	78	59.5	–	–	113.5	78
	4P	437	174	137	181	–	80	118	79.5	–	–	113.5	78
F225	3P	357	197	137	181	–	80	78	59.5	–	–	113.5	62
	4P	437	197	137	181	–	80	118	79.5	–	–	113.5	54
F265	3P	425	203	145	213	–	96	109	61.5	–	–	141	100
	4P	521	203	145	213	–	96	157	85.5	–	–	141	100
F330	3P	447	206	145	219	–	96	124	65.5	–	–	145	107
	4P	543	206	145	219	–	96	172	89.5	–	–	145	107
F400	3P	446	206	209	219	80	170	157	64.5	67	19.5	145	107
	4P	542	206	209	219	80	170	157	112.5	67	67.5	145	107
F500	3P	485	238	209	232	80	170	156	84.5	66	39.5	146	112
	4P	595	238	209	232	140	230	156	79.5	66	34.5	146	112
F630	3P	636	304	280	255	180	–	139	68.5	–	–	155	137
	4P	796	304	280	255	240	–	139	88.5	–	–	155	137
F800	3P	636	304	280	255	180	–	139	68.5	–	–	155	137


Connections and Schema

Connections and Schema


Reversing contactors for motor control LC2 F: 2xLC1 F Horizontally mounted

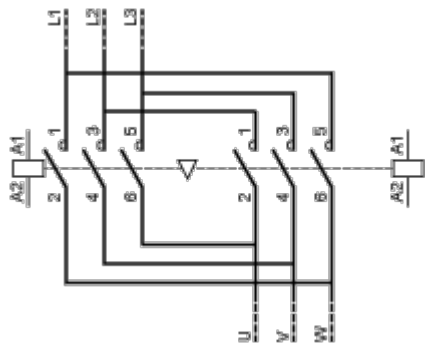


Reversing contactors for motor control LC2 F: 2xLC1 F Vertically mounted



Changeover contactor pairs for distribution LC2 F: 2xLC1 F Horizontally mounted



Changeover contactor pairs for distribution LC2 F: 2xLC1 F Vertically mounted

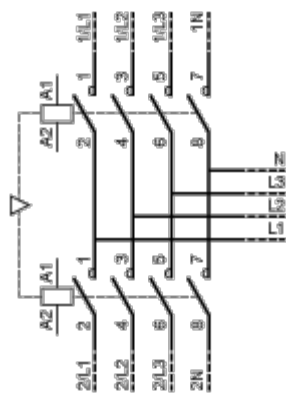

Electrical interlocking of reversers fitted with mechanical interlock without integral electrical contacts: LA9 F

