

Product datasheet

Specifications



motion servo drive - Lexium 26 - three phase 200...230 V - 3 kW

LXM26DU30M3X

⚠ Discontinued on: 27 Aug 2020

⚠ To be end-of-service on: 30 Jun 2028

⚠ Discontinued

Main

| | |
|---------------------------|--------------------------------------|
| Range of product | Easy Lexium 26 |
| Device short name | LXM26D |
| Product or component type | Motion servo drive |
| Format of the drive | Compact housing |
| Line current | 11.8 A 155.8 % at 220 V, three phase |

Complementary

| | |
|---------------------------|---|
| Network number of phases | Three phase |
| [Us] rated supply voltage | 220 V (- 10...15 %) for three phase |
| Supply voltage limits | 170...255 V three phase |
| Supply frequency | 50/60 Hz - 5...5 % |
| Network frequency | 47.5...63 Hz |
| Continuous output current | 19.8 A at 8 kHz |
| Output current 3s peak | 60 A at 220 V |
| Continuous power | 3000 W at 220 V |
| Nominal power | 3 kW at 220 V 8 kHz |
| Switching frequency | 8 kHz |
| Overvoltage category | III |
| Maximum leakage current | 1.6 mA |
| Output voltage | <= power supply voltage |
| Electrical isolation | Between power and control |
| Type of cable | Twisted shielded pairs cable (single or double) (temperature: 0...55 °C) |
| Electrical connection | Spring terminal, clamping capacity: 6 mm ² , AWG 10 (L1-L2) Spring terminal, clamping capacity: 6 mm ² , AWG 10 (R, S, T) Spring terminal, clamping capacity: 6 mm ² , AWG 10 (U, V, W, PE) Spring terminal, clamping capacity: 6 mm ² , AWG 10 (PA+, PBe) |
| Tightening torque | PE (ground): 1.4 N.m |
| Discrete input number | 8 programmable (CN1) 1 pulse train input (PTI) (CN1) 2 fast capture (CN1) |
| Discrete input voltage | 24 V DC for logic |
| Discrete input logic | Positive or negative (CN1) |

| | |
|--------------------------------|---|
| Discrete output number | 5 1 |
| Discrete output type | Logic (CN1) at 12...24 V DC Pulse train output (PTO) (CN1) |
| Discrete output voltage | 12...24 V DC |
| Discrete output logic | Positive or negative (CN1) |
| Analogue input number | 2 |
| Absolute accuracy error | 0.1 % |
| Analogue input type | V_REF voltage analog input: - 10...10 V, impedance: 10 kOhm, resolution: 12 bits T_REF voltage analog input |
| Control signal type | Servo motor encoder feedback CN2 |
| Protection type | Against reverse polarity: inputs signal Against short-circuits: outputs signal Overcurrent: motor Overvoltage: motor Undervoltage: motor Overheating: motor Overload: motor Overspeed: motor |
| Physical interface | RS485 for Modbus Serial line slave |
| Status LED | 1 LED (red) charge |
| Signalling function | Servo status and fault codes five 7-segment display units |
| Marking | CULus CE |
| Type of cooling | Integrated fan |
| Operating position | Vertical |
| Product compatibility | Servo motor BCH2 (180 mm, 2 motor stacks) |
| Width | 117.4 mm |
| Height | 234 mm |
| Depth | 193 mm |
| Net weight | 3.2 kg |

Environment

| | |
|--|--|
| EMC filter | Without EMC filter |
| Electromagnetic compatibility | Conducted emission - test level: level 3 category C3 conforming to IEC 61800-3 |
| Standards | IEC 61800-5-1 |
| Product certifications | cULus CE |
| IP degree of protection | IP20 |
| Vibration resistance | 3M4 amplitude = 3 mm (f = 9...200 Hz) conforming to IEC 60721-3-3 |
| Shock resistance | 10 gn, type I conforming to IEC 60068-2-27 |
| Relative humidity | 5...95 % without condensation |
| Ambient air temperature for operation | 0...55 °C |
| Ambient air temperature for storage | -25...65 °C |
| Operating altitude | <= 1000 m without derating > 1000...2000 m 1 % per 100 m |

Packing Units

| | |
|------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 19.6 cm |
| Package 1 Width | 25.8 cm |
| Package 1 Length | 34.7 cm |
| Package 1 Weight | 4.982 kg |

Contractual warranty

| | |
|----------------------|----|
| Warranty (in months) | 18 |
|----------------------|----|



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

| | |
|--|---|
| Total lifecycle Carbon footprint | 13 809 kg CO2 eq. |
| Environmental Disclosure | Product Environmental Profile |
| Carbon footprint of the manufacturing phase [A1 to A3] | 80 kg CO2 eq. |
| Carbon footprint of the distribution phase [A4] | 0.6 kg CO2 eq. |
| Carbon footprint of the installation phase [A5] | 0 kg CO2 eq. |
| Carbon footprint of the use phase [B2, B3, B4, B6] | 13 726 kg CO2 eq. |
| Carbon footprint of the end-of-life phase [C1 to C4] | 2 kg CO2 eq. |

Use Better



Materials and Packaging

| | |
|--|--|
| Packaging made with recycled cardboard | No |
| Packaging without single use plastic | No |
| EU RoHS Directive | Compliant By Exemption |
| REACH Regulation | Reference contains Substances of Very High Concern above the threshold |
| PVC free | Yes |

Use Longer




Lifetime extension

| | |
|--------|----|
| Repair | No |
|--------|----|

Use Again




Repack and remanufacture

| | |
|---------------------------------|---|
| Recyclability potential, in % | 40 |
| End of life manual availability | End of Life Information |
| Take-back | No |
| WEEE Label |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Dimensions Drawings

Dimensions


Servo Drive Dimensions

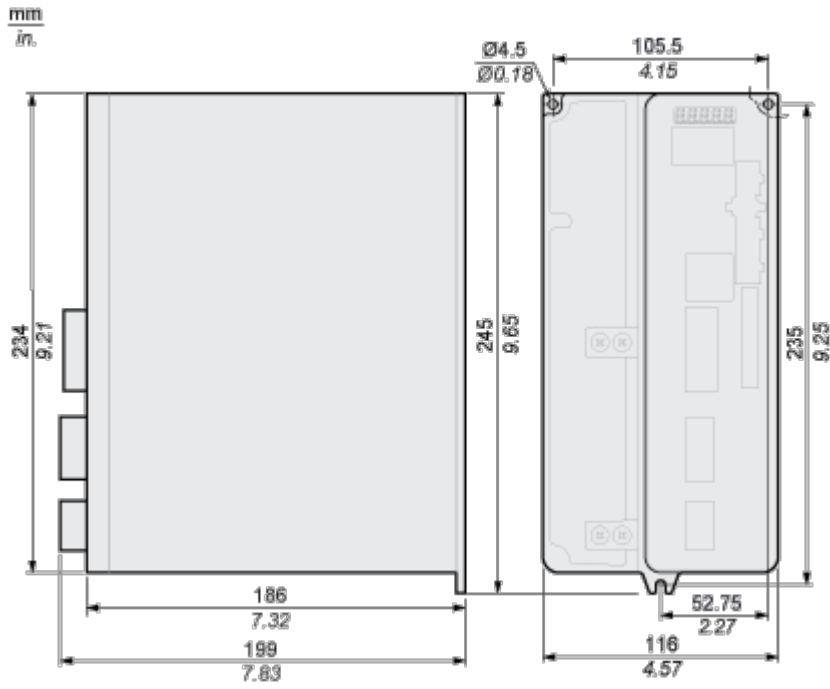

Mounting and Clearance

Mounting and Clearance

Clearance

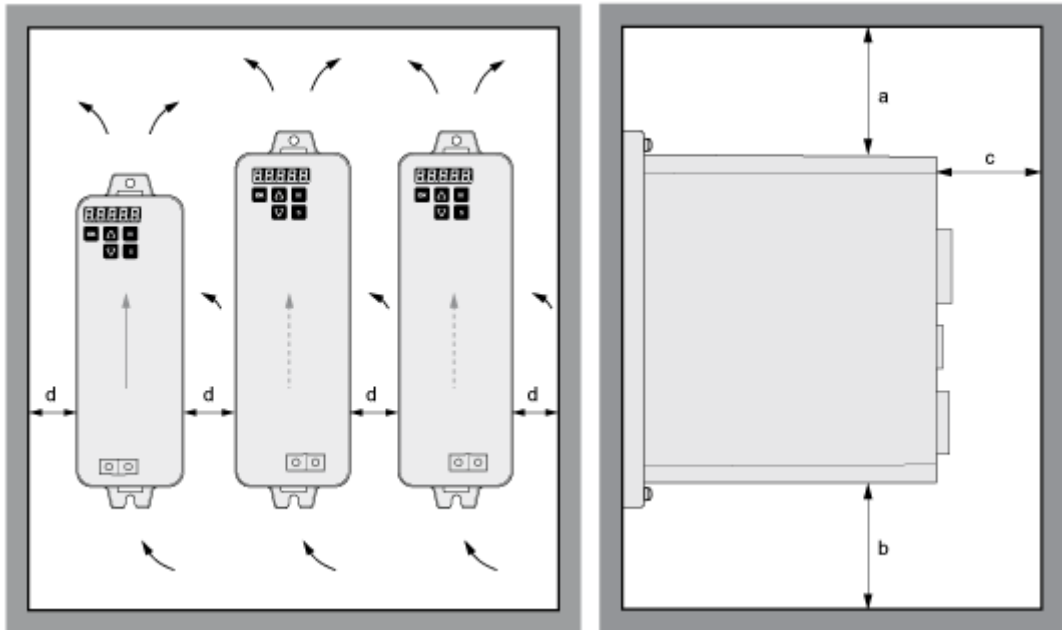

| Distance | Unit | Value |
|---|------------|----------------|
| Free space a above the device | mm (in) | ≥ 50 ≥ 1.97 |
| Free space b below the device | mm (in) | ≥ 50 ≥ 1.97 |
| Free space c in front of the device ⁽¹⁾ | mm (in) | ≥ 60 ≥ 2.36 |
| Free space d between devices | mm (in) | ≥ 15 ≥ 0.59 |