

Product datasheet

Specifications



TeSys D - star delta starter - 3 x 3P (3 NO) - 115 A - 24 V AC coil

LC3D115B7

⚠ Discontinued on: 15 Dec 2020

EAN Code: 3389110207606

⚠ Discontinued

Main

Range	TeSys
Product name	TeSys D
Product or component type	Star delta starter
Device short name	LC3D
Contactors application	Motor control
Utilisation category	AC-3
Device presentation	Pre-wired
Poles description	3 x 3P
power pole contact composition	3 x 3 NO
[Ue] rated operational voltage	Power circuit: <= 690 V AC 25...400 Hz
[Ie] rated operational current	115 A (at <60 °C) at <= 440 V AC AC-3 for power circuit
Motor power kW	110 kW at 380/400 V AC 50/60 Hz 110 kW at 415 V AC 50/60 Hz 110 kW at 440 V AC 50/60 Hz 63 kW at 220/230 V AC 50/60 Hz
Control circuit type	AC at 50/60 Hz
[Uc] control circuit voltage	24 V AC 50/60 Hz
Auxiliary contact composition	1 NC for KM2 line contactor 1 NO for KM3 delta contactor
[Uimp] rated impulse withstand voltage	8 kV conforming to IEC 60947
Overvoltage category	III
[Ui] rated insulation voltage	Power circuit: 600 V CSA certified Power circuit: 600 V UL certified Signalling circuit: 600 V CSA certified Signalling circuit: 600 V UL certified Power circuit: 1000 V conforming to IEC 60947-4-1 Signalling circuit: 1000 V conforming to IEC 60947-1
Electrical durability	0.95 Mcycles 115 A AC-3 at Ue <= 440 V
Mounting support	Plate
Standards	EN 60947-5-1 EN 60947-4-1 CSA C22.2 No 14 IEC 60947-4-1 IEC 60947-5-1 UL 508

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product certifications	CCC GOST LROS (Lloyds register of shipping) GL DNV RINA CSA BV UL
-------------------------------	---

Complementary

Connections - terminals	Power circuit: connector 1 10...120 mm ² - cable stiffness: flexible without cable end Power circuit: connector 2 10...50 mm ² - cable stiffness: flexible without cable end Power circuit: connector 1 10...120 mm ² - cable stiffness: flexible with cable end Power circuit: connector 2 10...50 mm ² - cable stiffness: flexible with cable end Power circuit: connector 1 10...120 mm ² - cable stiffness: solid without cable end Power circuit: connector 2 10...50 mm ² - cable stiffness: solid without cable end Control circuit: connector 1 1...2.5 mm ² - cable stiffness: flexible without cable end Control circuit: connector 2 1...2.5 mm ² - cable stiffness: flexible without cable end Control circuit: connector 1 1...2.5 mm ² - cable stiffness: flexible with cable end Control circuit: connector 2 1...2.5 mm ² - cable stiffness: flexible with cable end Control circuit: connector 1 1...2.5 mm ² - cable stiffness: solid without cable end Control circuit: connector 2 1...2.5 mm ² - cable stiffness: solid without cable end
Tightening torque	Power circuit: 12 N.m - on connector - with screwdriver flat Ø 6...8 mm Control circuit: 1.2 N.m - on connector - with screwdriver flat Ø 6 mm Control circuit: 1.2 N.m - on connector - with screwdriver Philips No 2
Mechanical durability	8 Mcycles
Maximum operating rate	30 cyc/h 60 °C
Starting time	30 s
Coil technology	Without built-in suppressor module
Control circuit voltage limits	Drop-out: 0.3...0.5 U _c at 50/60 Hz (at <55 °C) Operational: 0.8...1.15 U _c at 50/60 Hz (at <55 °C)
Inrush power in VA	280...350 VA 60 Hz cos phi 0.8 (at 20 °C) 280...350 VA 50 Hz cos phi 0.8 (at 20 °C)
Hold-in power consumption in VA	2...18 VA 60 Hz cos phi 0.3 (at 20 °C) 2...18 VA 50 Hz cos phi 0.3 (at 20 °C)
Heat dissipation	3...8 W at 50/60 Hz
Auxiliary contacts type	Mechanically linked conforming to IEC 60947-5-1 3 x 1 NO + 1 NC Mirror contact conforming to IEC 60947-4-1 3 x 1 NC
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA for signalling circuit
minimum switching voltage	17 V for signalling circuit
Non-overlap time	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
Width	450 mm
Height	555 mm
Depth	205 mm
Net weight	11.8 kg

Environment

Insulation resistance	> 10 MOhm for signalling circuit
IP degree of protection	IP20 front face conforming to IEC 60529
Protective treatment	TH conforming to IEC 60068-2-30
Pollution degree	3

Ambient air temperature for storage	-60...80 °C
Ambient air temperature for operation	-40...60 °C 60...70 °C with derating
Operating altitude	3000 m
Fire resistance	850 °C conforming to IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open: 2 Gn, 5...300 Hz Vibrations contactor closed: 4 Gn, 5...300 Hz Shocks contactor closed: 15 Gn for 11 ms Shocks contactor open: 6 Gn for 11 ms

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	35 cm
Package 1 Width	67 cm
Package 1 Length	77 cm
Package 1 Weight	11.8 kg

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better



Materials and Substances

EU RoHS Directive

[Compliant](#)

PVC free

Yes

Use Longer



Lifetime extension

Repair

No

Use Again



Repack and remanufacture

End of life manual availability

[End of Life Information](#)


WEEE Label



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings


Dimensions

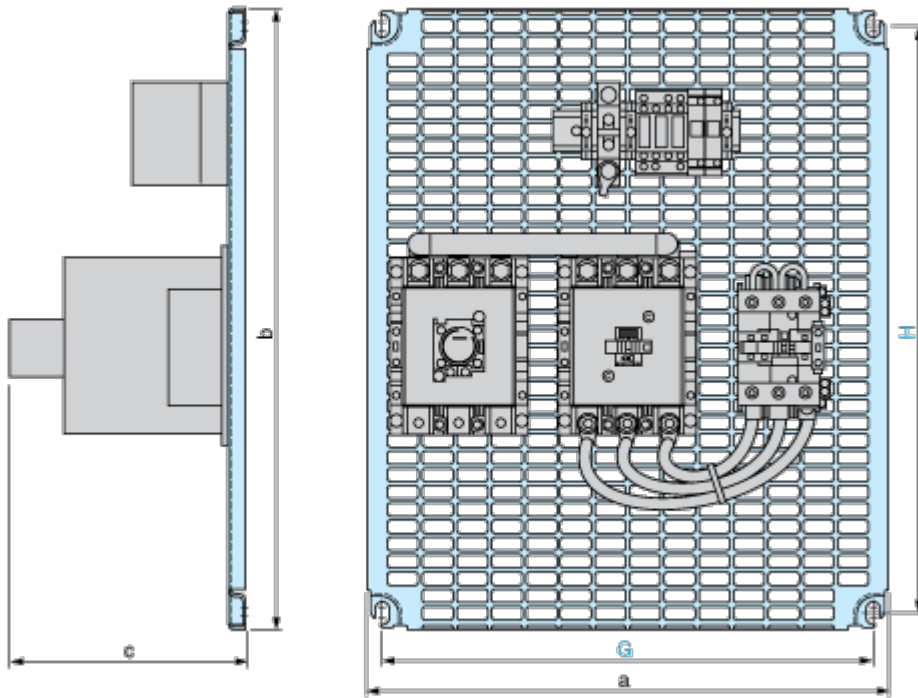

LC3 or 3 x LC1	a	b	c	G	H
LC3 D115 or 3 x LC1 D with components	450	555	205	425	525
LC3 D150 or 3 x LC1 D with components	450	555	205	425	525

Connections and Schema

Wiring

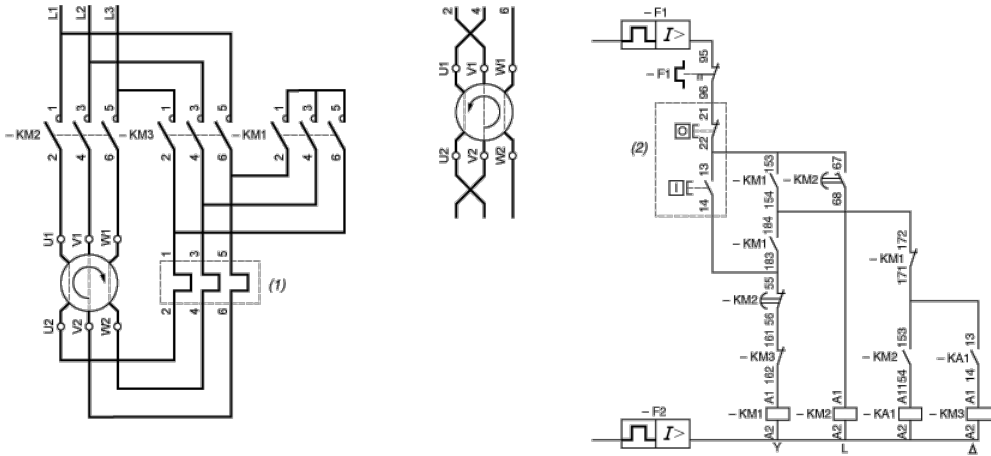

- (1) Recommended cabling for reversal of motor rotation (standard motor, viewed from shaft end).
- (2) Remote control.