


Product availability: Stock - Normally stocked in distribution facility

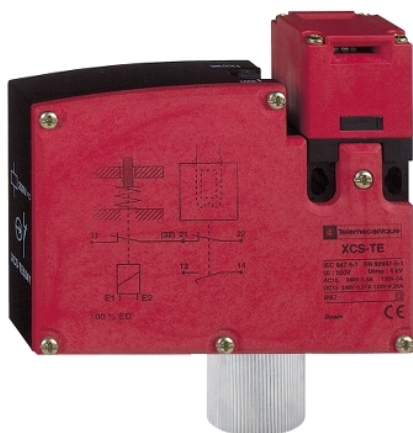

### Main

Device short name	XCSTE
Enclosure type	Dust and damp proof enclosure indoor/outdoor Corrosion resistance enclosure indoor/outdoor

### Complementary

Line Rated Current	6 A
[Us] rated supply voltage	24 V
Actuator	Key
Contact operation	Slow-break, break before make
Contacts type and composition	1 NO + 1 NC
Depth	33.02 mm (1.3 in)
Electromagnet interlocking	Locking on energisation and unlocking on de-energisation of solenoid
Enclosure material	plastic
Height	93.22 mm (3.67 in)
Locking options description	With locking of actuator, unlocking by key operated lock With interlocking, locking by solenoid
Number of poles	2
Permissible voltage	300 V AC

### Environment

Ambient air temperature for operation	-25...60 °C (-13...140 °F)
IP degree of protection	IP67
NEMA degree of protection	NEMA 4/4X/12

### Ordering and shipping details

Category	22411 - LIMIT SWITCHES,IEC,XCKJ
Discount Schedule	T
GTIN	00785901326809
Package weight(Lbs)	0.50 kg (1.1 lb(US))
Returnability	Yes
Country of origin	FR

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------