


SIMATIC S7-1500H synchronization module for optical fiber cables up to 10 km, fiber category OS1 or OS2, connector type LC

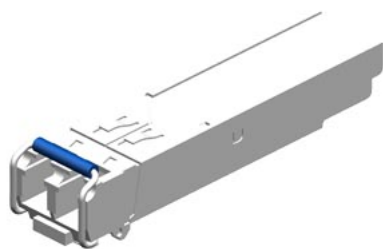

General information	
Product type designation	Synchronization module
Engineering with	
• STEP 7 TIA Portal configurable/integrated from version	STEP 7 V15.1 or higher
Power loss	
Power loss, typ.	0.83 W
Interfaces	
Optical interface	Yes
• design of optical connection	LC
• wavelength of optical interface	1 310 nm
• range (depending on optical fiber used), min.	2 m
• range (depending on optical fiber used), max.	10 km
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	40 °C
Ambient temperature during storage/transportation	
• min.	-40 °C
• max.	70 °C
Dimensions	
Width	13 mm
Height	14 mm
Depth	58 mm
Weights	
Weight, approx.	18 g
Classifications	

	Version	Classification
eClass	14	27-24-22-08
eClass	12	27-24-22-08
eClass	9.1	27-24-22-08
eClass	9	27-24-22-08
eClass	8	27-24-22-08
eClass	7.1	27-24-22-08
eClass	6	27-24-22-08
ETIM	10	EC001423

ETIM	9	EC001423
ETIM	8	EC001423
ETIM	7	EC001423
IDEA	4	3564
UNSPSC	15	32-15-17-05

Approvals / Certificates

General Product Approval	Maritime application
--------------------------	----------------------



[China RoHS](#)



last modified:

10/7/2024