


Product data sheet

Specifications

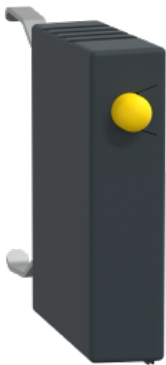

TeSys K - Suppressor module - flywheel diode - 12...24 V

LA4KC2B

Main

Range	TeSys
Device short name	LA4K
Product or component type	Suppressor module
Product compatibility	LC1 LP1

Complementary

Mounting location	Front side
Mounting mode	Clip-on
Suppressor technology	Flywheel diode
[Uc] control circuit voltage	12...24 V DC
Maximum peak voltage	2 Uc
Local signalling	LED
Quantity per set	Set of 5
Height	1.02 in (26 mm)
Width	0.24 in (6 mm)
Depth	0.87 in (22 mm)
Net weight	0.02 lb(US) (0.01 kg)

Environment

Standards	UL 60947-5-1 CSA C22.2 No 60947-5-1 EN/IEC 60947-5-1
Product certifications	UL CSA CE UKCA
IP degree of protection	IP2XIEC 60529
Protective treatment	TCIEC 60068 TCDIN 50016
Ambient air temperature for operation	-13...122 °F (-25...50 °C)
Ambient air temperature for storage	-58...176 °F (-50...80 °C)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.65 in (4.2 cm)
Package 1 Width	2.05 in (5.2 cm)
Package 1 Length	1.10 in (2.8 cm)
Package 1 Weight	0.14 oz (4.0 g)
Unit Type of Package 2	S01
Number of Units in Package 2	420
Package 2 Height	5.91 in (15 cm)
Package 2 Width	5.91 in (15 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	3.75 lb(US) (1.7 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	13440
Package 3 Height	29.53 in (75 cm)
Package 3 Width	15.75 in (40 cm)
Package 3 Length	31.50 in (80 cm)
Package 3 Weight	173.64 lb(US) (78.76 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)