








Contactora AC 36 V 50 HZ AC3 15 kW 400 V 3-pole, size S2 screw terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT5
General technical data	
size of contactor	S2
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
• at AC in hot operating state per pole	1.8 W
• without load current share typical	4.07 W
type of calculation of power loss current-dependent	quadratic
insulation voltage rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	10 g / 5 ms, 5 g / 10 ms
shock resistance with sine pulse	
• at AC	15 g / 5 ms, 8 g / 10 ms
mechanical service life (operating cycles)	
• of contactor typical	10 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
Substance Prohibition (day/month/year)	03/01/2017
SVHC substance name	Lead CAS-No. 7439-92-1
Net Weight	0.85 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operating voltage	
• at AC-3 rated value maximum	690 V
• at AC-3e rated value maximum	690 V
operational current	
• at AC-1 up to 690 V	




— at ambient temperature 40 °C rated value	50 A
— at ambient temperature 60 °C rated value	45 A
● at AC-3	
— at 400 V rated value	32 A
— at 690 V rated value	20 A
● at AC-3e	
— at 400 V rated value	32 A
— at 690 V rated value	20 A
connectable conductor cross-section in main circuit at AC-1	
● at 60 °C minimum permissible	10 mm ²
● at 40 °C minimum permissible	16 mm ²
operational current for approx. 200000 operating cycles at AC-4	
● at 400 V rated value	15.6 A
● at 690 V rated value	11 A
operating power	
● at AC-1	
— at 230 V at 60 °C rated value	18 kW
— at 400 V at 60 °C rated value	31 kW
— at 690 V at 60 °C rated value	54 kW
● at AC-3	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	18.5 kW
● at AC-3e	
— at 230 V rated value	7.5 kW
— at 400 V rated value	15 kW
— at 500 V rated value	18.5 kW
— at 690 V rated value	18.5 kW
operating power for approx. 200000 operating cycles at AC-4	
● at 400 V rated value	8.2 kW
● at 690 V rated value	10 kW
no-load switching frequency	
● at AC	5 000 1/h
operating frequency	
● at AC-1 maximum	1 200 1/h
● at AC-3 maximum	1 000 1/h
● at AC-3e maximum	1 000 1/h
● at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
● at 50 Hz rated value	36 V
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 ... 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	104 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.73
apparent holding power of magnet coil at AC	
● at 50 Hz	9.7 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.42
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	0

number of NO contacts for auxiliary contacts instantaneous contact	0	
operational current at AC-12 maximum	10 A	
operational current at AC-15		
• at 230 V rated value	6 A	
• at 400 V rated value	3 A	
operational current at DC-12		
• at 110 V rated value	3 A	
• at 220 V rated value	1 A	
operational current at DC-13		
• at 24 V rated value	6 A	
• at 110 V rated value	1 A	
• at 220 V rated value	0.3 A	
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)	
UL/CSA ratings		
yielded mechanical performance [hp] for 3-phase AC motor at 460/480 V rated value	25 hp	
Short-circuit protection		
design of the fuse link		
• for short-circuit protection of the main circuit		
— with type of coordination 1 required	fuse gL/gG: 125 A	
— with type of coordination 2 required	fuse gL/gG: 63 A	
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A	
Installation/ mounting/ dimensions		
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface	
fastening method side-by-side mounting	Yes	
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022	
height	112 mm	
width	55 mm	
depth	115 mm	
Connections/ Terminals		
type of electrical connection		
• for main current circuit	screw-type terminals	
• for auxiliary and control circuit	screw-type terminals	
type of connectable conductor cross-sections for main contacts		
• solid or stranded	2x (0.75 ... 16 mm ²)	
• finely stranded with core end processing	2x (0.75 ... 16 mm ²)	
• finely stranded without core end processing	2x (0.75 ... 16 mm ²)	
type of connectable conductor cross-sections		
• for auxiliary contacts		
— finely stranded with core end processing	2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²)	
• for AWG cables for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14), 1x 12	
Safety related data		
product function mirror contact according to IEC 60947-4-1	Yes	
Electrical Safety		
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	
Approvals Certificates		
General Product Approval	EMV	
 Confirmation    		
Maritime application	other	Environment



Further information

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/products?pnid=16027&lc=en-CN>

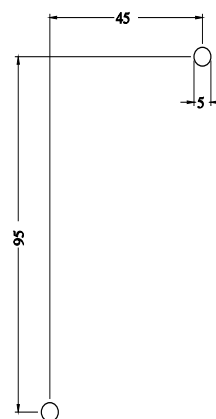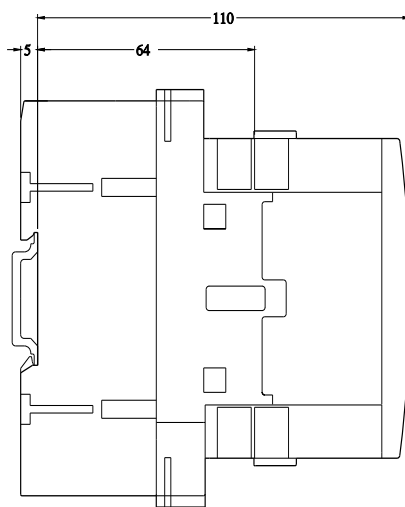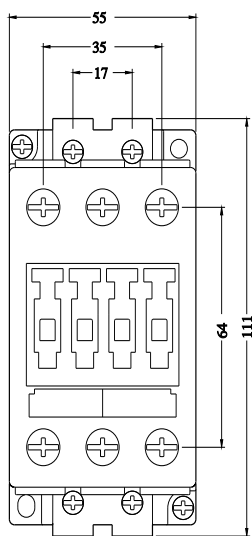



last modified:

4/4/2026 