



Contactor 36 V AC/DC AC3 132 kW 400 V AC (50...60 Hz) / DC operation auxiliary contacts 2 NO + 2 NC, 3-pole, size S10 bar connections conventional operating mechan. screw terminal

<b>product brand name</b>	SIRIUS
<b>product designation</b>	Power contactor
<b>product type designation</b>	3RT5
<b>General technical data</b>	
<b>power loss [W] for rated value of the current</b>	
• at AC in hot operating state per pole	18 W
• without load current share typical	7.4 W
<b>type of calculation of power loss current-dependent</b>	quadratic
<b>Substance Prohibitance (day/month/year)</b>	03/01/2017
<b>SVHC substance name</b>	Lead CAS-No. 7439-92-1
<b>Net Weight</b>	6.55 kg
<b>Main circuit</b>	
<b>operating voltage</b>	
• at AC-3 rated value maximum	1 000 V
• at AC-3e rated value maximum	1 000 V
<b>operational current</b>	
• at AC-3	
— at 400 V rated value	265 A
— at 690 V rated value	265 A
• at AC-3e	
— at 400 V rated value	265 A
— at 690 V rated value	265 A
— at 1000 V rated value	95 A
<b>operating power</b>	
• at AC-3	
— at 230 V rated value	75 kW
— at 400 V rated value	132 kW
— at 500 V rated value	160 kW
— at 690 V rated value	250 kW
• at AC-3e	
— at 230 V rated value	75 kW
— at 400 V rated value	132 kW
— at 500 V rated value	160 kW
— at 1000 V rated value	132 kW
<b>operating frequency</b>	
• at AC-3e maximum	700 1/h
<b>UL/CSA ratings</b>	
yielded mechanical performance [hp] for 3-phase AC motor at 460/480 V rated value	200 hp

Electrical Safety	
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover
Approvals Certificates	
General Product Approval	EMV



[Confirmation](#)



Maritime application	other	Environment
----------------------	-------	-------------

[CCS \(China Classification Society\)](#)


[Confirmation](#)



[Environmental Confirmations](#)

**Further information**

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/products?pnid=16027&lc=en-CN>

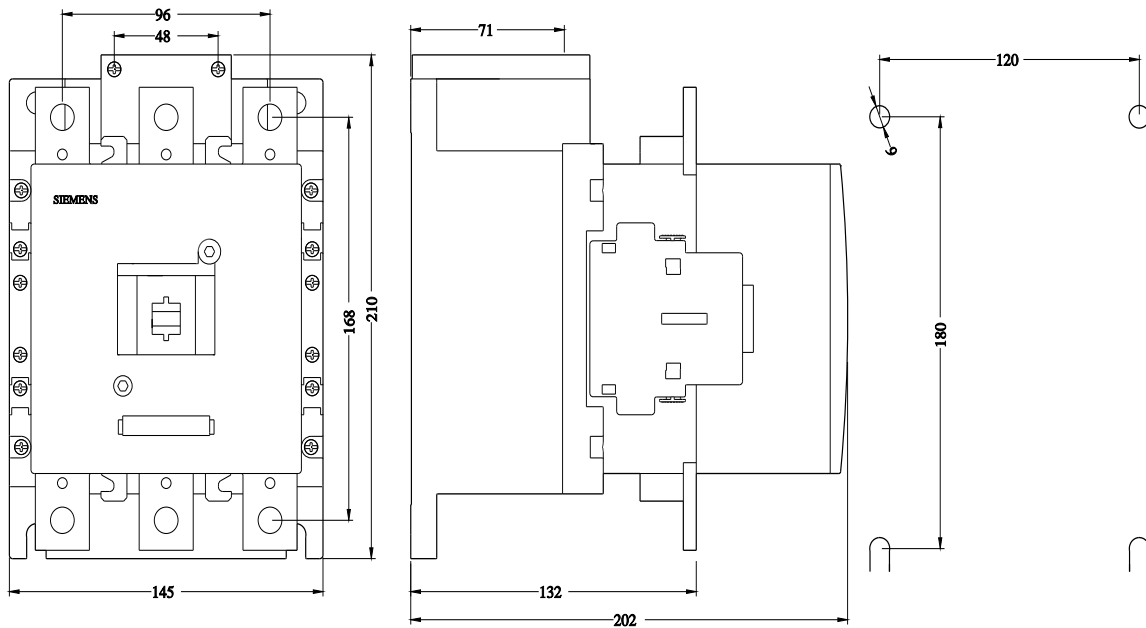

last modified:

4/12/2026