


Photo-electrics: XU Range

		Sensing distance		Compact 50x50 mm		Compact 92x71 mm									
	Diffuse	1 m	DC3	PNP	cable	XUK5APANL2	2.1 m	DC3	PNP	terminals	XUX5APANL2				
					connector 4P	XUK5APANM12				connector 4P	XUX5APANM12				
				NPN	cable	XUK5ANANL2				terminals	XUX5ANANL2				
					connector 4P	XUK5ANANM12				connector 4P	XUX5ANANM12				
				AC/DC	Relay	cable				XUK5ARCNL2	terminals	XUX5ARCNT16			
Output function		NO		A		A		NO		A		A			
		NC		B		B				NC		B		B	
	Polarized Reflex	5 m	DC3	PNP	cable	XUK9APANL2	11 m	DC3	PNP	terminals	XUX9APANL2				
					connector 4P	XUK9APANM12				connector 4P	XUX9APANM12				
				NPN	cable	XUK9ANANL2				terminals	XUX9ANANL2				
					connector 4P	XUK9ANANM12				connector 4P	XUX9ANANM12				
				AC/DC	Relay	cable				XUK9ARCNL2	terminals	XUX9ARCNT16			
Accessory: Reflector				XUZC50						XUZC50					
	Reflex	7 m	DC3	PNP	cable	XUK1APANL2	14 m	DC3	PNP	terminals	XUX1APANL2				
					connector 4P	XUK1APANM12				connector 4P	XUX1APANM12				
				NPN	cable	XUK1ANANL2				terminals	XUX1ANANL2				
					connector 4P	XUK1ANANM12				connector 4P	XUX1ANANM12				
				AC/DC	Relay	cable				XUK1ARCNL2	terminals	XUX1ARCNT16			
Accessory: Reflector				XUZC50						XUZC50					
	Thru-beam	30 m	DC3	PNP	cable	XUK2APANL2R	40 m	DC3	PNP	terminals	XUX2APANL2R				
					connector 4P	XUK2APANM12R				connector 4P	XUX2APANM12R				
				NPN	cable	XUK2ANANL2R				terminals	XUX2ANANL2R				
					connector 4P	XUK2ANANM12R				connector 4P	XUX2ANANM12R				
				Accessory: Transmitter						XUK2AKSNL2T					
				XUK2AKSNM12T						XUX0AKSAM12T					
				XUK2ARCNL2R						XUX2ARCNT16R					
				XUK2ARCNL2T						XUX0ARCNT16T					

Multimode		DC3 PNP/NPN		cable		XUK0AKSAL2		DC3 PNP/NPN		terminals		XUX0AKSAT16	
	Background suppression (BGS)	Diffuse (D)	AC/DC	Relay	cable		XUK0AKSAL2	AC/DC	Relay	terminals		XUX0AKSAT16	
					connector 4P		XUK0AKSAM12			connector 4P		XUX0AKSAM12	
					cable		XUK0ARCTL2			terminals		XUX0ARCTT16	
Background Suppression: 0.28 m		Diffuse: 0.8 m						Background Suppression: 1.3 m		Diffuse: 2 m			
Polarized reflex: 4 m		Thru-beam: 30 m						Polarized reflex: 11 m		Thru-beam: 40 m			
Accessory: Transmitter		DC		cable		XUK0AKSAL2T		DC		terminals		XUX0AKSAT16T	
				connector 4P		XUK0AKSAM12T				connector 4P		XUX0AKSAM12T	
		AC/DC		cable		XUK0ARCTL2T		AC/DC		terminals		XUX0ARCTT16T	

Other fixings		
Single bracket		
	standard	with ball joint
XUB	XUZA118 (stainless steel)	XUZA218 (plastic)
XUM	XUZAM02	-
XUK	XUZA51	-
XUX	XUZX2000	-

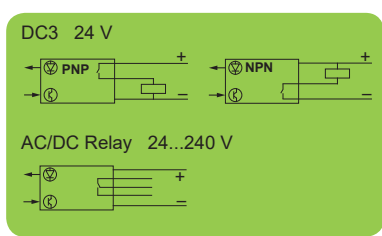

PUR pre wired connectors (female) (1)					Connectors (female)					
M12		straight	elbowed	elbowed PNP LED	M12		straight	elbowed		
4 pin	2 m	XZCP1141L2	XZCP1241L2	XZCP1340L2	4 pin (1)		XZCC12FDM40B	XZCC12FCM40B		
	5 m	XZCP1141L5	XZCP1241L5	XZCP1340L5			4 pin (2)		XZCC12FDP40B	XZCC12FCP40B
	10 m	XZCP1141L10	XZCP1241L10	XZCP1340L10						

(1) For a PVC cable, add the letter V after the P. Example: XZCPxxxxx become XZCPVxxxxx