

Product data sheet

Specifications



servo motor BCH, w oil seal, w key,
20-bit encoder, w brake-straight con

BCH1303N32F1C

- ⚠ Discontinued on: 31 December 2018
- ⚠ To be end-of-service on: 31 December 2023

⚠ Discontinued - Service only

Main

Range compatibility	Lexium 23 Plus
Product or component type	Servo motor
Device short name	BCH

Complementary

Maximum mechanical speed	3000 rpm
[Us] rated supply voltage	220 V
Network number of phases	Single phase
Continuous stall current	8.3 A
Continuous power	1.5 kW
Shaft end	Keyed
Second shaft	Without second shaft end
Shaft diameter	22 mm
Shaft length	47 mm
Key width	8 mm
Feedback type	20 bits incremental encoder
Holding brake	With
Holding torque	10 N.m
Mounting support	Asian standard flange
Motor flange size	130 mm
Torque constant	0.87 N.m/A
Back emf constant	31.8 V/krpm at 20 °C
Rotor inertia	11.9 kg.cm²
Stator resistance	0.52 Ohm at 20 °C
Stator inductance	8.02 mH at 20 °C
Stator electrical time constant	15.31 ms at 20 °C
Maximum radial force Fr	490 N
Maximum axial force Fa	98 N

Brake pull-in power	19 W
Type of cooling	Natural convection
Length	202 mm
Number of motor stacks	3
Centring collar diameter	110 mm
Centring collar depth	6 mm
Number of mounting holes	4
Mounting holes diameter	9 mm
Circle diameter of the mounting holes	145 mm
Distance shaft shoulder-flange	47 mm
Net weight	8.9 kg

Environment

IP degree of protection	IP65
Ambient air temperature for operation	0...40 °C


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	9.5 kg
Package 1 Height	23.8 cm
Package 1 width	29.2 cm
Package 1 Length	36.6 cm

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

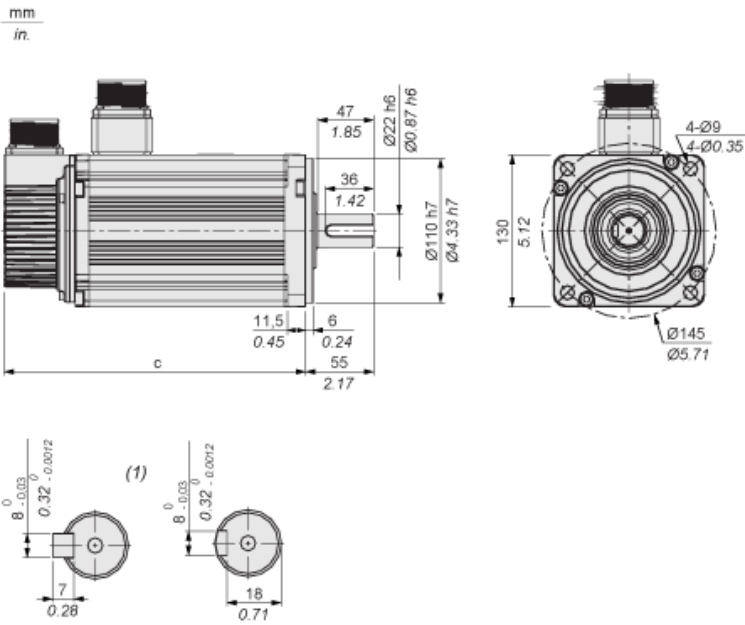

(1) Shaft end, keyed slot (optional)

Dimensions in mm


c (without holding brake)	c (with holding brake)
167.5	202

Dimensions in in.

c (without holding brake)	c (with holding brake)
6.59	7.95

Torque/Speed Curves with 220 V Single Phase Supply Voltage

Servo Motor with LXM23•U15M3X Servo Drive

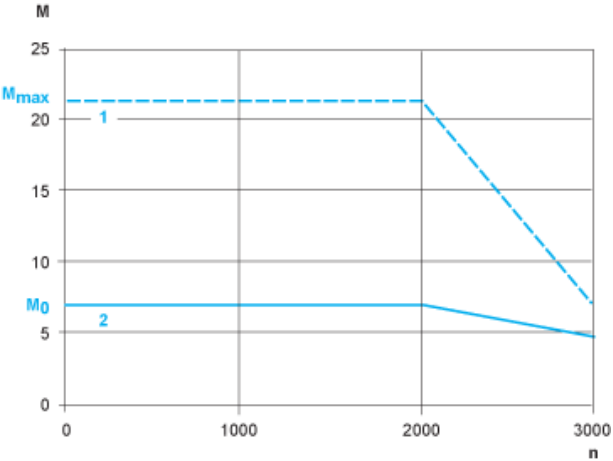

- M :

n :

1 :

2 :
- Torque in Nm

Speed in rpm

Peak torque

Continuous torque

Recommended replacement(s)

BCH1303N32F1C is replaced by:

1x		servo motor BCH, 130mm, 1500W, w oil seal, w key, brake, straight con BCH2MM1523CF6C
----	---	---