

AS-i compact module K60 digital 2 DI/2 DQ, IP67 2 x 1 input, max. 200 mA 2 x 1 output, 2 A, 24 V DC 2 x M12 standard socket Y assignment Mounting plate 3RK1901-0CA00 must be ordered separately

### Mechanical data

shock resistance 15 g / 11 ms

### Certificates/ approvals

General Product Approval

EMV



Test Certificates	Maritime application	other	Environment
-------------------	----------------------	-------	-------------

[Special Test Certificate](#)



[Miscellaneous](#)

[Confirmation](#)



[Environmental Confirmations](#)

### Industrial Communication



### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1400-1BQ00-0AA3>

Cax online generator



<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1400-1BQ00-0AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1400-1BQ00-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RK1400-1BQ00-0AA3&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1400-1BQ00-0AA3&lang=en)

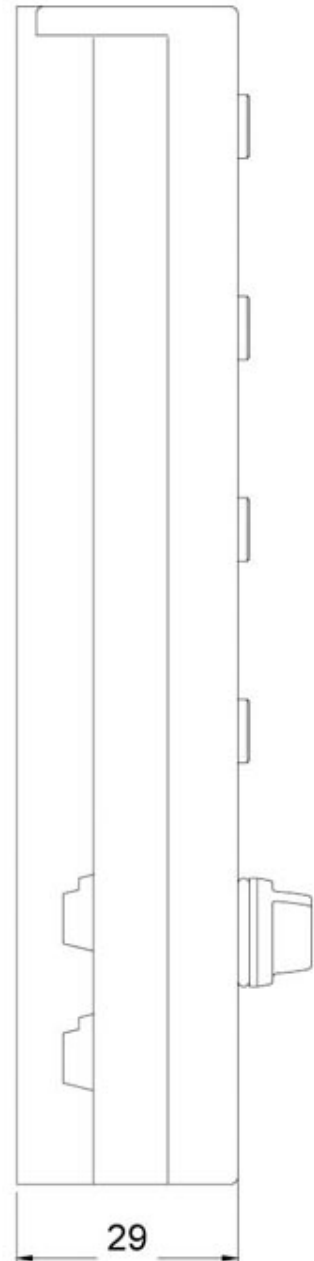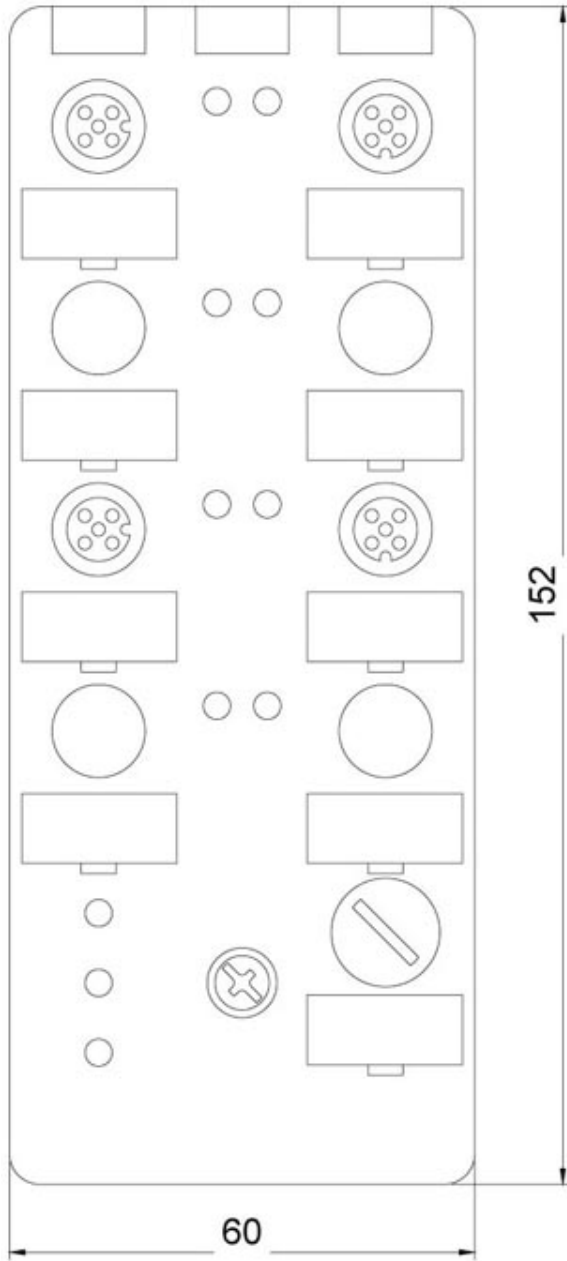

last modified:

4/4/2026 