













Circuit breaker 0.63 A A-release 0.45...0.63 A, N-release 8.2 A, for motor protection, class 10, screw connection, standard switching capacity, w. transverse AUX. switch 1 NO + 1 NC

<b>product brand name</b>	SIRIUS
<b>product designation</b>	Circuit breaker
<b>design of the product</b>	for motor protection
<b>product type designation</b>	3RV6
<b>General technical data</b>	
<b>size of the circuit-breaker</b>	S00
<b>power loss [W] total typical</b>	5 W
power loss [W] for rated value of the current at AC in hot operating state per pole	1.8 W
<b>type of calculation of power loss current-dependent</b>	quadratic
insulation voltage with degree of pollution 3 at AC rated value	690 V
<b>surge voltage resistance rated value</b>	6 kV
<b>shock resistance according to IEC 60068-2-27</b>	25 g / 11 ms
<b>Substance Prohibitance (day/month/year)</b>	05/01/2012
<b>SVHC substance name</b>	Lead CAS-No. 7439-92-1
<b>Net Weight</b>	0.295 g
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
• during operation	-20 ... +60 °C
• during transport	-50 ... +80 °C
relative humidity during operation	10 ... 95 %
<b>Main circuit</b>	
<b>number of poles for main current circuit</b>	3
<b>adjustable current response value current of the current-dependent overload release</b>	0.45 ... 0.63 A
<b>operating voltage</b>	
• rated value	690 V
• at AC-3 rated value maximum	690 V
<b>operating frequency rated value</b>	50 ... 60 Hz
<b>operational current rated value</b>	0.63 A
operational current at AC-3 at 400 V rated value	0.63 A
operating frequency at AC-3 maximum	15 1/h
<b>Auxiliary circuit</b>	
<b>design of the auxiliary switch</b>	transverse
<b>Protective and monitoring functions</b>	
<b>trip class</b>	CLASS 10
<b>design of the overload release</b>	thermal
maximum short-circuit current breaking capacity (I <sub>cu</sub> ) at AC at 400 V rated value	100 kA

operating short-circuit current breaking capacity (Ics) at AC at 400 V rated value	100 kA				
response value current of instantaneous short-circuit trip unit	8.2 A				
<b>Short-circuit protection</b>					
product function short circuit protection	Yes				
design of the short-circuit trip	magnetic				
<b>Installation/ mounting/ dimensions</b>					
mounting position	any				
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715				
height	97 mm				
width	45 mm				
depth	97 mm				
required spacing for grounded parts					
<ul style="list-style-type: none"> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> </ul>	<ul style="list-style-type: none"> <li>0 mm</li> <li>0 mm</li> <li>50 mm</li> <li>30 mm</li> <li>50 mm</li> </ul>				
<b>Connections/ Terminals</b>					
type of electrical connection					
<ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> </ul>	<ul style="list-style-type: none"> <li>screw-type terminals</li> <li>screw-type terminals</li> </ul>				
arrangement of electrical connectors for main current circuit	Top and bottom				
type of connectable conductor cross-sections for main contacts					
<ul style="list-style-type: none"> <li>solid or stranded</li> <li>finely stranded with core end processing</li> </ul>	<ul style="list-style-type: none"> <li>2x (0,75 ... 2,5 mm<sup>2</sup>), 2x 4 mm<sup>2</sup></li> <li>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</li> </ul>				
type of connectable conductor cross-sections					
<ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>for AWG cables for auxiliary contacts</li> </ul>	<ul style="list-style-type: none"> <li>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</li> <li>2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)</li> <li>2x (20 ... 16), 2x (18 ... 14)</li> </ul>				
tightening torque					
<ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary contacts with screw-type terminals</li> </ul>	<ul style="list-style-type: none"> <li>0.8 ... 1.2 N·m</li> <li>0.8 ... 1.2 N·m</li> </ul>				
<b>Electrical Safety</b>					
protection class IP on the front according to IEC 60529	IP20				
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front				
<b>Approvals Certificates</b>					
<b>General Product Approval</b>	<b>Test Certificates</b>				
 <a href="#">Confirmation</a>	   <a href="#">Type Test Certificates/Test Report</a>				
	<a href="#">CCS (China Classification Society)</a>	<a href="#">Miscellaneous</a>	<a href="#">Confirmation</a>		<a href="#">Environmental Confirmations</a>
<b>Maritime application</b>		<b>other</b>	<b>Environment</b>		
<b>Further information</b>					
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)					
<a href="https://support.industry.siemens.com/cs/products?pnid=16027&amp;lc=en-CN">https://support.industry.siemens.com/cs/products?pnid=16027&amp;lc=en-CN</a>					

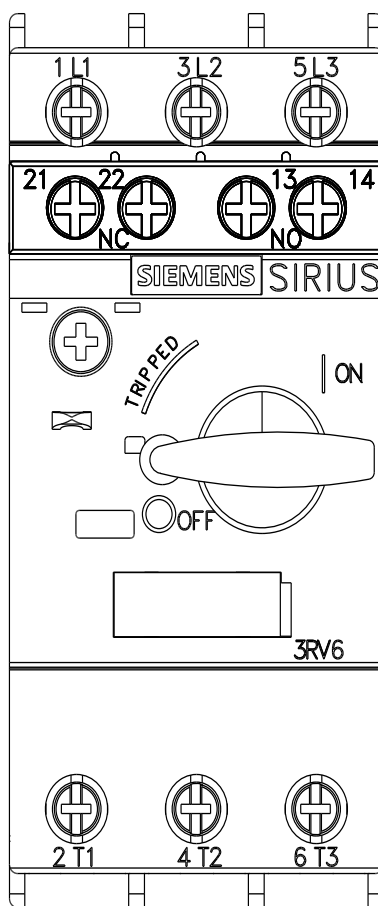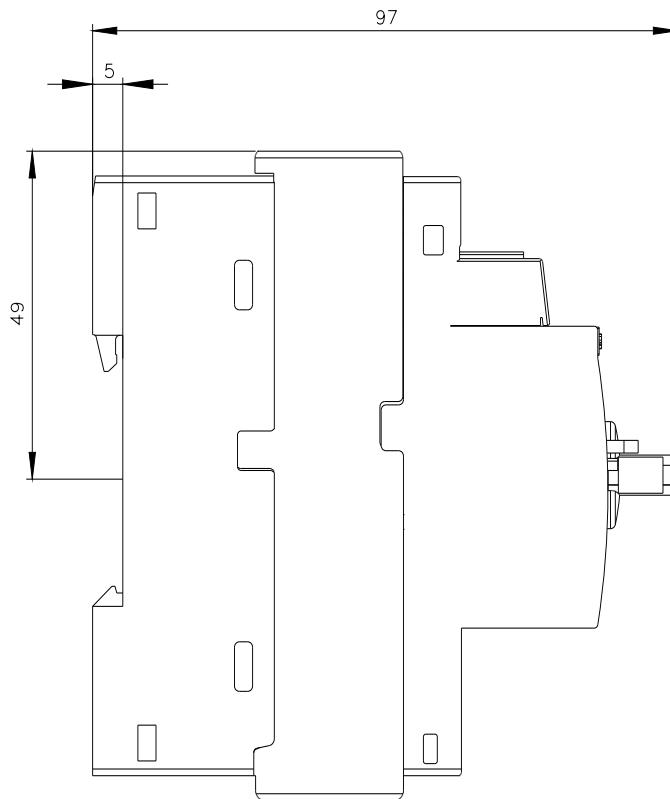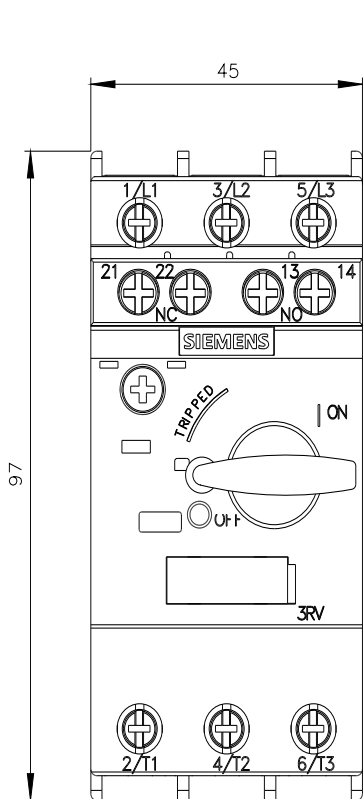

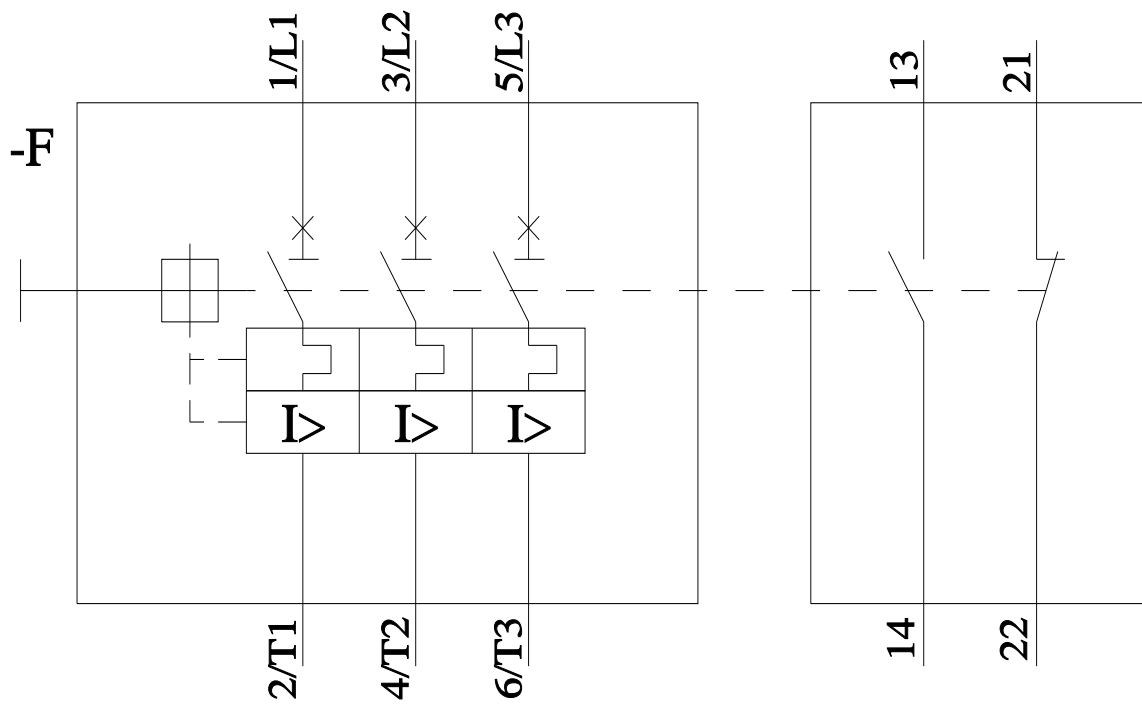

last modified:

5/16/2026 