

Miniature circuit-breaker 220 V DC DC 10 kA 1-pole C 3

Model			
product brand name	SENTRON		
product designation	Miniature circuit breaker		
General technical data			
number of poles	1		
design of pole	1P		
mechanical service life (operating cycles) typical	8 500		
Voltage			
type of voltage of the operating voltage	DC		
type of voltage	Use only in alternating current or direct current circuits. Mixed use is not permitted.		
Mechanical Design			
height	90 mm		
width	18 mm		
depth	76 mm		
installation depth	70 mm		
number of modular width units	1		
Net Weight	120 kg		
Approvals Certificates			
Environment	General Product Approval	Test Certificates	other

[Environmental Confirmations](#)

[Environmental Confirmations](#)



[Confirmation](#)

[Miscellaneous](#)

[Confirmation](#)

other

Dangerous goods



[Transport Information](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL5103-7RC>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SL5103-7RC>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SL5103-7RC](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL5103-7RC)

CAX-Online-Generator


<https://www.siemens.com/cax>

Tender specifications

<https://www.siemens.com/specifications>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

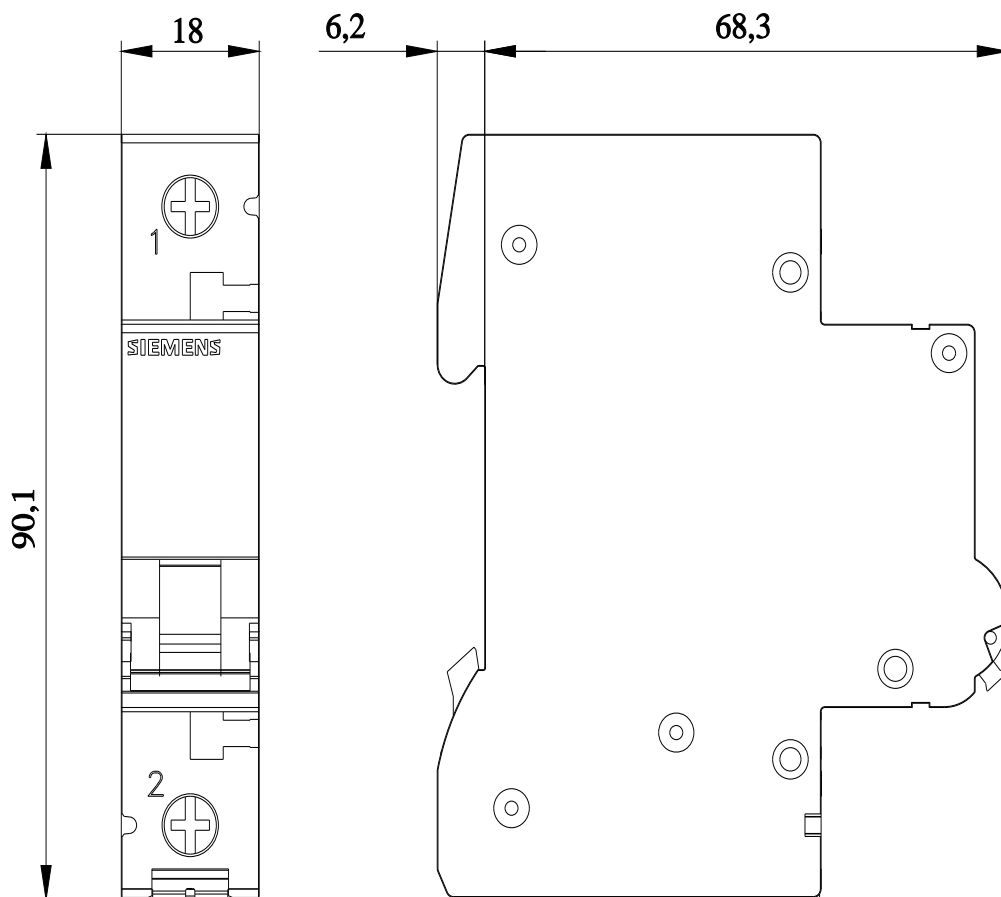

last modified:

10/10/2025 

