

Product data sheet

Specifications



Modular box PC, Harmony iPC, HMIBM Performance DC Base unit 16 GB 4 slots

HMIBMP0I74DE00A

⚠ **Discontinued on:** May 11, 2022

⚠ **To be end-of-service on:** Mar 31, 2026

⚠ **Discontinued**

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Harmony iPC
Device short name	Modular BOX PC Performance
Product or Component Type	Modular box PC
Range Compatibility	IDisplay Modular Display HMIDM
Accessory / separate part destination	PC panel HMIDM modular display
Chipset type	Intel QM87
Software package	Node-RED and system nodes restore IIoT Wiring Operating System Restore McAfee white listing installer cyber security license not included EcoStruxure secure connect advisor annual subscription cyber security license not included EcoStruxure Operator Terminal Expert run time HMI license not included EcoStruxure machine SCADA expert run time HMI/SCADA on configured offer only EcoStruxure augmented operator advisor server augmented operator license not included

Complementary

Mounting Location	Wall mounting Flat mounting Book mounting
Memory description	512 KB MRAM internal not expandable) 16 GB RAM DDR3 internal
Free slots	2 Internal SATA HDD/SSD with slide-in HMIYMADSDD1 to mount hot swap RAID with Intel Rapid Storage Technology 1 CFast 1 mSATA
Number of slots available for expansion	2 mini PCIe 1 PCI express 4x 1 PCI express 1x
Display resolution	3200 x 2000 pixels at 60 Hz
Watchdog timer	1...255 ms
Electrical connection	Screw connector, connector type: pin, 1 way, circuit application: ground - location: bottom Connector, connector type: SMA, 3 ways - location: top
[Us] rated supply voltage	24 V DC power supply 100...240 V AC power supply
Supply voltage limits	18...36 V
Control type	ON/OFF button

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Impregnation material	Conformal coated
Main type	Performance
Number of slots	1 slot(s) for PCI express 4x 2 slot(s) for mini PCI Express full-size 1 slot(s) for PCI express 1x
Type of cooling	Fanless Fan required to mount PCI/PCle cards above 3 W
Inrush current	8.9 A
Width	10 in (254 mm)
Height	8.1 in (207 mm)
Net Weight	8.6 lb(US) (3.9 kg)

Environment

Standards	Class A group 1 EN 55011 EN 61000-6-4 EN 61131-2 FCC part 15 UL 61010
Quality labels	CE
Directives	2004/108/EC - electromagnetic compatibility 2006/95/EC - low voltage directive
Product certifications	CE CULus CULus CSA 22-2 No 142 CULus HazLoc Class I Division 2 ANSI/ISA 12-12-01 CULus HazLoc Class I Division 2 CSA 22-2 No 213 ATEX CCC RCM Marine GL Bridge EAC IEC Ex hazardous locations 3GD zone 2/22
Operating altitude	6561.68 ft (2000 m) IEC 60664-1
Ambient air temperature for operation	32...131 °F (0...55 °C) by default) EN/IEC 60068-2-2 32...122 °F (0...50 °C) flat mounting 32...113 °F (0...45 °C)PCI/PCle HMIDM modular display with HDD 32...104 °F (0...40 °C) flat mountingHDD 32...104 °F (0...40 °C) flat mountingmini PCle 32...104 °F (0...40 °C) flat mountingPCI/PCle 32...113 °F (0...45 °C) 2mini PCle HMIDM modular display

Ordering and shipping details

Category	US10MC322575
Discount Schedule	0MC3
GTIN	3606480853654
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.06 in (10.3 cm)
Package 1 Width	8.1 in (20.7 cm)
Package 1 Length	10.0 in (25.4 cm)

Package weight(Lbs)	8.6 lb(US) (3.9 kg)
Unit Type of Package 2	CAR
Number of Units in Package 2	1
Package 2 Height	17.7 in (45.0 cm)
Package 2 Width	9.6 in (24.5 cm)
Package 2 Length	16.9 in (43.0 cm)
Package 2 Weight	13.007 lb(US) (5.9 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	2 041 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	286 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.4 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	1 749 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	5 kg CO2 eq.

Use Better



Materials and Substances

F-gas usage performance	K izolaci a zhášení je využíváno pouze vzduchové a vakuové médium; bez obsahu F-plynů včetně SF6.
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	3fe7d895-f8a3-452a-ad75-1d17e7e6e6eb
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Product contains halogen above thresholds
PVC free	No
Silicon free	No

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	48
-------------------------------	----

Circularity Profile	End of Life Information
Removable battery	User replaceable
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Dimensions

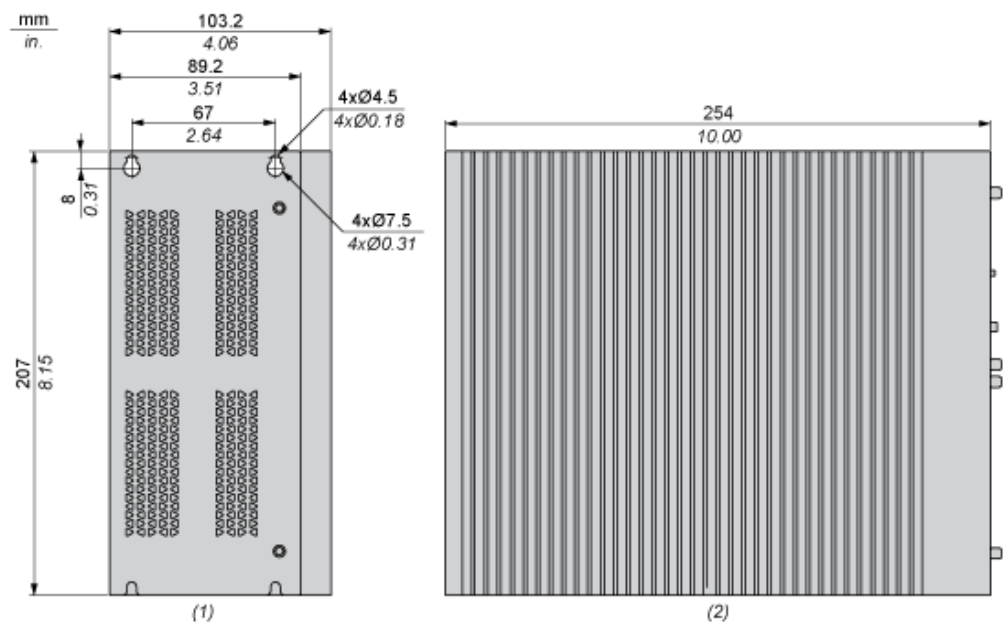

- (1) Rear view
- (2) Left view

Mounting and Clearance

Spacing Requirements

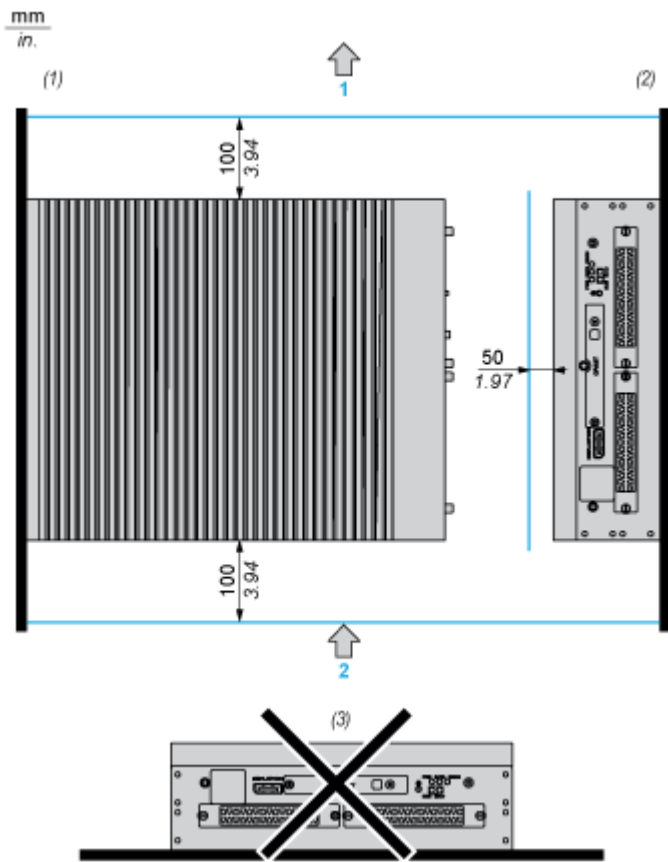

- 1 : Air out
- 2 : Air in
- (1) Book mounting : Vertical mounting with rear fixing
- (2) Wall mounting : Vertical mounting with side fixing
- (3) Horizontal mounting