

Product datasheet

Specifications



Controller, Modicon M171/M172/ M173, optimized blind, 22 IO, 2 RS485

TM173OBM22R

Main

Range of product	Modicon M171/M172/M173
Product or component type	Programmable controllers
Product specific application	HVAC and pumping solution
Variant	Programmable
Total inputs/outputs	22
Discrete input number	6
Discrete output number	3 for relay outputs SPST with same common 2 for relay outputs SPST with independent common
Discrete output current	3 A for relay SPST
Analogue input number	6 configurable by pair 1 configurable
Analogue output number	1 voltage/current, range: 0...10 V or 4...20 mA 3 voltage, range: 0...10 V or PWM (10Hz...2 kHz)

Complementary

Number of port	1 CAN port - screw terminal block 1 USB type C 2 RS485 - screw terminal block (Modbus serial link) 1 display port - TTL connector 1 communication module port
Input/output number	6 digital input(s) 5 digital output(s) 7 analog input(s) 4 analog output(s)
Discrete input logic	Sink or source (positive/negative)
Contacts usage	Volt-free contacts
Discrete input voltage	24 V AC/DC
Discrete input current	2.5 mA
Input impedance	20 kOhm
Analogue input type	NTC 103AT-2 Beta 3435 temperature probe - 50...100 °C - resolution: 0.1 °C at 10 kOhm Pt 1000 temperature probe - 50...400 °C - resolution: 0.1 °C at 2 kOhm voltage 0...10 V - resolution: 0.001 V at > 10 kOhm voltage 0...5 V - resolution: 0.001 V at 110 kOhm current 4...20 mA - resolution: 13 bits at 100 Ohm direct input at > 10 kOhm

Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Measurement accuracy	NTC NK103 Beta 3977 - 40...+110 °C +/- 1 °C NTC NK103 Beta 3977 110...137 °C +/- 1.9 °C NTC 103AT-2 Beta 3435 - 50...110 °C +/- 1 °C PTC - 55...155 °C +/- 1.1 °C Pt 1000 - 100...-50 °C +/- 5 °C Pt 1000 - 50...100 °C +/- 1 °C Pt 1000 100...400 °C +/- 5 °C 0...20 mA 0...4 mA +/- 2 % of full scale +/- 1 digit 0...20 mA 4...20 mA +/- 1 % of full scale +/- 1 digit 4...20 mA +/- 1 % of full scale +/- 1 digit 0...10 V +/- 1 % of full scale +/- 1 digit 0...5 V +/- 1 % of full scale +/- 1 digit HOhm 0...1500 hOhm +/- 8.5 hOhm DaOhm 0...300 daOhm +/- 2.5 daOhm
Sensor power supply	5 V DC at 50 mA supplied by the controller 24 V DC at 125 mA supplied by the controller
[Us] rated supply voltage	24 V +/- 10 % AC 20...38 V DC
Power consumption in W	10 W at 24 V AC/DC
Realtime clock	Built-in clock, clock drift <= 30 s/month at -20...65 °C
Memory type	1 MB flash 380 kB RAM
Overvoltage category	II
Local signalling	1 LED (green) for USB pendrive download status
Mounting support	Panel mounting with accessory DIN rail
Width	72 mm
Height	110 mm
Depth	60 mm
Net weight	0.172 kg

Environment

Directives	2014/30/EU - electromagnetic compatibility 2014/35/EU - low voltage directive
Standards	CAN/CSA-E60730-1 CSA E60730-2-9 EN 60068-2-27 EN 60068-2-6 Fc EN 60730-1 EN 60730-2-9 UL 60730-1 UL 60730-2-9 IEC 61000-4-2 IEC 61000-4-3 IEC 61000-4-4 IEC 61000-4-5 IEC 61000-4-6 IEC 61000-4-11 UL94 (material V0)
Product certifications	EAC (pending) CE cURus CSA RCM (pending)
Ambient air temperature for operation	-20...65 °C conforming to UL 60730-1 conforming to EN 60730-1 conforming to EN 60730-2-9
Ambient air temperature for storage	-30...70 °C
Relative humidity	5...95 % non-condensing

IP degree of protection	IP20 conforming to EN/IEC 60730
Pollution degree	2
Operating altitude	0...2000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.000 cm
Package 1 Width	9.300 cm
Package 1 Length	13.500 cm
Package 1 Weight	243.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.934 kg

Contractual warranty

Warranty (in months)	18
----------------------	----

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Total lifecycle Carbon footprint	222 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	23 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	199 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.7 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better

 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	5d9a98af-cbc8-4e06-b2e0-808d11abd514
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold

Use Longer


 Lifetime extension	
Repair	No
Updatability	Yes

Use Again

 Repack and remanufacture	
Recyclability potential, in %	0
End of life manual availability	End of Life Information
Take-back	Nej
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings


Dimensions

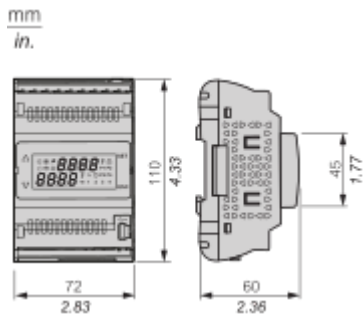


Mounting and Clearance

Mounting

Clearance

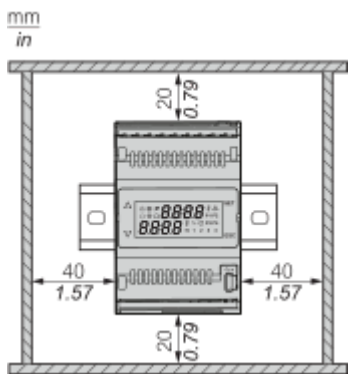



Misplacement

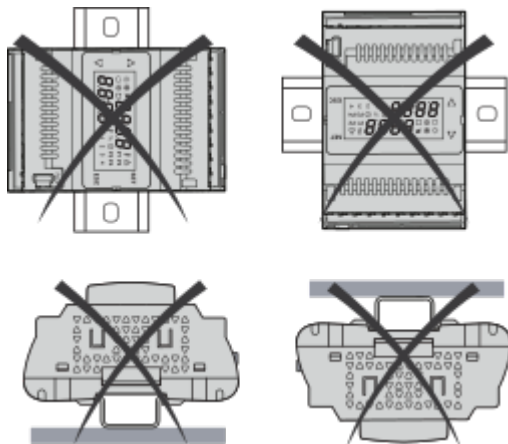


Connections and Schema

Wiring


Power supply

24 Vac	24 Vdc
	
(1)Type T fuse 1.25 A	

Digital input

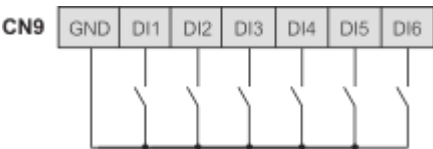


Digital output

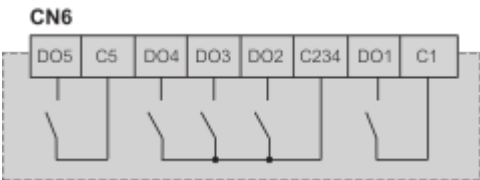

DO1, DO2, DO3, DO4, DO5: relay SPST 3 A 250 Vac

Analog inputs

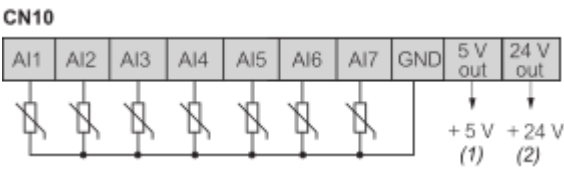


- (1) Max. current : 50 mA.
(2) Max. current : 125 mA.

Analog Output



CN2, CN3 RS 485 port

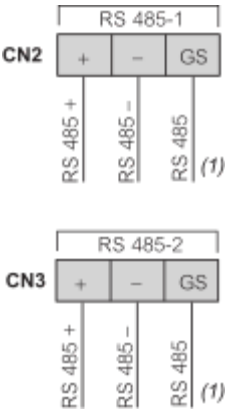

(1) Signal Reference

Image of product / Alternate images

Alternative

