

Product data sheet

Specifications



discrete I/O module Modicon Quantum - 16 I - 115 V AC - 8 O solid state

140DAM59000C

⚠ Discontinued on: 31 December 2021

⚠ To be end-of-service on: 31 December 2029

⚠ Discontinued - Service only

Main

Range of product	Modicon Quantum automation platform
Product or component type	Mixed discrete I/O module
Discrete I/O number	24

Complementary

Discrete input number	16 2 groups of 8
Addressing requirement	1 input word 0.5 output word
Network frequency limits	47...63 Hz
Discrete input voltage	115 V AC
Input voltage limits	132 V typical 156 V during 10 s 200 V during one cycle
Voltage state 0 guaranteed	0...20 V
Voltage state 1 guaranteed	79...132 V 60 Hz 85...132 V 50 Hz
Current state 0 guaranteed	<= 0.5 mA
Current state 1 guaranteed	<= 11 mA 50 Hz <= 13.2 mA 60 Hz
Input impedance	14400 Ohm capacitive
Response time	4.9...0.75 ms at at state 0 to state 1 7.3...12.3 ms at at state 1 to state 0
Discrete output number	8 2 groups of 4
Discrete output type	Solid state
Discrete output voltage	115 V
Output voltage limits	156 V AC during 10 s 200 V AC during 1 cycle 85...132 V typical AC typical
Minimum load	5 mA
Maximum load current	<= 4 A per point <= 8 A per group <= 8 A per module
Maximum voltage drop	<1.5 V
Absolute maximum output	20 A 2 cycles per point

	26 A 3 cycles per group 30 A 1 cycle per point 30 A 2 cycles per group 45 A 1 cycle per group 10 A 3 cycles per point
DV/Dt	400 V/μs
Maximum leakage current	2.1 mA 115 V AC input circuit 2 mA output circuit
Response time on output	<= 0.5 ms at state 0 to state 1 <= 0.5 ms at state 1 to state 0
Protection type	Internal output protection by 5 A fuse per group On output by RC filter
Isolation between group	1000 Vrms for 1 minute
Isolation between channels and bus	1780 Vrms for 1 minute
Fault indication	Blown fuse on output Loss of field power on output
Power dissipation	5.5 W + (1.1 x total module load current)
External power requirement	85...132 V AC for output circuit
Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for no voltage in output and input (F) 2 LEDs (green) for output is turned on 2 LEDs (red) for fault detected on the input point 2 LEDs (red) for fault detected on the output point
Marking	CE
Bus current requirement	250 mA
Net weight	0.45 kg

Environment

Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m
Protective treatment	Conformal coating Humiseal 1A33
Standards	CSA C22.2 No 142 FM Class 1 Division 2 UL 508
Product certifications	cUL

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	16.3 cm
Package 1 Width	4.5 cm
Package 1 Length	31.2 cm
Package 1 Weight	565.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	2

Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	1.108 kg

Offer Sustainability


EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
----------	-----------


Racks for Modules Mounting

Dimensions of Modules and Racks

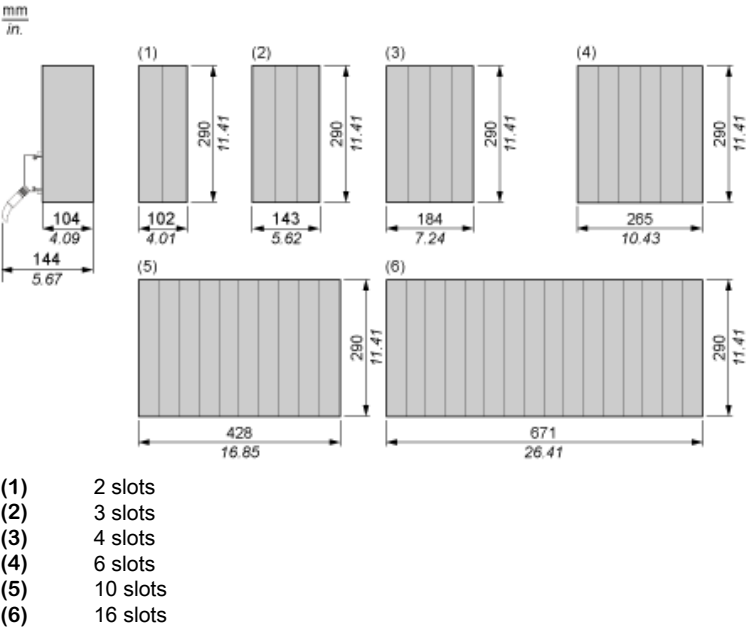

115 Vac Discrete Input/Output Module

Wiring Diagram

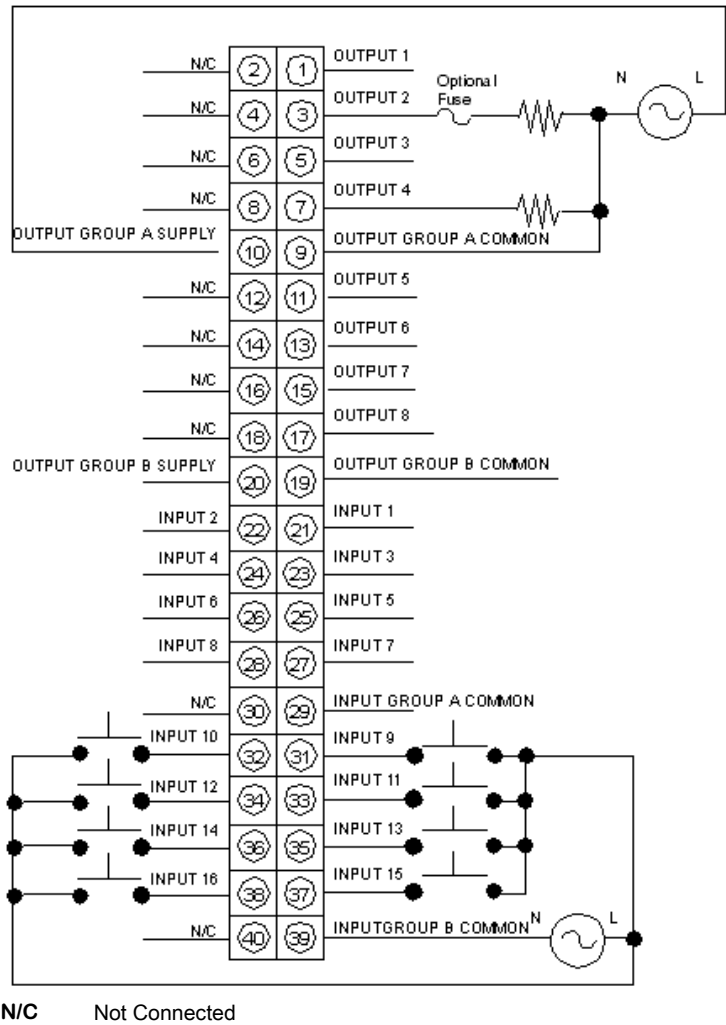

Recommended replacement(s)