



circuit breaker 3VT2 standard breaking capacity  $I_{cu}=36\text{kA}$ , 415V AC 3-pole; circuit breaker with ETU motor/transformer protection ETU MP, LI IR=63...160A, overload protection IRM=0.2...2kA short-circuit protection, without auxiliary release without auxiliary/alarm switch

Model	
product brand name	SENTRON
product designation	3VT1_5 molded case circuit breakers
design of the actuating element	toggle handle
type of the driving mechanism motor drive	No
design of the overcurrent release	ETU MP
General technical data	
number of poles	3
size of the circuit-breaker	3VT2
mechanical service life (operating cycles) typical	30 000
electrical endurance (operating cycles) typical	3 000
utilization category	A
performance class for circuit breaker	N
operating frequency maximum	120 1/h
Voltage	
surge voltage resistance rated value	8 kV
Protection class	
protection class IP	IP40
protection function of the overcurrent release	LI
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	6 W
Main circuit	
operating frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
operating power at AC-3	
• at 230 V rated value	395 kW
operational current rated value	160 A
Auxiliary circuit	
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
Suitability	
suitability for use	motor- / line protection
suitability for use disconnecting means	Yes
Adjustable parameters	
adjustable current response value current of the current-dependent overload release initial value	63 A

## Product details

<b>product component</b>	
• trip indicator	No
• auxiliary switch	No
• voltage trigger	No
• undervoltage release	No
• undervoltage release with leading contact	No
<b>product extension optional motor drive</b>	Yes

## Product function

<b>product function</b>	
• of thermal overload trip unit	adjustable
• grounding protection	No
• for neutral conductors short-circuit and overload proof	No
• phase failure detection	No
• overload protection	Yes

## Short circuit

<b>operating short-circuit current breaking capacity (Ics)</b>	
• at 240 V rated value	30 kA
• at 415 V rated value	18 kA
• at 500 V rated value	8 kA
• at 690 V rated value	5 kA
<b>maximum short-circuit current breaking capacity (Icu)</b>	
• at 240 V rated value	60 kA
• at 415 V rated value	36 kA
• at 500 V rated value	16 kA
• at 690 V rated value	10 kA

## Connections

arrangement of electrical connectors for main current circuit	front side
type of electrical connection for main current circuit	screw-type terminals

## Mechanical Design

<b>height</b>	225 mm
<b>width</b>	105 mm
<b>depth</b>	117 mm
<b>fastening method</b>	fixed mounting
<b>mounting position</b>	with vertical mounting surface +/-180° rotatable, with vertical mounting surface +/- 30° tiltable to the front and back
<b>Net Weight</b>	0.317 kg

## Environmental conditions

<b>ambient temperature during operation</b>	
• minimum	-40 °C
• maximum	70 °C
<b>ambient temperature during storage</b>	
• minimum	-40 °C
• maximum	70 °C

## Certificates

<b>reference code according to EN 61346-2</b>	Q
<b>reference code according to IEC 81346-2</b>	Q

## Approvals Certificates

Environment	General Product Approval	Test Certificates	other
-------------	--------------------------	-------------------	-------

[Environmental Confirmations](#)



[Confirmation](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)



## other

[Miscellaneous](#)

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VT2716-2AP36-0AA0>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VT2716-2AP36-0AA0>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[https://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VT2716-2AP36-0AA0](https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VT2716-2AP36-0AA0)

### CAX-Online-Generator


<https://www.siemens.com/cax>

### Tender specifications

<https://www.siemens.com/specifications>

### Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

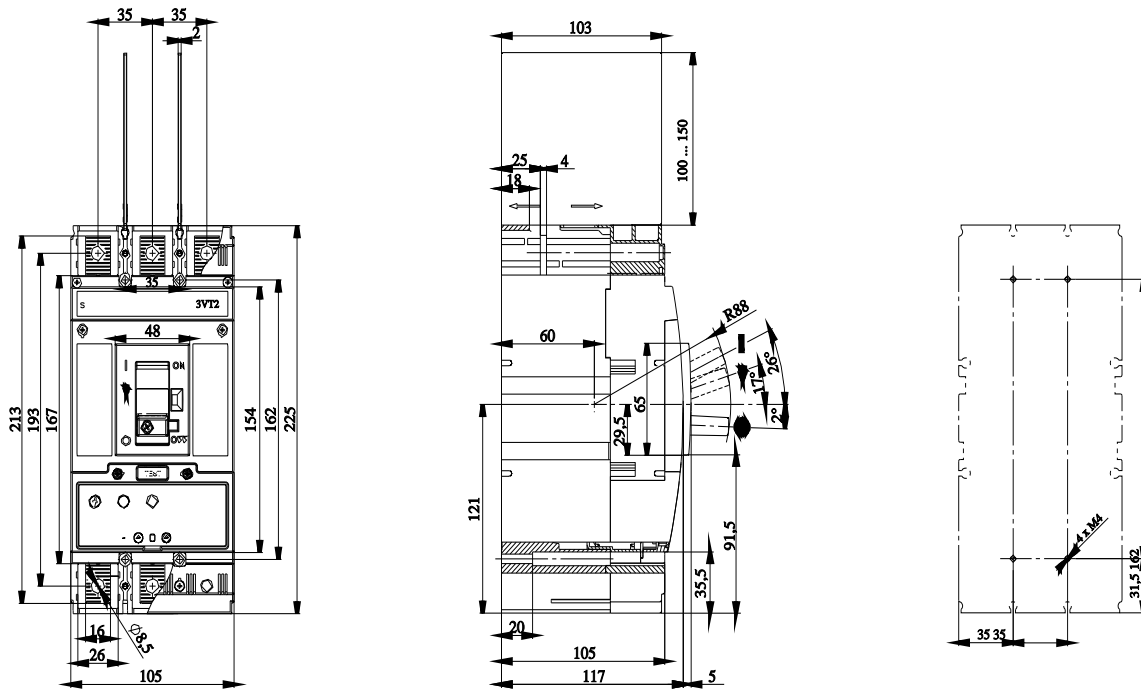



last modified:

6/15/2025 

