

Product data sheet

Specifications



Solid state relay, Harmony SE Relays, SPST, panel and DIN rail mount, SCR, AC zero cross, 22mm, 30A, 48 to 660V AC, 4 to 32V DC, 1NO

SSR630DIN-DC22

! Discontinued

! Discontinued on: Oct 22, 2024

Product availability: Stock - Normally stocked in distribution facility

Main

Range	Legacy
Product Type	Solid state relay
maximum output current	30 A
Mounting Support	Panel DIN rail
Network Number of Phases	1 phase
Output Voltage	48...660 V AC

Complementary

Input Current Limits	8...12 mA at 32 V DC typical
Switch Function	SPST
Contacts Type and Composition	NO
Tightening Torque	0.6...0.7 N.m for input 0.6...0.7 N.m for output
Connections Terminals	Input screw AWG 10) Output screw AWG 10)
Local Signalling	1 LED (green) for input status
Switching Voltage	4 V DC turn-on 1 V DC turn-off
Switching Device	SCR output Zero voltage switching
Maximum Peak Voltage	1200 V
Surge Current	1200 A 16.6 ms
Voltage Drop	<1.6 V on-state
Maximum I²t for fusing	6000 A².s 8.3 ms
Leakage Current	1 mA at off-state
DV/dt	500 V/µs off-state maximum
Response Time	8.33 ms (turn-on, turn-off)
Height	3.8 in (97.7 mm)
Width	0.9 in (22.4 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Depth	3.1 in (80 mm)
Product Weight	9.9 oz (280 g)

Environment

Product Certifications	CSA CE
Ambient Air Temperature for Operation	-40...176 °F (-40...80 °C)
Ambient Air Temperature for Storage	-40...257 °F (-40...125 °C)

Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2
GTIN	3606480282928
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.40 in (11.18 cm)
Package 1 Width	1.20 in (3.05 cm)
Package 1 Length	4.40 in (11.18 cm)
Package weight(Lbs)	0.64 lb(US) (0.29 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained](#) >

[How we assess product sustainability](#) >


Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	134201bc-d293-4667-9cca-10a7f11729e0
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer

Lifetime extension	
Repair	No

Approximate Dimensions

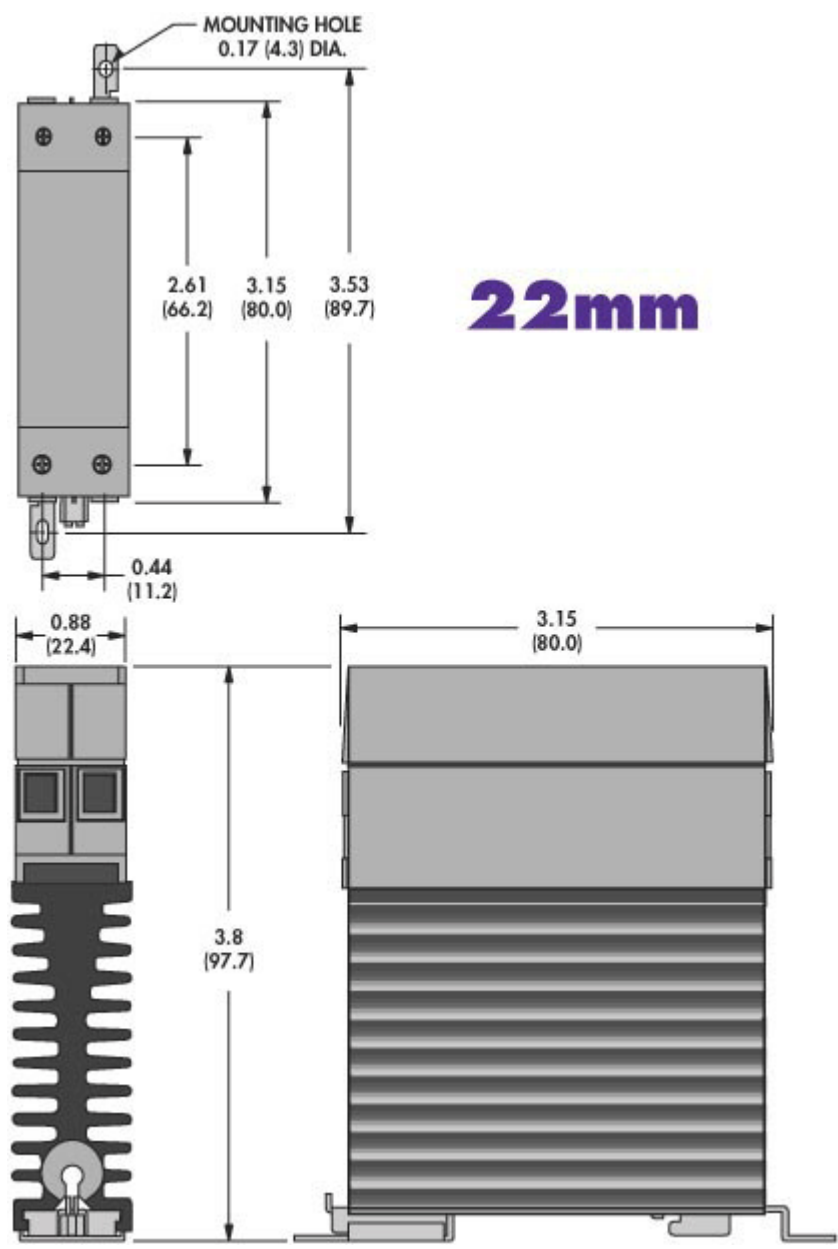

Connections and Schema

Connections and Wiring Diagrams

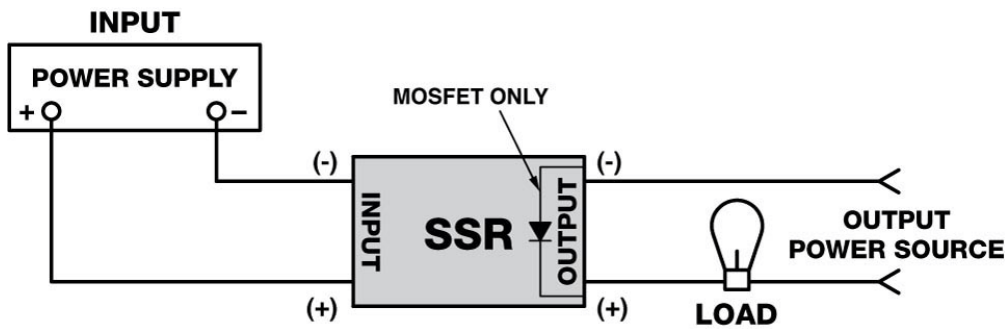


Image of product / Alternate images

Alternative



