



Price* : 1,280.00 GBP



Main

Range of product	Modicon Quantum automation platform
Product or component type	Dc discrete output module
Discrete output number	32

Complementary

Group of channels	4 groups of 8
Discrete output logic	Negative logic (sink)
Addressing requirement	2 output words 2 input words
Discrete output voltage	10...30 V DC
Absolute maximum output	50 V for 1 s decaying pulse
Maximum voltage drop	<0.4 V 0.5 A
Maximum load current	<= 0.5 A each point <= 16 A per module <= 4 A each group
Surge current	2.5 A for 1 ms
Response time	<= 2 ms at state 0 to state 1 <= 2 ms at state 1 to state 0 1 ms at state 0 to state 1 1 ms at state 1 to state 0
Short-circuit protection	With
Output overvoltage protection	With
Load inductance	$\text{Inductance(H)} = 0.5 / ((\text{current(A)})^2 \times (\text{switching frequency(Hz)}))$ 0.5...4 Hz
Maximum tungsten load	<2.5 W 10 V <3 W 12 V <6 W 24 V
Fault indication	Incorrect output state Loss of field power Blown fuse

Protection type	Internal output protection by 5 A fuse per group
Power dissipation	2.5 W + (0.1 x all points on) + (0.4 x total load current)
Marking	CE
Local signalling	Bus communication is present (Active): 1 LED (green) External fault detected (F): 1 LED (red) Input status: 32 LEDs (green)
Bus current requirement	500 mA
Module format	Standard
Net weight	0.3 kg

Environment

Product certifications	GOST FM Class 1 Division 2 RMRS C-Tick
Standards	UL 508 CSA C22.2 No 142
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 Download RoHS China Declaration
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
CALIFORNIA PROPOSITION 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
----------	-----------

Racks for Modules Mounting

Dimensions of Modules and Racks

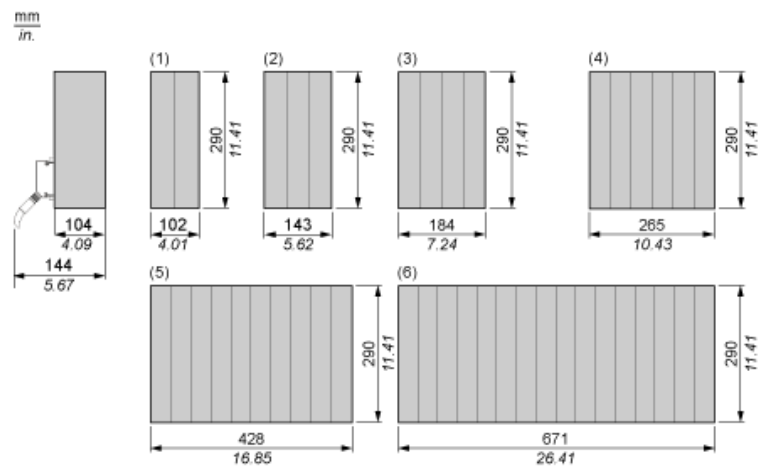

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

10...30 Vdc Verified Output 32-point Module

Wiring Diagram

