

Product data sheet

Specifications



15" wide Panel PC, Harmony PSA6, Intel Core i5 1345UE with 1.4GHz, 24VDC, 58W

HMIPSA65FD18W11

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony PSA6
Device short name	All in one Panel PC
Product or Component Type	Panel PC
Operating System	Windows 11 IoT Enterprise 2024 LTSC 64 bit
Processor name	Intel Core i5 1345UE at 1400 MHz P-Core: 2 12 Intel Core i5 1345UE at 1400 MHz E-Core: 8 12
Memory type	8 GB M.2 SSD DDR5
Data storage equipment	128 GB M.2 SSD

Complementary

Display size	15 inch
Aspect ratio	16:9
Display Type	TFT LCD screen
Display Resolution	1920 x 1080 pixels full HD
Display colour	16 million colours
Touch panel	Projected capacitive technology (PCT)
Backlight lifespan	70000 hours 16 million colours at 77 °F (25 °C)
Integrated connection type	COM1 serial link with 1 plug SUB-D 9, RS232 - 2400...115200 bps on bottom non-isolated COM2 serial link with 1 plug SUB-D 9, RS422/RS485 - 2400...115200 bps on bottom non-isolated USB 3.1 port with 2 USB type A on bottom USB 2.0 port with 2 USB type A on bottom Ethernet with 3 RJ45, 10 BASE-T/100 BASE-TX/1000 BASE-T - 10/100/1000 Mbps on bottom display port with 1 DP on bottom DP++
Number of slots	1 slot(s) for M.2
[Us] rated supply voltage	24 V DC power supply
Power Consumption in W	58 W
Inrush current	30 A
Type of cooling	AN (air natural)
Fixing mode	by 4 M4 screws
Device mounting	Panel mounting VESA mounting
Cut-out dimensions	394 (+ 1/- 0) x 250 (+ 1/- 0) mm
Width	16.0 in (406.4 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Depth	2.3 in (58.8 mm)
Height	10.3 in (262.4 mm)
Net Weight	10.8 lb(US) (4.9 kg)

Environment

Standards	UL 61010
Product certifications	UL RCM KC UKCA CE
IP degree of protection	IP66 front: IP20 rear:
Ambient air temperature for operation	32...122 °F (0...50 °C) with an airflow velocity of 0.6 m/s)
Ambient air temperature for storage	-4...140 °F (-20...60 °C)
Pollution degree	2
Operating altitude	0...6561.68 ft (0...2000 m)
Vibration resistance	3.5 mm 5...9 Hz) - single amplitude - IEC 61131-2
Shock resistance	147 m/s² X, Y, Z directions for 3 times IEC 61131-2

Ordering and shipping details

Category	US10MC222577
Discount Schedule	0MC2
GTIN	3606487475958
Returnability	Yes
Country of origin	TW

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	16.142 in (41.000 cm)
Package 1 Width	7.677 in (19.500 cm)
Package 1 Length	20.866 in (53.000 cm)
Package weight(Lbs)	0.236 oz (6.690 g)
Unit Type of Package 2	P06
Number of Units in Package 2	6
Package 2 Height	40.551 in (103.000 cm)
Package 2 Width	23.622 in (60.000 cm)
Package 2 Length	31.496 in (80.000 cm)
Package 2 Weight	130.073 lb(US) (59.000 kg)



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	1 857 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Carbon footprint of the manufacturing phase [A1 to A3]	108 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	3 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.1 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	1 736 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	8 kg CO2 eq.

Use Better



Materials and Substances

F-gas usage performance	Only air and vacuum used for insulation / breaking, no F-gas including SF6
Average percentage of recycled metal content	46 %
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
SCIP Number	307efd9b-f27c-4147-8d7d-2e755739c323
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Product contains halogen above thresholds
PVC free	No
Silicon free	No

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	62
-------------------------------	----

Circularity Profile	End of Life Information
Removable battery	User replaceable
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

External Dimensions (15-inch Wide)

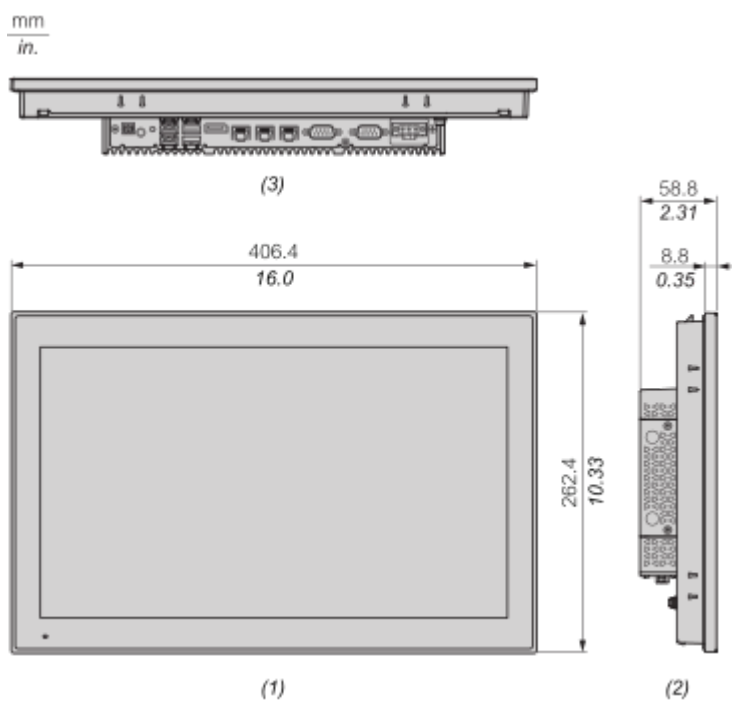


- (1) : Front
- (2) : Left
- (3) : Bottom

Mounting and Clearance


Mounting

Panel Cut Dimensions

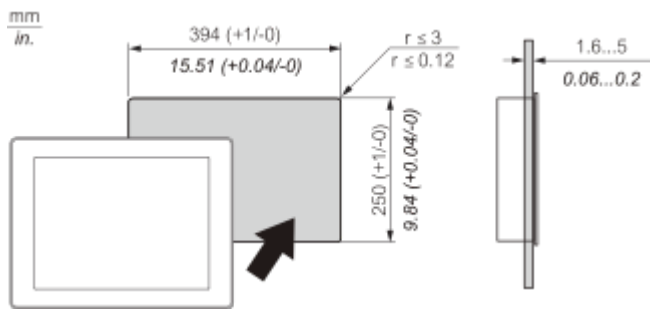


Mounting Angle

When installing this product in a slanted position, the product face should not incline more than 30°.




Clearance

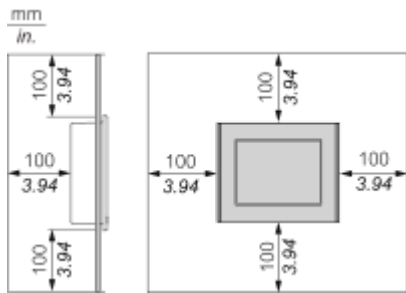


Technical Illustration

Dimensions

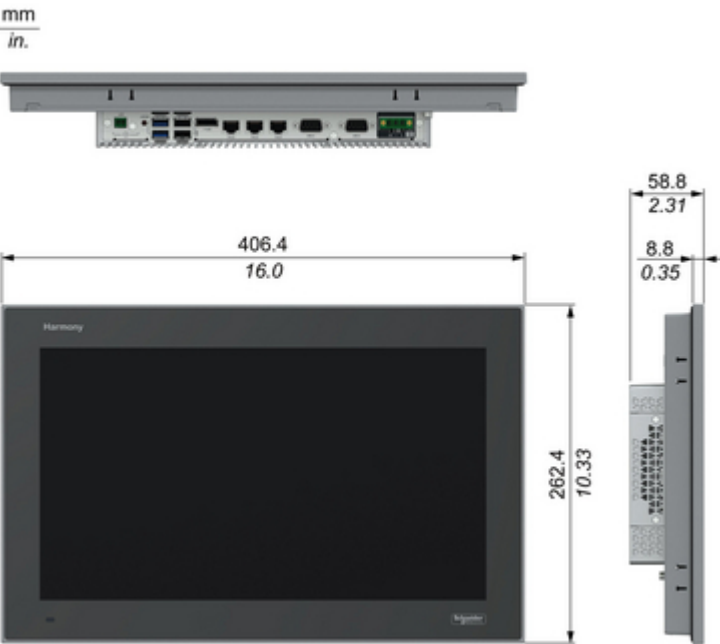

Offer Marketing Illustration

Product benefits / Features

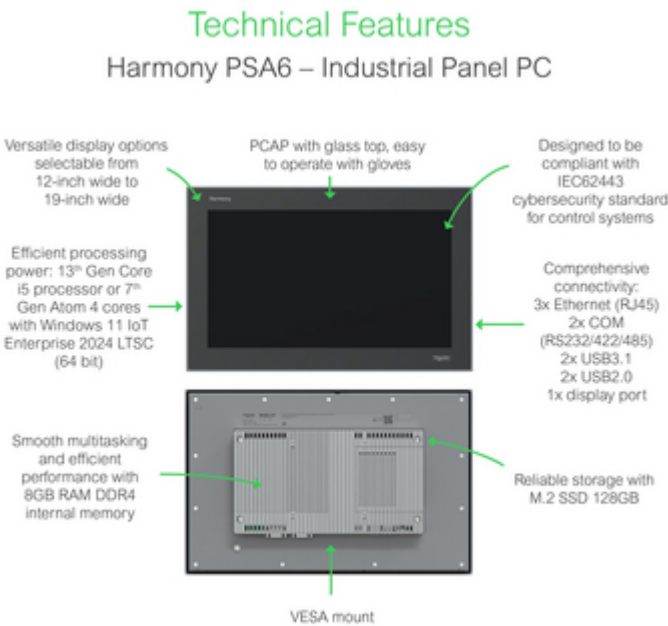

Offer Marketing Illustration

Product benefits / Features

Benefits

Harmony PSA6 – Industrial Panel PC



Powerful

Reliable performance
with advanced CPUs
and latest OS




Cost Effective

Value-driven design
for clean
environments



Slim Design

Ideal for constrained
space within
cabinets



Secure and Durable

Built to secure,
designed to sustain



Versatile

Seamlessly supports
a wide range of
EcoStruxure software



High availability

and global support

Image of product / Alternate images

Alternative

