


Guide Frame, Frame Size-1 1250A,3P Top Horizontal, Bottom Vertical, With Safety shutter and 2x Aux Connectors

Model	
design of the product	AC
number of poles	3
size of the circuit-breaker	1
switching capacity class of the circuit breaker	S
type of electrical connection	Suitablefor circuit breakers- 800A to 1250A
• for main current circuit	horizontal on top and vertical at the bottom
Net Weight	22.5 kg
Approvals Certificates	
General Product Approval	



Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WJ8112-2AA36-1BA1
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3WJ8112-2AA36-1BA1
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WJ8112-2AA36-1BA1
CAX-Online-Generator https://www.siemens.com/cax
Tender specifications https://www.siemens.com/specifications
Characteristic curves <a href='https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>'>https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod_no>

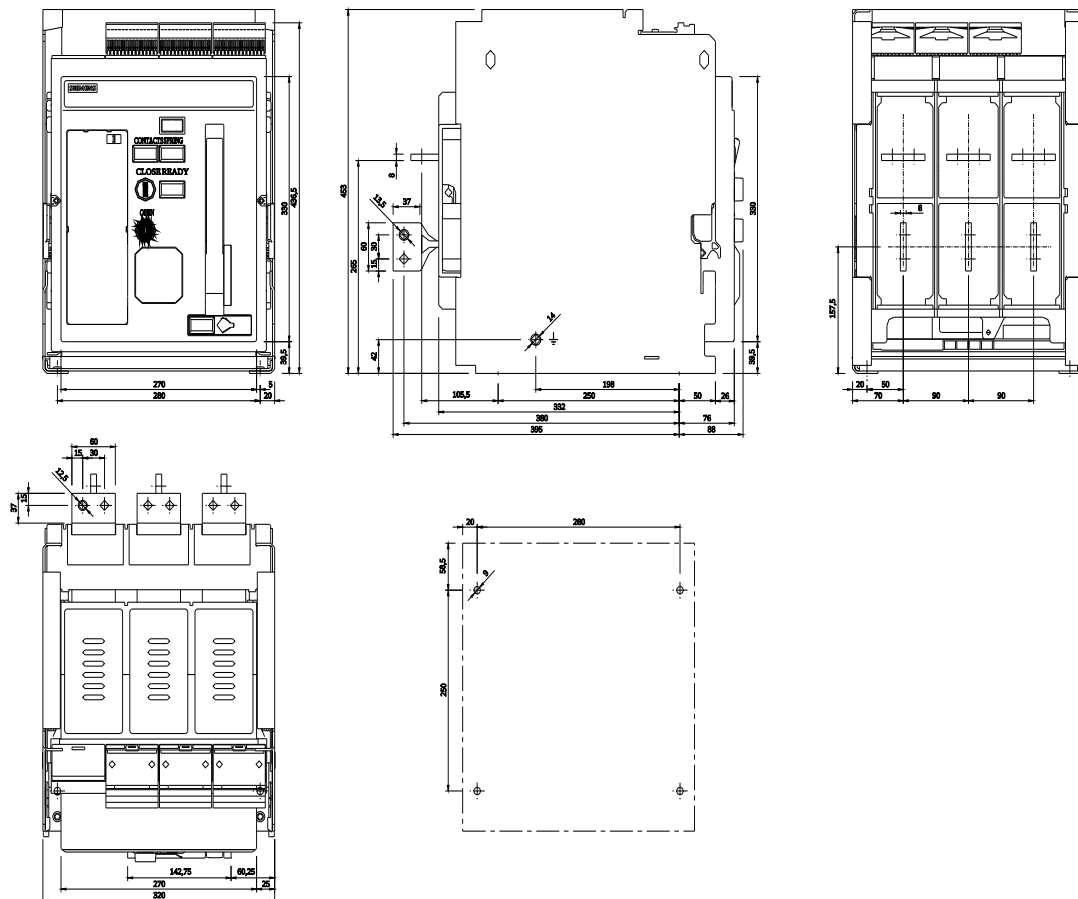

last modified:

4/4/2025 

