



stand-alone assembly support for 3RU21/3RB30/3RB31/3RR2 Size S0 Stand-alone installation Main circuit: Screw Auxiliary circuit: --

product brand name	SIRIUS
product category	Terminal support
product designation	individual mount
product type designation	3RU29
<b>General technical data</b>	
size of overload relay	S0
protection class IP on the front	IP20
• according to IEC 60529	
Substance Prohibittance (day/month/year)	10/01/2009
Net Weight	0.076 kg
<b>Ambient conditions</b>	
ambient temperature	-20 ... +70 °C
• during operation	
• during storage	-50 ... +80 °C
<b>Electrical Safety</b>	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
<b>Installation/ mounting/ dimensions</b>	
fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	97 mm
width	45 mm
depth	87 mm
<b>Connections/ Terminals</b>	
type of electrical connection	screw-type terminals
• for main current circuit	
type of connectable conductor cross-sections	1x (1 ... 10 mm <sup>2</sup> ) 1x (1 ... 10 mm <sup>2</sup> ) 1 ... 6 mm <sup>2</sup> 1x (16 ... 8)
• for main contacts	
— solid	
— stranded	
— finely stranded with core end processing	
• for AWG cables for main contacts	
<b>Approvals Certificates</b>	
Environment	General Product Approval

[Environmental Conformations](#)



**Test Certificates**      **Maritime application**

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



**Maritime application**      **other**



[Confirmation](#)



**Further information**

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2926-3AA01>

**Cax online generator**


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2926-3AA01>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2926-3AA01>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RU2926-3AA01&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2926-3AA01&lang=en)

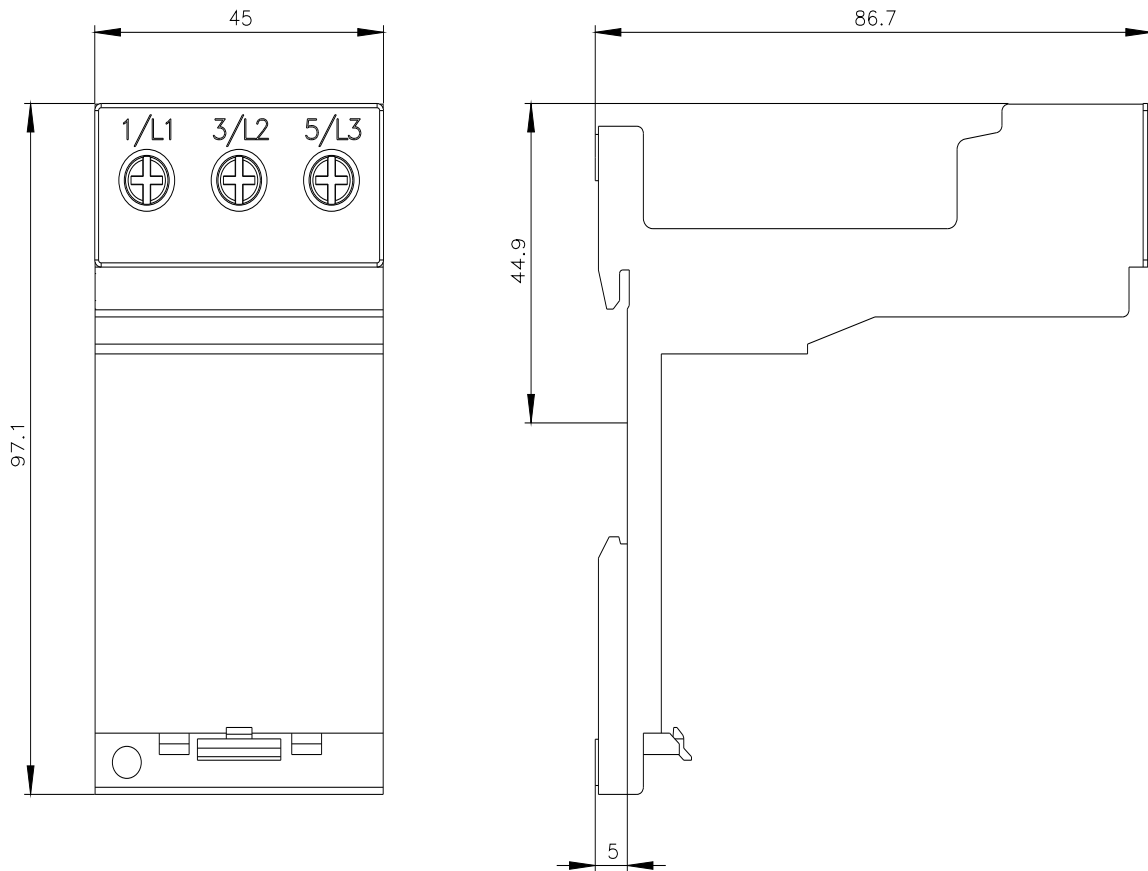

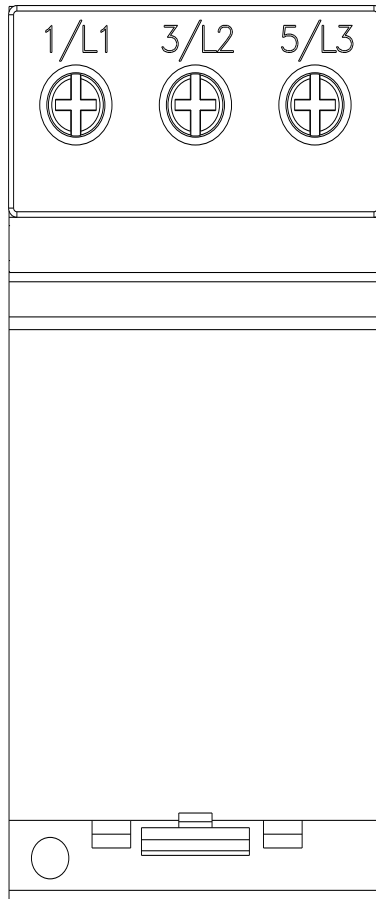

1/L1

3/L2

5/L3