

Circuit breaker size S00 for motor protection, CLASS 10 A-release 1.4...2 A N-release 26 A screw terminal Standard switching capacity Reusable packaging Pack = 96 units

|                                                                                                |                        |
|------------------------------------------------------------------------------------------------|------------------------|
| product brand name                                                                             | SIRIUS                 |
| product designation                                                                            | Circuit breaker        |
| design of the product                                                                          | For motor protection   |
| product type designation                                                                       | 3RV1                   |
| <b>General technical data</b>                                                                  |                        |
| Product equipment of circuit breaker for motor protection complete unit with protection device | Yes                    |
| size of the circuit-breaker                                                                    | S00                    |
| size of contactor can be combined company-specific                                             | S00                    |
| product function disconnecter functionality                                                    | Yes                    |
| product extension auxiliary switch                                                             | Yes                    |
| power loss [W] for rated value of the current                                                  |                        |
| • at AC in hot operating state                                                                 | 7.25 W                 |
| • at AC in hot operating state per pole                                                        | 2.4 W                  |
| type of calculation of power loss current-dependent                                            | quadratic              |
| insulation voltage with degree of pollution 3 at AC rated value                                | 690 V                  |
| surge voltage resistance rated value                                                           | 6 kV                   |
| maximum permissible voltage for protective separation                                          |                        |
| • in networks with ungrounded star point between main and auxiliary circuit                    | 400 V                  |
| • in networks with grounded star point between main and auxiliary circuit                      | 400 V                  |
| protection class IP                                                                            |                        |
| • on the front according to IEC 60529                                                          | IP20                   |
| • on the front                                                                                 | IP20                   |
| • of the terminal                                                                              | IP00                   |
| mechanical service life (operating cycles)                                                     |                        |
| • of the main contacts typical                                                                 | 100 000                |
| • of auxiliary contacts typical                                                                | 100 000                |
| electrical endurance (operating cycles) typical                                                | 100 000                |
| reference code according to IEC 81346-2                                                        | Q                      |
| continuous current rated value                                                                 | 2 A                    |
| Substance Prohibitance (day/month/year)                                                        | 01/01/2013             |
| SVHC substance name                                                                            | Lead CAS-No. 7439-92-1 |
| Net Weight                                                                                     | 0.265 kg               |
| <b>Ambient conditions</b>                                                                      |                        |
| installation altitude at height above sea level maximum                                        | 2 000 m                |
| ambient temperature                                                                            |                        |
| • during operation                                                                             | -20 ... +60 °C         |
| • during storage                                                                               | -50 ... +80 °C         |
| • during transport                                                                             | -50 ... +80 °C         |
| temperature compensation                                                                       | -20 ... +60 °C         |
| relative humidity during operation                                                             | 10 ... 95 %            |
| <b>Main circuit</b>                                                                            |                        |
| number of poles for main current circuit                                                       | 3                      |
| adjustable current response value current of the current-dependent overload release            | 1.4 ... 2 A            |
| type of voltage for main current circuit                                                       | AC                     |
| operating voltage                                                                              |                        |
| • rated value                                                                                  | 690 V                  |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• rated value</li> <li>• at AC-3 rated value maximum</li> <li>• at AC-3e rated value maximum</li> </ul>                                                                                                                                                                                                                                                                                                             | 20 ... 690 V<br>690 V<br>690 V                                                     |
| <b>operating frequency rated value</b>                                                                                                                                                                                                                                                                                                                                                                                                                     | 50 ... 60 Hz                                                                       |
| <b>operational current rated value</b>                                                                                                                                                                                                                                                                                                                                                                                                                     | 2 A                                                                                |
| <b>operational current</b> <ul style="list-style-type: none"> <li>• at AC-3 at 400 V rated value</li> <li>• at AC-3e at 400 V rated value</li> </ul>                                                                                                                                                                                                                                                                                                       | 2 A<br>2 A                                                                         |
| <b>operating power</b> <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 0.4 kW<br>0.75 kW<br>0.8 kW<br>1.1 kW<br><br>0.4 kW<br>0.75 kW<br>0.8 kW<br>1.1 kW |
| <b>operating frequency</b> <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> </ul>                                                                                                                                                                                                                                                                                                                                 | 15 1/h<br>15 1/h                                                                   |
| <b>Auxiliary circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                    |
| <b>type of voltage for auxiliary and control circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                   | AC/DC                                                                              |
| <b>number of NC contacts for auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                        | 0                                                                                  |
| <b>number of NO contacts for auxiliary contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                        | 0                                                                                  |
| number of CO contacts for auxiliary contacts                                                                                                                                                                                                                                                                                                                                                                                                               | 0                                                                                  |
| <b>Protective and monitoring functions</b>                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                    |
| <b>product function</b> <ul style="list-style-type: none"> <li>• ground fault detection</li> <li>• phase failure detection</li> </ul>                                                                                                                                                                                                                                                                                                                      | No<br>Yes                                                                          |
| <b>trip class</b>                                                                                                                                                                                                                                                                                                                                                                                                                                          | CLASS 10                                                                           |
| <b>design of the overload release</b>                                                                                                                                                                                                                                                                                                                                                                                                                      | thermal                                                                            |
| <b>maximum short-circuit current breaking capacity (Icu)</b> <ul style="list-style-type: none"> <li>• at AC at 240 V rated value</li> <li>• at AC at 400 V rated value</li> <li>• at AC at 500 V rated value</li> <li>• at AC at 690 V rated value</li> </ul>                                                                                                                                                                                              | 100 kA<br>100 kA<br>10 kA<br>2 kA                                                  |
| <b>operating short-circuit current breaking capacity (Ics) at AC</b> <ul style="list-style-type: none"> <li>• at 240 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>                                                                                                                                                                                                              | 100 kA<br>100 kA<br>100 kA<br>2 kA                                                 |
| response value current of instantaneous short-circuit trip unit                                                                                                                                                                                                                                                                                                                                                                                            | 26 A                                                                               |
| <b>UL/CSA ratings</b>                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                    |
| <b>full-load current (FLA) for 3-phase AC motor</b> <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                                               | 2 A<br>2 A                                                                         |
| <b>yielded mechanical performance [hp]</b> <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>                                                                                                       | 0.13 hp<br><br>1 hp<br>1 hp                                                        |
| <b>Short-circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                    |
| <b>product function short circuit protection</b>                                                                                                                                                                                                                                                                                                                                                                                                           | Yes                                                                                |
| <b>design of the short-circuit trip</b>                                                                                                                                                                                                                                                                                                                                                                                                                    | magnetic                                                                           |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b>                                                                                                                                                                                                                                                                                                                                                             |                                                                                    |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 400 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | none required<br>gL/gG 35 A<br>gL/gG 25 A<br>gL/gG 25 A                                                                                                                        |
| certificate of suitability according to ATEX directive 2014/34/EU                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | DMT 02 ATEX F 001                                                                                                                                                              |
| <b>type of protection according to ATEX directive 2014/34/EU</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Ex II (2) GD                                                                                                                                                                   |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                |
| <b>mounting position</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | any                                                                                                                                                                            |
| <b>fastening method</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715                                                                                                       |
| <b>Mounting method of circuit breaker for Transformer protection, Generator protection and system protection optional standard bar mounting</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Yes                                                                                                                                                                            |
| <b>height</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 90 mm                                                                                                                                                                          |
| <b>width</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 45 mm                                                                                                                                                                          |
| <b>depth</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 75 mm                                                                                                                                                                          |
| <b>required spacing</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for live parts at 400 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts at 500 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for live parts at 500 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts at 690 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> <li>• for live parts at 690 V               <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul> | 20 mm<br>20 mm<br>9 mm<br><br>20 mm<br>20 mm<br>9 mm<br><br>20 mm<br>20 mm<br>9 mm<br><br>20 mm<br>20 mm<br>0 mm<br>9 mm<br>0 mm<br><br>20 mm<br>20 mm<br>0 mm<br>9 mm<br>0 mm |
| <b>Connections/ Terminals</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                |
| <b>product component removable terminal for auxiliary and control circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | No                                                                                                                                                                             |
| <b>type of electrical connection</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | screw-type terminals                                                                                                                                                           |
| <b>arrangement of electrical connectors for main current circuit</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Top and bottom                                                                                                                                                                 |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• for main contacts               <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 2x (0,5 ... 1,5 mm²), 2x (0,75 ... 2,5 mm²), 2x (1 ... 4 mm²)<br>2x (0,5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)                                                                   |
| <b>connectable conductor cross-section for main contacts</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 0.5 ... 4 mm²<br>0.5 ... 2.5 mm²                                                                                                                                               |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                          |                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| — solid or stranded                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                          | 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)                                                                                 |
| AWG number as coded connectable conductor cross section for main contacts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          | 18 ... 14                                                                                                                   |
| tightening torque                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                          |                                                                                                                             |
| • for main contacts with screw-type terminals                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                          | 0.8 ... 1.2 N·m                                                                                                             |
| • for auxiliary contacts with screw-type terminals                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                          | 0.8 ... 1.2 N·m                                                                                                             |
| design of screwdriver shaft                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          | Diameter 5 to 6 mm                                                                                                          |
| size of the screwdriver tip                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          | Pozidriv size 2                                                                                                             |
| design of the thread of the connection screw                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                          |                                                                                                                             |
| • for main contacts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                          | M3                                                                                                                          |
| Safety related data                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                          |                                                                                                                             |
| product function suitable for safety function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                          | Yes                                                                                                                         |
| suitability for use                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                          |                                                                                                                             |
| • safety-related switching on                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                          | No                                                                                                                          |
| • safety-related switching OFF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                          | Yes                                                                                                                         |
| service life maximum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          | 10 a                                                                                                                        |
| test wear-related service life necessary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                          | Yes                                                                                                                         |
| proportion of dangerous failures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                          |                                                                                                                             |
| • with low demand rate according to SN 31920                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                          | 40 %                                                                                                                        |
| • with high demand rate according to SN 31920                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                          | 50 %                                                                                                                        |
| B10 value with high demand rate according to SN 31920                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                          | 5 000                                                                                                                       |
| failure rate [FIT] with low demand rate according to SN 31920                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                          | 50 FIT                                                                                                                      |
| ISO 13849                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |                                                                                                                             |
| device type according to ISO 13849-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          | 3                                                                                                                           |
| overdimensioning according to ISO 13849-2 necessary                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                          | Yes                                                                                                                         |
| IEC 61508                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |                                                                                                                             |
| safety device type according to IEC 61508-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                          | Type A                                                                                                                      |
| Electrical Safety                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                          |                                                                                                                             |
| protection class IP on the front according to IEC 60529                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          | IP20                                                                                                                        |
| touch protection on the front according to IEC 60529                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          | finger-safe, for vertical contact from the front                                                                            |
| Display                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          |                                                                                                                             |
| display version for switching status                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          | Rocker switch                                                                                                               |
| Approvals Certificates                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                          |                                                                                                                             |
| Environment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | General Product Approval |                                                                                                                             |
| <div><div><a href="#">Environmental Conformations</a></div><div></div><div></div><div></div><div></div><div></div></div>                                |                          |                                                                                                                             |
| General Product Approval                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                          | For use in hazardous locations                                                                                              |
| <div><div><div>EG-Konf.</div></div><div></div><div><div>ATEX</div></div><div><div>IECEx</div></div></div>                                                                                                                                      |                          | <div><div><a href="#">Type Test Certificates/Test Report</a></div><div><a href="#">Special Test Certificate</a></div></div> |
| Maritime application                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          | other                                                                                                                       |
| <div><div><div>ABS</div></div><div><div>BUREAU<br/>VERITAS</div></div><div><div>DNV</div></div><div><div>RINA</div></div><div><div>RMRS</div></div></div> |                          | <div><div><a href="#">Miscellaneous</a></div></div>                                                                         |
| other                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Railway                  |                                                                                                                             |



#### Further information

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1011-1BA10-Z X95>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1011-1BA10-Z X95>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**


[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV1011-1BA10-Z X95&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1011-1BA10-Z X95&lang=en)

**Cax online generator**

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1011-1BA10-Z X95>

**Characteristic curves**

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

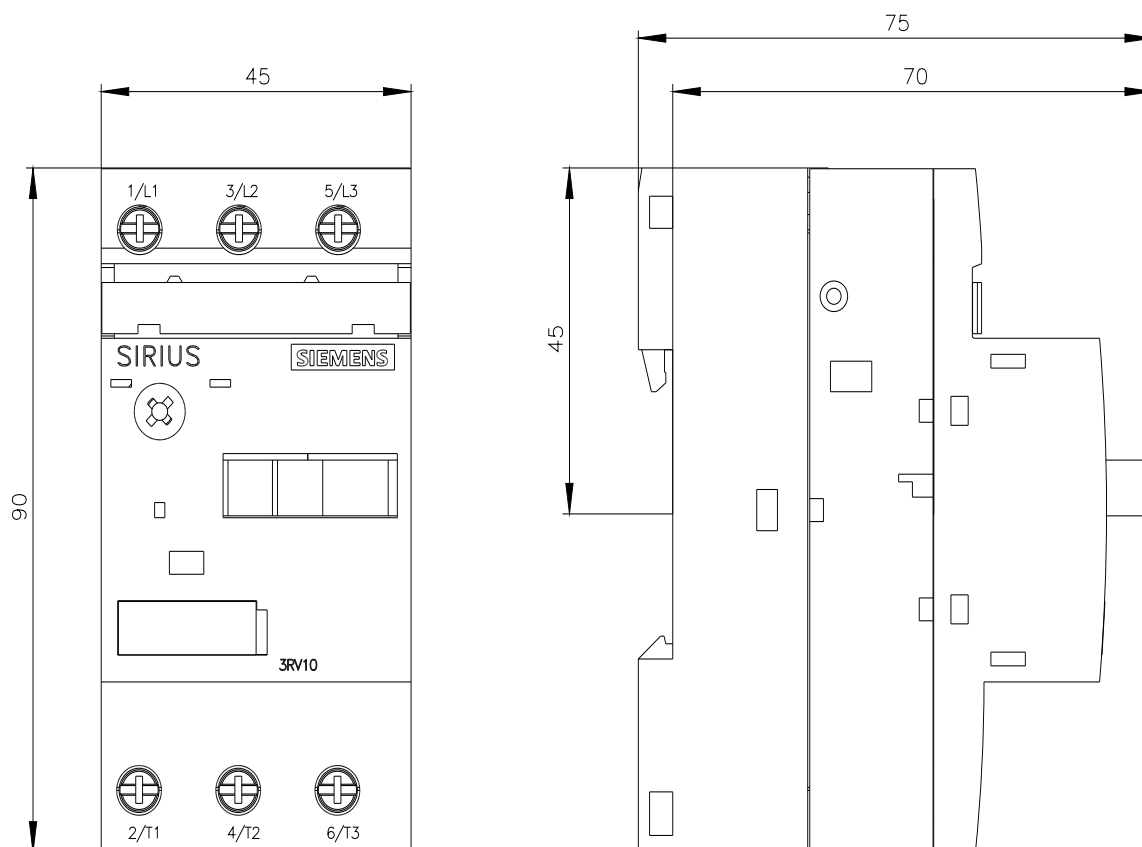



last modified:

5/5/2026 