



SIRIUS soft starter S0 25 A, 15 kW/500 V, 40 °C 400-600 V AC, 110-230 V AC/DC  
Screw terminals

| General technical data   |                          |
|--|--------------------------|
| product brand name   | SIRIUS                   |
| product designation  | Soft starter             |
| product feature  |                          |
| • integrated bypass contact system   | Yes                      |
| • thyristors   | Yes                      |
| product function   |                          |
| • intrinsic device protection  | Yes                      |
| • motor overload protection  | Yes                      |
| • evaluation of thermistor motor protection  | No                       |
| • external reset   | Yes                      |
| • adjustable current limitation  | Yes                      |
| • inside-delta circuit   | No                       |
| product component motor brake output   | No                       |
| insulation voltage rated value   | 600 V                    |
| degree of pollution  | 3, acc. to IEC 60947-4-2 |
| blocking voltage of the thyristor maximum  | 1 600 V                  |
| reference code according to EN 61346-2   | Q                        |
| reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750 | G                        |
| Power Electronics  |                          |
| operational current  |                          |
| • at 40 °C rated value   | 25 A                     |
| • at 50 °C rated value   | 23 A                     |
| • at 60 °C rated value   | 21 A                     |
| yielded mechanical performance for 3-phase motors  |                          |
| • at 400 V   |                          |
| — at standard circuit at 40 °C rated value   | 11 kW                    |
| • at 500 V   |                          |
| — at standard circuit at 40 °C rated value   | 15 kW                    |
| operating frequency rated value  | 50 ... 60 Hz             |
| relative negative tolerance of the operating frequency                                     | -10 %                    |
| relative positive tolerance of the operating frequency                                     | 10 %                     |
| operating voltage at standard circuit rated value  | 400 ... 600 V            |
| relative negative tolerance of the operating voltage at standard circuit                   | -15 %                    |
| relative positive tolerance of the operating voltage at                                    | 10 %                     |

|   |   |
|---|---|
| <b>standard circuit</b>   |   |
| <b>minimum load [%]</b>   | 20 %  |
| <b>adjustable motor current for motor overload protection minimum rated value</b>                                     | 10 A  |
| <b>continuous operating current [% of I<sub>e</sub>] at 40 °C</b>   | 115 %   |
| <b>power loss [W] at operational current at 40 °C during operation typical</b>  | 8 W   |
| <b>Control circuit/ Control</b>   |   |
| <b>type of voltage of the control supply voltage</b>  | AC/DC   |
| <b>control supply voltage frequency 1 rated value</b>   | 50 Hz   |
| <b>control supply voltage frequency 2 rated value</b>   | 60 Hz   |
| <b>relative negative tolerance of the control supply voltage frequency</b>  | -10 %   |
| <b>relative positive tolerance of the control supply voltage frequency</b>  | 10 %  |
| <b>control supply voltage 1 at AC at 50 Hz</b>  | 110 ... 230 V   |
| <b>control supply voltage 1 at AC at 60 Hz</b>  | 110 ... 230 V   |
| <b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b>                                       | -15 %   |
| <b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b>                                       | 10 %  |
| <b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b>                                       | -15 %   |
| <b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b>                                       | 10 %  |
| <b>control supply voltage 1 at DC</b>   | 110 ... 230 V   |
| <b>relative negative tolerance of the control supply voltage at DC</b>  | -15 %   |
| <b>relative positive tolerance of the control supply voltage at DC</b>  | 10 %  |
| <b>display version for fault signal</b>   | red   |
| <b>Mechanical data</b>  |   |
| <b>size of engine control device</b>  | S0  |
| <b>width</b>  | 45 mm   |
| <b>height</b>   | 125 mm  |
| <b>depth</b>  | 155 mm  |
| <b>fastening method</b>   | screw and snap-on mounting  |
| <b>mounting position</b>  | With additional fan: With vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t |
| <b>required spacing with side-by-side mounting</b>  |   |
| • upwards   | 60 mm   |
| • at the side   | 15 mm   |
| • downwards   | 40 mm   |
| <b>wire length maximum</b>  | 300 m   |
| <b>number of poles for main current circuit</b>   | 3   |
| <b>Connections/ Terminals</b>   |   |
| <b>type of electrical connection</b>  |   |
| • for main current circuit  | screw-type terminals  |
| • for auxiliary and control circuit   | screw-type terminals  |
| <b>number of NC contacts for auxiliary contacts</b>   | 0   |
| <b>number of NO contacts for auxiliary contacts</b>   | 2   |
| <b>number of CO contacts for auxiliary contacts</b>   | 1   |
| <b>type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point</b> |   |
| • solid   | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), max. 1x 10 mm <sup>2</sup>  |
| • finely stranded with core end processing  | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )  |
| <b>type of connectable conductor cross-sections for AWG cables for main contacts for box terminal</b>                 |   |
| • using the front clamping point  | 1x 8, 2x (16 ... 10)  |
| <b>type of connectable conductor cross-sections for auxiliary contacts</b>  |   |

|   |                                   |
|---|-----------------------------------|
| <ul style="list-style-type: none"> <li>• solid</li> </ul>   | 2x (0.5 ... 2.5 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>• finely stranded with core end processing</li> </ul>                        | 2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| <b>type of connectable conductor cross-sections for AWG cables</b>  |                                   |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>  | 2x (20 ... 14)                    |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts finely stranded with core end processing</li> </ul> | 2x (20 ... 16)                    |

|   |   |
|---|---|
| <b>Ambient conditions</b>   |   |
| <b>installation altitude at height above sea level</b>                                      | 5 000 m   |
| <b>environmental category</b>   |   |
| <ul style="list-style-type: none"> <li>• during transport according to IEC 60721</li> </ul> | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)   |
| <ul style="list-style-type: none"> <li>• during storage according to IEC 60721</li> </ul>   | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4       |
| <ul style="list-style-type: none"> <li>• during operation according to IEC 60721</li> </ul> | 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| <b>ambient temperature</b>  |   |
| <ul style="list-style-type: none"> <li>• during operation</li> </ul>                        | -25 ... +60 °C  |
| <ul style="list-style-type: none"> <li>• during storage</li> </ul>                          | -40 ... +80 °C  |
| <b>derating temperature</b>   | 40 °C   |
| <b>protection class IP on the front according to IEC 60529</b>                              | IP20  |
| <b>touch protection on the front according to IEC 60529</b>                                 | finger-safe, for vertical contact from the front  |

|  |             |
|--|-------------|
| <b>UL/CSA ratings</b>  |             |
| <b>yielded mechanical performance [hp] for 3-phase AC motor</b>  |             |
| <ul style="list-style-type: none"> <li>• at 460/480 V</li> </ul> |             |
| — at standard circuit at 50 °C rated value                       | 15 hp       |
| <ul style="list-style-type: none"> <li>• at 575/600 V</li> </ul> |             |
| — at standard circuit at 50 °C rated value                       | 20 hp       |
| <b>contact rating of auxiliary contacts according to UL</b>      | B300 / R300 |

|  |           |
|--|-----------|
| <b>Approvals Certificates</b>  |           |
| Environmental Product Declaration  |           |
| <ul style="list-style-type: none"> <li>• global warming potential [CO2 eq] / during manufacturing</li> </ul> | 4.24 kg   |
| <ul style="list-style-type: none"> <li>• global warming potential [CO2 eq] / during sales</li> </ul>         | 0.207 kg  |
| <ul style="list-style-type: none"> <li>• global warming potential [CO2 eq] / during operation</li> </ul>     | 117 kg    |
| <ul style="list-style-type: none"> <li>• global warming potential [CO2 eq] / after end of life</li> </ul>    | -0.229 kg |
| <ul style="list-style-type: none"> <li>• global warming potential [CO2 eq] / total</li> </ul>                | 121 kg    |

|                    |                                 |
|--------------------|---------------------------------|
| <b>Environment</b> | <b>General Product Approval</b> |
|--------------------|---------------------------------|

[Environmental Confirmations](#)



|                                 |            |                                       |
|---------------------------------|------------|---------------------------------------|
| <b>General Product Approval</b> | <b>EMV</b> | <b>For use in hazardous locations</b> |
|---------------------------------|------------|---------------------------------------|



|                          |                             |              |
|--------------------------|-----------------------------|--------------|
| <b>Test Certificates</b> | <b>Maritime application</b> | <b>other</b> |
|--------------------------|-----------------------------|--------------|

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



[Confirmation](#)

|              |                |
|--------------|----------------|
| <b>other</b> | <b>Railway</b> |
|--------------|----------------|



## Further information

## Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

## Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

## Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

## Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

## Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4026-1BB15>

## Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4026-1BB15>

## Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4026-1BB15>

## Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW4026-1BB15&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4026-1BB15&lang=en)

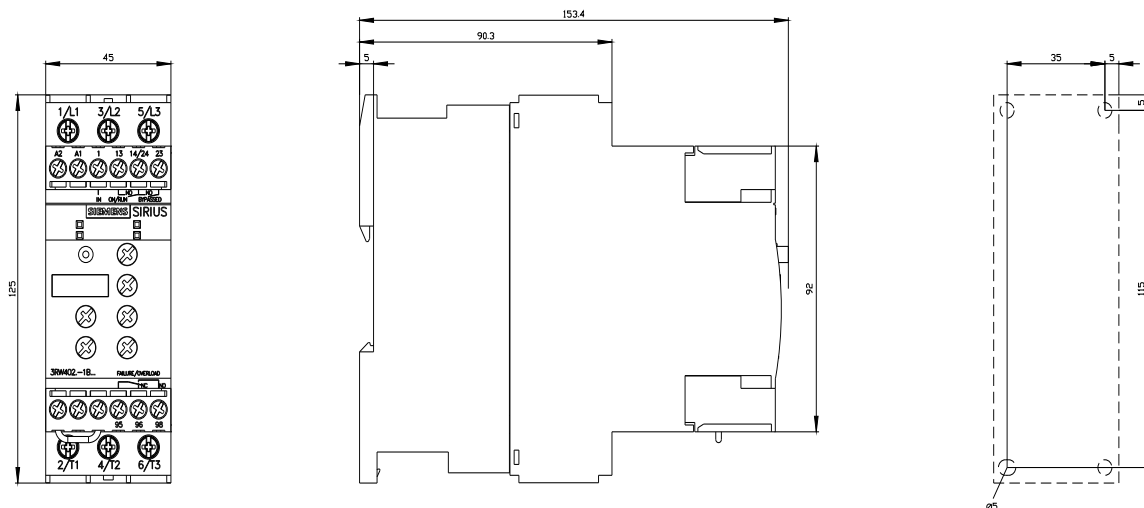



last modified:

4/1/2025 