



NEW

Ultracompact, Ultrathin Photoelectric Sensors with Built-in Amplifiers

E3T Series




The Improved E3T Series

Makes Mounting and Installation Simpler and Smoother

Suitable for Applications in the Rechargeable Battery Industry

Small Cylindrical Sensors

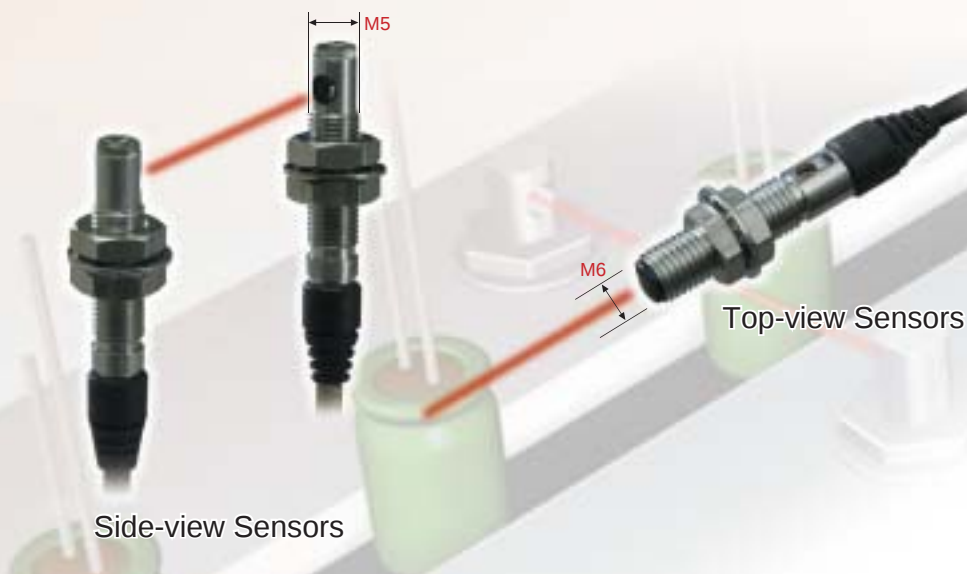

M3-mounting Sensors



realizing

Simple, Low-cost Installation, Setup, and Operation

New Small Cylindrical Sensors

Installation

With Square Sensors:

- Time is required to tighten screws.
- Mounting brackets are sometimes required.

But with Small Cylindrical Sensors:

Less Drilling and Tightening Work.


Work is reduced because holes do not need to be threaded and there is only one place to tighten.

AND

Mounting without Brackets.


For Through-beam Sensors, both Top-view and Side-view Models are available. Select the shape according to installation conditions to mount directly to the system without brackets.

Square Sensor
Threaded holes are required in two locations.

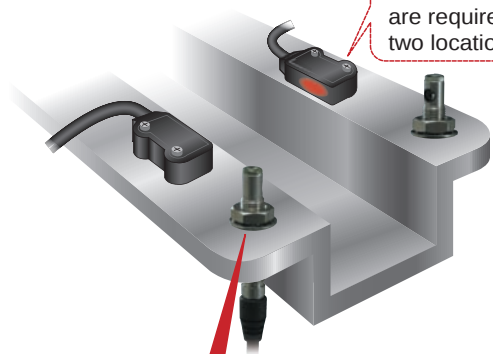

Side-view Sensor Mounted to Horizontal Surface

Top-view Sensor Mounted to Vertical Surface

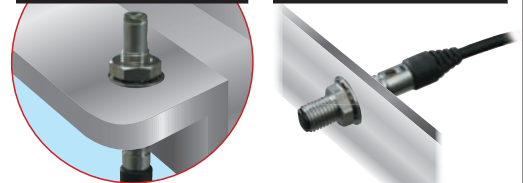

Drilling and tightening are required in only one location. Brackets are not required and cable routing is simplified.

Sure Installation without Stress

Side-view and Flat Sensor Models for M3 Mounting

Installation

With Previous M3-mounting Sensors:

- Sensor heads were large.

With Previous M2-mounting Sensors:

- The small screws were hard to handle.

With M3-mounting Sensors:

Compact M3 Mounting. Essentially the Same Size as M2-mounting Sensors.

The width and depth are essentially the same as previous M2-mounting sensors. Easier application without increasing space requirements.


AND

Secure Tightening and Mounting. Stainless-steel Mounting Plates or Sleeves

Side-view Sensors mount with SUS304 sleeves, while Flat Sensors mount with SUS304 plates. The reliable strength provide sure tightening that will not come loose. Damage from overtightening is also prevented for sure mounting.



The flat sensing surface is maintained even with larger screws.




The screw heads do not protrude.



Small Cylindrical Sensors

With Fiber Sensors:

- Installation** Space is required for the Amplifier.
- Setup** Setup and installation are troublesome.
- Operation** Initial and electrical costs are high.

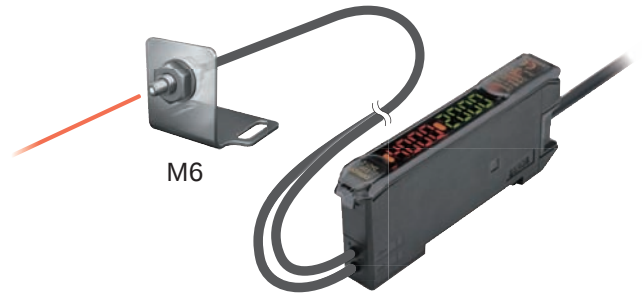


But with Small Cylindrical Sensors:

**Essentially the Same Size as the Fiber Head.
But No Amplifier Is Required.**


Mounting is possible in narrow spaces where only fiber sensors could previously be used. The built-in amplifier and teach-free operation reduce wiring and setup work. And initial costs and electrical costs are also reduced.

Diffuse-reflective Sensors
(with Sensitivity Adjuster)

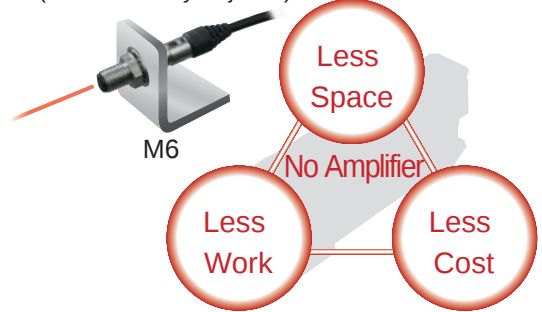

Overall Features

Many Compact Shapes for Various Applications

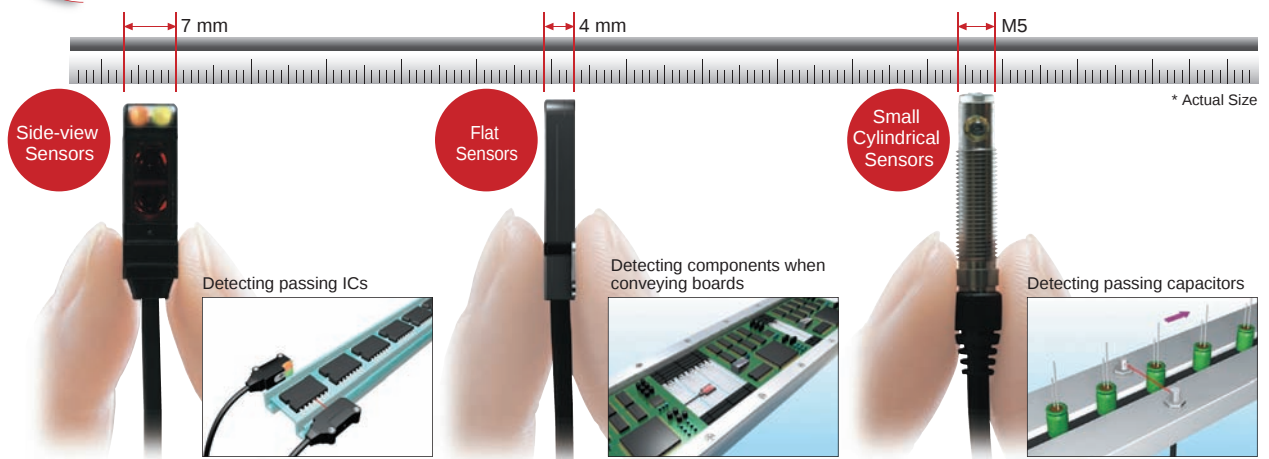

Ideal for Rechargeable Battery Manufacturing Lines



All Metal Parts Are Stainless Steel. No Worries About Conductive Copper Intrusion.

The case, nuts, and washers of the Cylindrical Sensors are all stainless steel, as are the mounting plates and sleeves of the M3-mounting Sensors. Harmful copper, zinc, and nickel plating are not used, enabling reliable application in rechargeable battery manufacturing lines. Stainless-steel screws are also available, for immediate application for rechargeable batteries.




■ Ordering Information

NEW Small Cylindrical Sensors


Sensing method	Appearance	Connection method	Sensing distance	Operation mode	Model	
					NPN output	PNP output
Through-beam		Pre-wired (2 m)	1 m	Dark-ON	E3T-CT12 2M	E3T-CT14 2M
			500 mm	Dark-ON	E3T-CT22S 2M	E3T-CT24S 2M
Diffuse-reflective (with adjuster)			3 to 50 mm	Light-ON	E3T-CD11 2M	E3T-CD13 2M

■ Dimensions (Unit: mm)


Top-view Through-beam Sensors

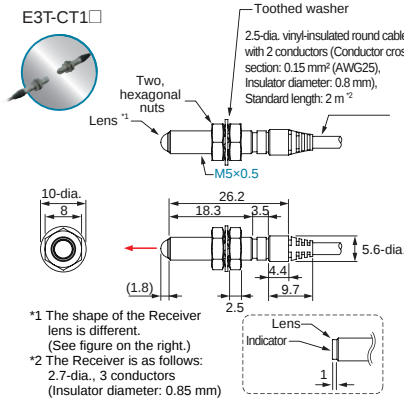

Side-view Through-beam Sensors




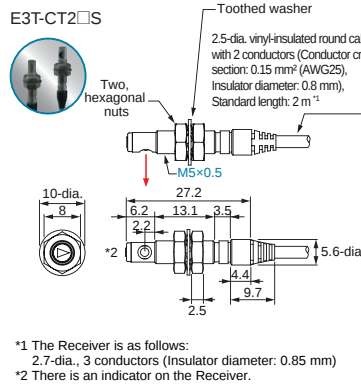


Top-view Diffuse-reflective Sensors

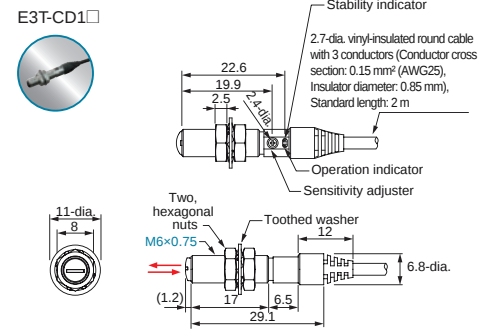

* Recommended Mounting Hole: M5 Through-beam Sensors: 5.5^{+0.5}₀, M6 Diffuse-reflective Sensors: 6.5^{+0.5}₀


NEW M3-mounting Sensors

Sensing method	Appearance	Connection method	Sensing distance	Operation mode	Model	
					NPN output	PNP output
Through-beam *1		Pre-wired (2 m)		Light-ON	E3T-ST11M 2M	E3T-ST13M 2M
				Dark-ON	E3T-ST12M 2M	E3T-ST14M 2M
				Light-ON	E3T-ST21M 2M	E3T-ST23M 2M
				Dark-ON	E3T-ST22M 2M	E3T-ST24M 2M
Diffuse-reflective				Light-ON	E3T-FD11M 2M	E3T-FD13M 2M
				Dark-ON	E3T-FD12M 2M	E3T-FD14M 2M
Convergent-reflective				Light-ON	E3T-SL11M 2M	E3T-SL13M 2M
				Dark-ON	E3T-SL12M 2M	E3T-SL14M 2M
				Light-ON	E3T-SL21M 2M	E3T-SL23M 2M
				Dark-ON	E3T-SL22M 2M	E3T-SL24M 2M


*1. The model number of the Emitter is expressed by adding an "L" to the set model number in the table. Example: E3T-ST11-L 2M
The model number of the Receiver is expressed by adding a "D" to the set model number in the table. Example: E3T-ST11-D 2M
Orders for individual Emitters and Receivers are accepted. (Modifications are required for some models.)

■ Dimensions (Unit: mm)


Side-view Through-beam Sensors

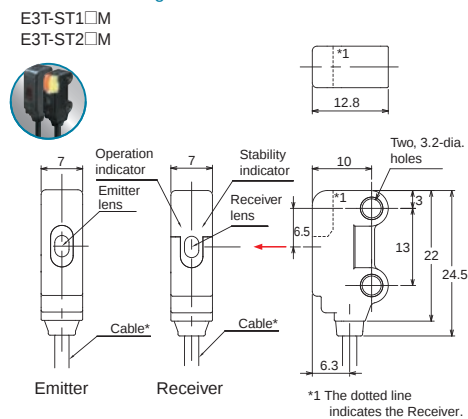

Flat Diffuse-reflective Sensors

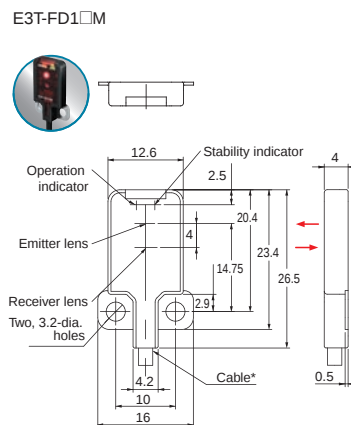

Side-view Convergent-reflective Sensors

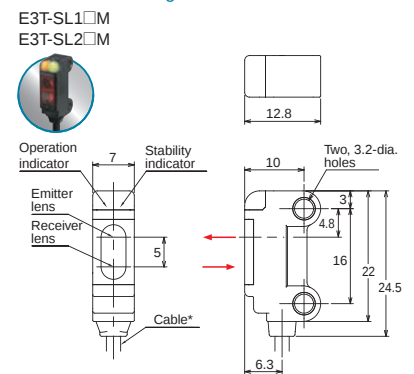

* 2.4-dia. vinyl-insulated round cable with 2 or 3 conductors (Conductor cross section: 0.1 mm² (AWG27), Insulator diameter: 0.7 mm), Standard length: 2 m

■ Accessories

These accessories are not included with the Sensor. Order them separately if required.

Name		Applicable Sensor	Model	Quantity	Remarks
Slits for Through-beam Side-view Sensors	0.5 dia.	E3T-ST1□M	E39-S76A	One each for Emitter and Receiver (2)	Sensing distance 100 mm
	1 dia.		E39-S76B		Sensing distance 300 mm
M3 Mounting Bracket for Side-view Sensors *		E3T-S□□□M	E39-L166	1	Nut plate provided
M3 Mounting Bracket for Flat Sensors		E3T-FD□□M	E39-L167		---
M3 Back-mounting Spacer for Flat Sensors		E3T-FD□□M	E39-L168	1	Use this Spacer when mounting a Sensor from the back.
M3 SUS304 Screw Set for Flat Sensors		E3T-FD□□M	E39-L170	Two bolts with hexagonal hole (M3×6)	---
M3 SUS304 Screw Set for Side-view Sensors *		E3T-S□□□M	E39-L171	Two each of the following: Bolt with hexagonal hole (M3×15), Hexagonal nuts, Spring washers, Flat washers	---
M2 SUS304 Screw Set for Flat Sensors *		E3T-F□□□	E39-L172	Two bolts with hexagonal hole (M2×6)	The screw set that is provided with the Sensor is zinc-plated steel. Use this SUS Screw Set when stainless steel is required.
M2 SUS304 Screw Set for Side-view Sensors *		E3T-S□□□	E39-L173	Two each of the following: Bolt with hexagonal hole (M2×12), Hexagonal nuts, Spring washers, Flat washers	

* For a Through-beam Sensor, order one Bracket or Screw Set for the Emitter and one for the Receiver.

■ Ratings and Specifications

Sensing method		Through-beam				Diffuse-reflective		Convergent-reflective	
Appearance		Side-view		Cylindrical type		Cylindrical type	Flat	Side-view	
				Top-view	Side-view	Top-view			
NPN	Light-ON	E3T-ST11M	E3T-ST21M	---	---	E3T-CD11	E3T-FD11M	E3T-SL11M	E3T-SL21M
	Dark-ON	E3T-ST12M	E3T-ST22M	E3T-CT12	E3T-CT22S	---	E3T-FD12M	E3T-SL12M	E3T-SL22M
PNP	Light-ON	E3T-ST13M	E3T-ST23M	---	---	E3T-CD13	E3T-FD13M	E3T-SL13M	E3T-SL23M
	Dark-ON	E3T-ST14M	E3T-ST24M	E3T-CT14	E3T-CT24S	---	E3T-FD14M	E3T-SL14M	E3T-SL24M
Sensing distance		1 m	300 mm	1 m	500 mm	3 to 50 mm (100 × 100 mm white paper)	5 to 30 mm (50 × 50 mm white paper)	5 to 15 mm (50 × 50 mm white paper)	5 to 30 mm (50 × 50 mm white paper)
Standard sensing object		Opaque, 2-mm dia. min.		Opaque, 4-mm dia. min.	Opaque, 5-mm dia. min.	---			
Minimum detectable object (typical)		Opaque, 2-mm dia.		---		---	0.15-mm dia. (sensing distance 10 mm)		
Hysteresis (white paper)		---				15% or less of the sensing distance	6 mm max.	2 mm max.	6 mm max.
Directional angle		Emitter: 2 to 20°, Receiver: 2 to 70°		Receiver: 2°	Receiver: 10°	---			
Light source (wavelength)		Red LED (650 nm)		Red LED (630 nm)	Red LED (625 nm)	Infrared LED (870 nm)	Red LED (650 nm)		
Power supply voltage		12 to 24 VDC ±10%, ripple (p-p) 10% max.							
Current consumption		30 mA max.(Emitter: 10 mA max., Receiver: 20 mA max.)		30 mA max. (Emitter: 15 mA max., Receiver: 15 mA max.)		20 mA max.			
Control output		Load power supply voltage: 26.4 VDC max. Load current: 50 mA max. (residual voltage: 2 V max. for load current of 10 to 50 mA 1 V max. for load current of less than 10 mA), Open-collector output		Load power supply voltage: 30 VDC max. Load current: 80 mA max. (residual voltage: 1 V max.) Open-collector output			Load power supply voltage: 26.4 VDC max. Load current: 50 mA max. (residual voltage: 2 V max. for load current of 10 to 50 mA, 1 V max. for load current of less than 10 mA), Open-collector output		
Protection circuits		Power supply and control output reverse polarity protection Output short-circuit protection		Power supply reverse polarity protection Output short-circuit protection			Power supply and control output reverse polarity protection Output short-circuit protection Mutual interference prevention		
Response time		Operate or reset: 1 ms max.		Operate or reset: 0.5 ms max.			Operate or reset: 1 ms max		
Ambient illumination		Incandescent lamp: 5,000 lx max.		Incandescent lamp: 3,000 lx max.			Incandescent lamp: 5,000 lx max.		
Ambient temperature range		Operating: -25 to +55°C Storage: -40 to +70°C (with no icing or condensation)		Operating: -25 to +55°C Storage: -30 to +70°C (with no icing or condensation)			Operating: -25 to +55°C Storage: -40 to +70°C (with no icing or condensation)		
Ambient humidity range		Operating: 35% to 85% Storage: 35% to 95% (with no condensation)		Operating or Storage: 35% to 85% (with no condensation)			Operating: 35% to 85% Storage: 35% to 95% (with no condensation)		
Insulation resistance		20 MΩ min. at 500 VDC							
Dielectric strength		1,000 VAC, 50/60 Hz for 1 min.		500 VAC, 50/60 Hz for 1 min.			1,000 VAC, 50/60 Hz for 1 min.		
Vibration resistance (destruction)		10 to 2,000 Hz, 1.5-mm double amplitude or 300 m/s ² for 0.5 hours each in X, Y, and Z directions		10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			10 to 2,000 Hz, 1.5-mm double amplitude or 300 m/s ² for 0.5 hours each in X, Y, and Z directions		
Shock resistance (destruction)		1,000 m/s ² 3 times each in X, Y, and Z directions		500 m/s ² 3 times each in X, Y, and Z directions			1,000 m/s ² 3 times each in X, Y, and Z directions		
Degree of protection		IP67 (IEC 60529)		IP65 (IEC 60529)			IP67 (IEC 60529)		
Connection method		Pre-wired (standard length: 2 m)							
Weight		Approx. 40 g		Approx. 60 g		Approx. 40 g	Approx. 20 g		
Materials	Case	PBT (polybutylene terephthalate)		SUS303		PBT (polybutylene terephthalate)			
	Display window	Denatured polyarylate		Polysulfone		Epoxy	Denatured polyarylate		
	Lens	Denatured polyarylate		Polysulfone		Denatured polyarylate			
Accessories		Instruction manual ^{*1}		Instruction manual Hexagonal nuts ^{*3} Toothed washers ^{*3}		Instruction manual Hexagonal nuts ^{*4} Toothed washers ^{*4} Adjustment driver ^{*5}	Instruction manual ^{*2}	Instruction manual ^{*1}	

^{*1} Order the E39-L171 Screw Set separately if required.

^{*2} Order the E39-L170 Screw Set separately if required.

^{*3} A E39-M5 SUS Nut Set is included with the Sensor, but it can also be ordered separately.

^{*4} A E39-M6 SUS Nut Set is included with the Sensor, but it can also be ordered separately.

^{*5} A E39-G17 Adjustment Driver is included with the Sensor, but it can also be ordered separately.

■ Ordering Information

Previous Sensors E3T-series Sensors, M2-mounting Sensors

 Red light

Sensing method	Appearance	Connection method	Sensing distance	Operation mode	Model	
					NPN output	PNP output
Through-beam (Emitter + Receiver) *1		Pre-wired (2 m)	1 m (Sensitivity Adjustment Unit can be used.)	Light-ON	E3T-ST11 2M	E3T-ST13 2M
			Dark-ON	E3T-ST12 2M	E3T-ST14 2M	
			300 mm	Light-ON	E3T-ST21 2M	E3T-ST23 2M
			Dark-ON	E3T-ST22 2M	E3T-ST24 2M	
			500 mm	Light-ON	E3T-FT11 2M	E3T-FT13 2M
			Dark-ON	E3T-FT12 2M	E3T-FT14 2M	
			300 mm	Light-ON	E3T-FT21 2M	E3T-FT23 2M
			Dark-ON	E3T-FT22 2M	E3T-FT24 2M	
Retro-reflective			Using the E39-R4 Reflector provided 200 mm [30 mm] *2	Light-ON	E3T-SR41 2M *3	E3T-SR43 2M *3
			Using the E39-R37-CA 100 mm [10 mm] *2	Dark-ON	E3T-SR42 2M *3	E3T-SR44 2M *3
Diffuse-reflective			5 to 30 mm	Light-ON	E3T-FD11 2M	E3T-FD13 2M
				Dark-ON	E3T-FD12 2M	E3T-FD14 2M
Convergent-reflective			5 to 15 mm	Light-ON	E3T-SL11 2M	E3T-SL13 2M
				Dark-ON	E3T-SL12 2M	E3T-SL14 2M
			5 to 30 mm	Light-ON	E3T-SL21 2M	E3T-SL23 2M
				Dark-ON	E3T-SL22 2M	E3T-SL24 2M
BGS-reflective			1 to 15 mm	Light-ON	E3T-FL11 2M	E3T-FL13 2M
				Dark-ON	E3T-FL12 2M	E3T-FL14 2M
			1 to 30 mm	Light-ON	E3T-FL21 2M	E3T-FL23 2M
				Dark-ON	E3T-FL22 2M	E3T-FL24 2M

*1. The model number of the Emitter is expressed by adding an "L" to the set model number in the table. Example: E3T-ST11-L 2M

The model number of the Receiver is expressed by adding a "D" to the set model number in the table. Example: E3T-ST11-D 2M

Orders for individual Emitters and Receivers are accepted. (Modifications are required for some models.)

*2. Values in parentheses indicate the minimum required distance between the Sensor and Reflector.

*3. Models are available either with or without the E39-R37-CA Reflector included.

Models with E39-R37-CA Reflector. E3T-SR4□-S Models without Reflector. E3T-SR4□-C

Note: The mounting holes on M2-mounting Sensors are SUS301 stainless steel.

Terms and Conditions of Sale

- Offer; Acceptance.** These terms and conditions (these "Terms") are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "Products") by Omron Electronics LLC and its subsidiary companies ("Omron"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
- Prices; Payment Terms.** All prices stated are current, subject to change without notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
- Discounts.** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
- Interest.** Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
- Orders.** Omron will accept no order less than \$200 net billing.
- Governmental Approvals.** Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
- Taxes.** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or indirectly by Omron for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron.
- Financial.** If the financial position of Buyer at any time becomes unsatisfactory to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
- Cancellation; Etc.** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses.
- Force Majeure.** Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
- Shipping; Delivery.** Unless otherwise expressly agreed in writing by Omron:
 - Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
 - Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
 - All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid;
 - Delivery and shipping dates are estimates only; and
 - Omron will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
- Claims.** Any claim by Buyer against Omron for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed.
- Warranties.** (a) **Exclusive Warranty.** Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) **Limitations.** OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) **Buyer Remedy.** Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See <http://www.omron247.com> or contact your Omron representative for published information.
- Limitation on Liability; Etc.** OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
- Indemnities.** Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
- Property; Confidentiality.** Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
- Export Controls.** Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (ii) sale of products to "forbidden" or other proscribed persons; and (iii) disclosure to non-citizens of regulated technology or information.
- Miscellaneous.** (a) **Waiver.** No failure or delay by Omron in exercising any right and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) **Assignment.** Buyer may not assign its rights hereunder without Omron's written consent. (c) **Law.** These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law principles). (d) **Amendment.** These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) **Severability.** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) **Setoff.** Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) **Definitions.** As used herein, "including" means "including without limitation"; and "Omron Companies" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

Certain Precautions on Specifications and Use

- Suitability of Use.** Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given:
 - Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
 - Use in consumer products or any use in significant quantities.
 - Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
 - Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product.
 NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
- Programmable Products.** Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.
- Performance Data.** Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
- Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
- Errors and Omissions.** Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.



OMRON ELECTRONICS LLC • THE AMERICAS HEADQUARTERS • Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766
www.omron247.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ELECTRONICS MEXICO SA DE CV • HEAD OFFICE

Apodaca, N.L. • 52.811.156.99.10 • 001.800.556.6766 • mela@omron.com

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

OMRON EUROPE B.V. Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. Tel: +31 (0) 23 568 13 00 Fax: +31 (0) 23 568 13 88 www.industrial.omron.eu