SIEMENS

Data sheet 5SM9122-6KK01

RC unit, 2-pole, type A, short-time delayed, In: 40 A, 10 mA, Un AC: 400 V

Model	
product brand name	SENTRON
product designation	RC unit electronic
design of the product	Short-time delayed
General technical data	
number of poles	2
degree of pollution	2
tripping fault current rated value	10 mA
Supply voltage	
value range of the supply voltage frequency	50 Hz
value range of the supply voltage at AC	230/400 V
Dissipation	
power loss [W]	
● for rated value of the current at AC in hot operating state per pole	0.8 W
Appearance	
RAL color number	7 035
RAL color number (similar)	7 035
Mechanical Design	
Net Weight	170 g
Approvals Certificates	

Environment		General Product Approval		
Environmental Confirmations	Environmental Confirmations	EAC	Confirmation	CE EG-Konf. UKCA

General Product Approval	other

CCC Confirmation 产品合格 QC PASS

Further information
Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage

Subject to change without notice
© Copyright Siemens

https://support.industry.siemens.com/cs/ww/en/view/109995012

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SM9122-6KK01

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/5SM9122-6KK01

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SM9122-6KK01

CAx-Online-Generator
https://www.siemens.com/cax

Tender specifications
https://www.siemens.com/specifications

Characteristic curves
https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP="HAUPT"></mmp_prod__no>

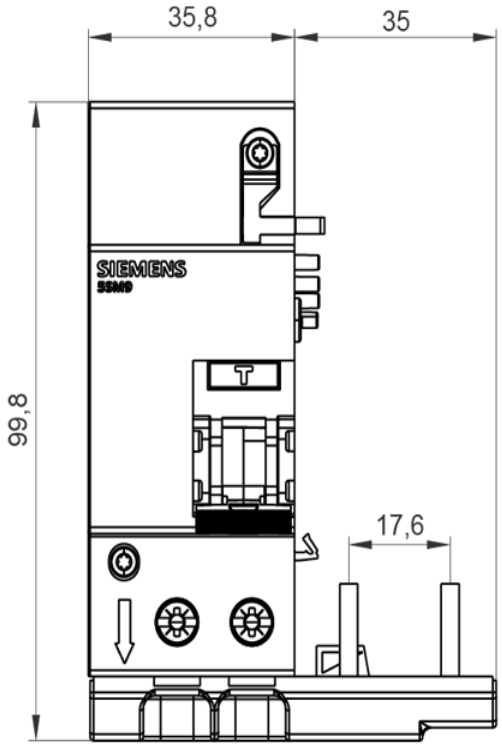

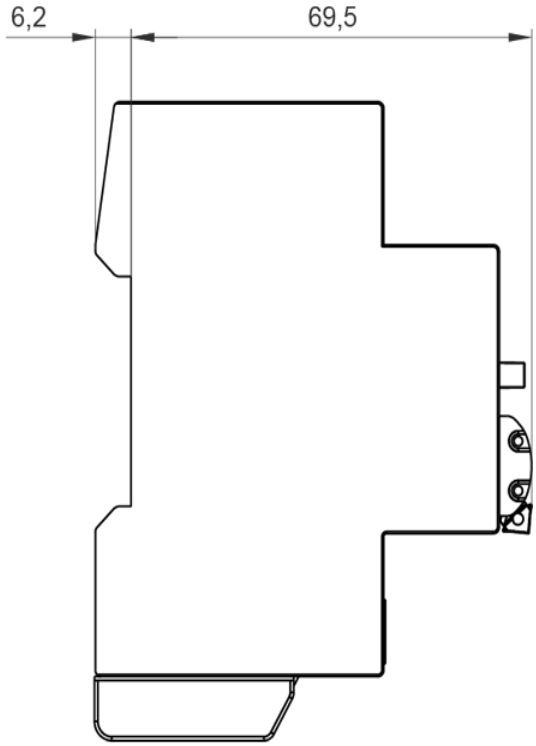

last modified: 10/9/2025

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens