

Product datasheet

Specifications



safety module, Harmony XPSU, Cat 4, expansion use with universal range, 24V AC or DC, spring

XPSUEP14AC

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Dimensions

Front and Side Views

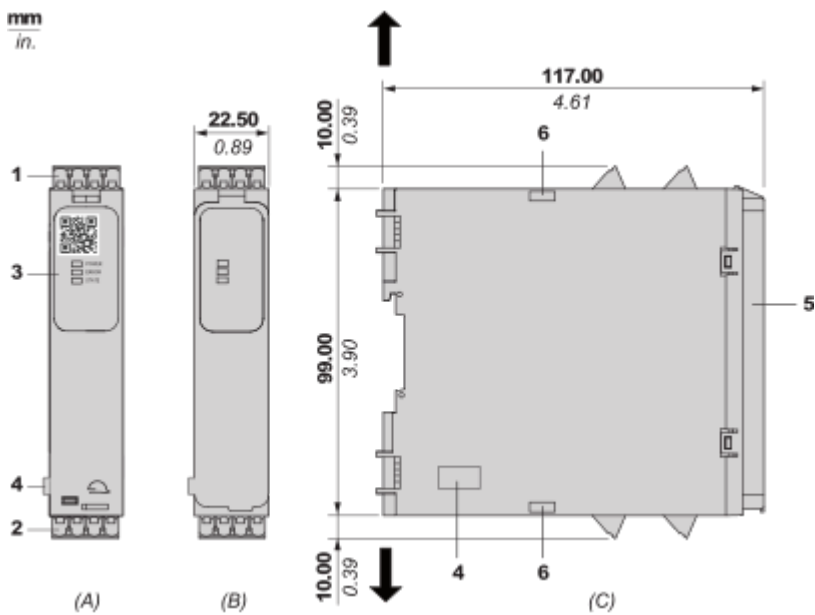


- (A) : Product drawing
(B) : Spring Terminal
(C) : Side view
(1) : Removable terminal blocks, top
(2) : Removable terminal blocks, bottom
(3) : LED indicators
(4) : Connector for base safety module
(5) : Sealable transparent cover
(6) : Position of clips for mounting to base safety module


mm in. 12.0 0.47					
mm ²	0,2...2,5	0,25...2,5	0,2...1,5	0,25...1	0,5...1,5
AWG	24...12	24...12	24...16	24...18	20...16

Mounting and Clearance

Mounting to DIN rail

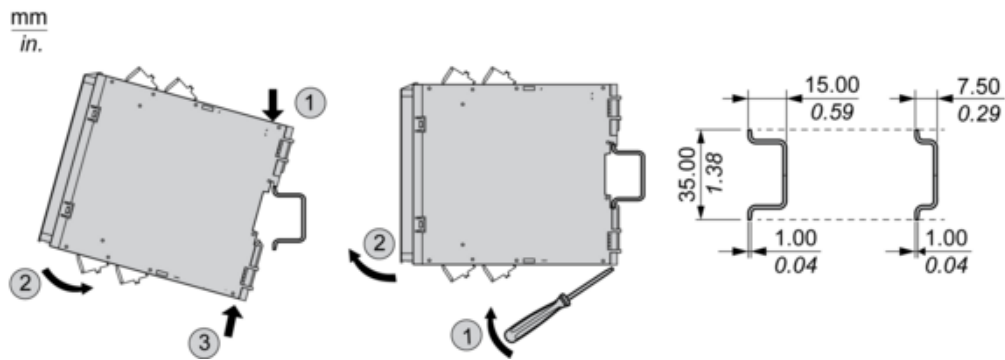


Screw-mounting

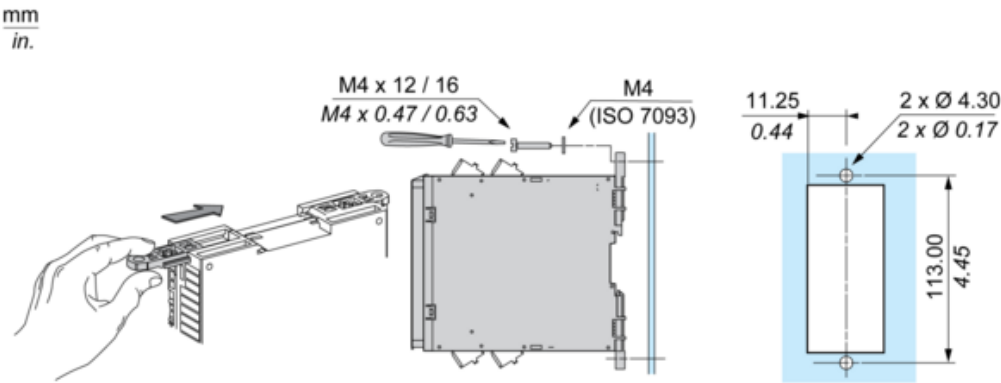

Connections and Schema

Wiring Drawing

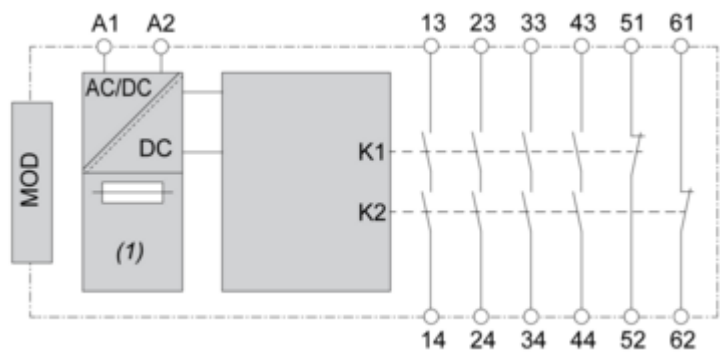

(1) : A1-A2 (Power supply)
13-23-33-43-51-61-14-24-34-44-52-62 : Output
MOD : Connector for base safety module