

SIPLUS S7-1500 sync submodule up to 200 m based on 6ES7960-1CB00-0AA5 with conformal coating, 0...+60 °C, for patch cable up to 200 m

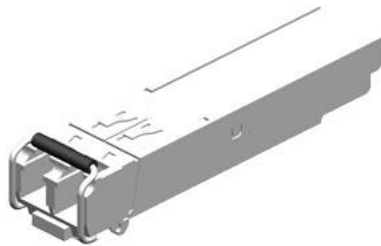


Figure similar

General information	
Product type designation	Synchronization module
based on	6ES7960-1CB00-0AA5
Engineering with	
<ul style="list-style-type: none"> STEP 7 TIA Portal configurable/integrated from version 	see entry ID: 109746275
Power loss	
Power loss, typ.	0.77 W
Interfaces	
Optical interface	Yes
<ul style="list-style-type: none"> design of optical connection 	LC
<ul style="list-style-type: none"> wavelength of optical interface 	850 nm
<ul style="list-style-type: none"> range (depending on optical fiber used), min. 	1 m
<ul style="list-style-type: none"> range (depending on optical fiber used), max. 	200 m
Ambient conditions	
Ambient temperature during operation	
<ul style="list-style-type: none"> horizontal installation, min. 	0 °C; = Tmin
<ul style="list-style-type: none"> horizontal installation, max. 	60 °C; = Tmax
<ul style="list-style-type: none"> vertical installation, min. 	0 °C; = Tmin
<ul style="list-style-type: none"> vertical installation, max. 	40 °C
Ambient temperature during storage/transportation	
<ul style="list-style-type: none"> min. 	-40 °C
<ul style="list-style-type: none"> max. 	70 °C
Altitude during operation relating to sea level	
<ul style="list-style-type: none"> Installation altitude above sea level, max. 	2 000 m
<ul style="list-style-type: none"> Ambient air temperature-barometric pressure-altitude 	Tmin ... Tmax at 1 140 hPa ... 795 hPa (-1 000 m ... +2 000 m)
Relative humidity	
<ul style="list-style-type: none"> With condensation, tested in accordance with IEC 60068-2-38, max. 	100 %; RH incl. condensation / frost (no commissioning in bedewed state), horizontal installation
Resistance	
Coolants and lubricants	
<ul style="list-style-type: none"> Resistant to commercially available coolants and lubricants 	Yes; Incl. diesel and oil droplets in the air
Use in stationary industrial systems	
<ul style="list-style-type: none"> to biologically active substances according to EN 60721-3-3 	Yes; Class 3B2 mold, fungus and dry rot spores (with the exception of fauna); Class 3B3 on request
<ul style="list-style-type: none"> to chemically active substances according to EN 60721-3-3 	Yes; Class 3C4 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
<ul style="list-style-type: none"> to mechanically active substances according to EN 60721-3-3 	Yes; Class 3S4 incl. sand, dust, *

Use on ships/at sea	
— to biologically active substances according to EN 60721-3-6	Yes; Class 6B2 mold, fungal and dry rot spores (excluding fauna)
— to chemically active substances according to EN 60721-3-6	Yes; Class 6C3 (RH < 75 %) incl. salt spray acc. to EN 60068-2-52 (severity degree 3); *
— to mechanically active substances according to EN 60721-3-6	Yes; Class 6S3 incl. sand, dust; *

Remark	
— Note regarding classification of environmental conditions acc. to EN 60721, EN 60654-4 and ANSI/ISA-71.04	* The supplied plug covers must remain in place over the unused interfaces during operation!

Conformal coating	
<ul style="list-style-type: none"> • Coatings for printed circuit board assemblies acc. to EN 61086 • Protection against fouling acc. to EN 60664-3 • Military testing according to MIL-I-46058C, Amendment 7 • Qualification and Performance of Electrical Insulating Compound for Printed Board Assemblies according to IPC-CC-830A 	<p>Yes; Class 2 for high reliability</p> <p>Yes; Type 1 protection</p> <p>Yes; Discoloration of coating possible during service life</p> <p>Yes; Conformal coating, Class A</p>

Dimensions	
Width	13 mm
Height	14 mm
Depth	58 mm

Weights	
Weight, approx.	18 g

Classifications			
		Version	Classification
	eClass	14	27-24-22-08
	eClass	12	27-24-22-08
	eClass	9.1	27-24-22-08
	eClass	9	27-24-22-08
	eClass	8	27-24-22-08
	eClass	7.1	27-24-22-08
	eClass	6	27-24-22-08
	ETIM	10	EC001423
	ETIM	9	EC001423
	ETIM	8	EC001423
	ETIM	7	EC001423
	IDEA	4	3564
	UNSPSC	15	32-15-17-05

Approvals / Certificates

General Product Approval

[Manufacturer Declaration](#)



[China RoHS](#)



[China RoHS](#)

General Product Approval



last modified:

6/24/2025