

# Product data sheet

Specifications



## Power relay, SE Relays, SPST-NO, 10A, 24 VDC, epoxy sealed

276AXXH-24D

 To be discontinued on: Mar 31, 2026

 To be end-of-service on: Jun 30, 2026

 Discontinued

Product availability: Stock - Normally stocked in distribution facility

### Main

|                     |             |
|---------------------|-------------|
| Product Type        | Power relay |
| Switch Function     | SPST        |
| Contact Composition | 1 NO        |

### Complementary

|                             |                                     |
|-----------------------------|-------------------------------------|
| Input Current               | 10 A                                |
| Contacts Material           | Silver alloy contacts               |
| Minimum Switching Current   | 100 mA                              |
| Coil Resistance             | 2880 Ohm                            |
| Input voltage               | 24 V DC                             |
| Drop-out Voltage Threshold  | $\geq 0.1 U_c$ DC                   |
| Rated Operational Current   | 10 A at 240 V AC<br>10 A at 30 V DC |
| Power consumption in W      | 0.2 W DC                            |
| Voltage Range               | 0.8...1.1 $U_n$ DC                  |
| Motor Power HP              | 0.17 hp 120 V AC                    |
| Connections Terminals       | pins for printed circuit board      |
| Protective Treatment        | Epoxy sealed                        |
| Electrical Insulation Class | Class E                             |
| Mounting                    | Printed circuit boards              |
| Height                      | 0.4 in (10 mm)                      |
| Width                       | 0.5 in (12.7 mm)                    |
| Depth                       | 0.81 in (20.49 mm)                  |
| Product Weight              | 0.2 oz (5.5 g)                      |
| Operating Time              | 10 ms                               |

### Environment

|                                       |                            |
|---------------------------------------|----------------------------|
| Ambient Air Temperature for Operation | -40...158 °F (-40...70 °C) |
| Ambient Air Temperature for Storage   | -40...185 °F (-40...85 °C) |
| Product Certifications                | UL                         |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                       |                                                                  |
|-----------------------|------------------------------------------------------------------|
| Electrical Durability | 100000 cycles                                                    |
| Mechanical Durability | 5000000 cycles                                                   |
| Dielectric Strength   | 2000 V AC between coil and contact<br>1000 V AC between contacts |
| Shock Resistance      | 20 gn in operation                                               |
| Vibration Resistance  | 1.5 gn 10...55 Hz)in operation                                   |

## Ordering and shipping details

|                   |               |
|-------------------|---------------|
| Category          | US10CP221127  |
| Discount Schedule | 0CP2          |
| GTIN              | 3606480276170 |
| Returnability     | Yes           |
| Country of origin | IN            |

## Packing Units

|                        |                     |
|------------------------|---------------------|
| Unit Type of Package 1 | PCE                 |
| Nbr. of units in pkg.  | 1                   |
| Package 1 Height       | 0.807 in (2.049 cm) |
| Package 1 Width        | 0.50 in (1.27 cm)   |
| Package 1 Length       | 0.53 in (1.35 cm)   |
| Package weight(Lbs)    | 0.2 oz (5.5 g)      |

## Contractual warranty

|                      |    |
|----------------------|----|
| Warranty (in months) | 18 |
|----------------------|----|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better

| Materials and Substances               |                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Packaging made with recycled cardboard | Yes                                                                                                                                                                                                                                                                                                                                                                    |
| Packaging without single use plastic   | No                                                                                                                                                                                                                                                                                                                                                                     |
| <a href="#">EU RoHS Directive</a>      | Pro-active compliance (Product out of EU RoHS legal scope)                                                                                                                                                                                                                                                                                                             |
| REACH Regulation                       | <a href="#">REACH Declaration</a>                                                                                                                                                                                                                                                                                                                                      |
| California proposition 65              | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |

### Use Longer


| Lifetime extension |    |
|--------------------|----|
| Repair             | No |

### Use Again

| Repack and remanufacture |    |
|--------------------------|----|
| Take-back                | No |

Connections and Schema

Connections and Wiring Diagrams

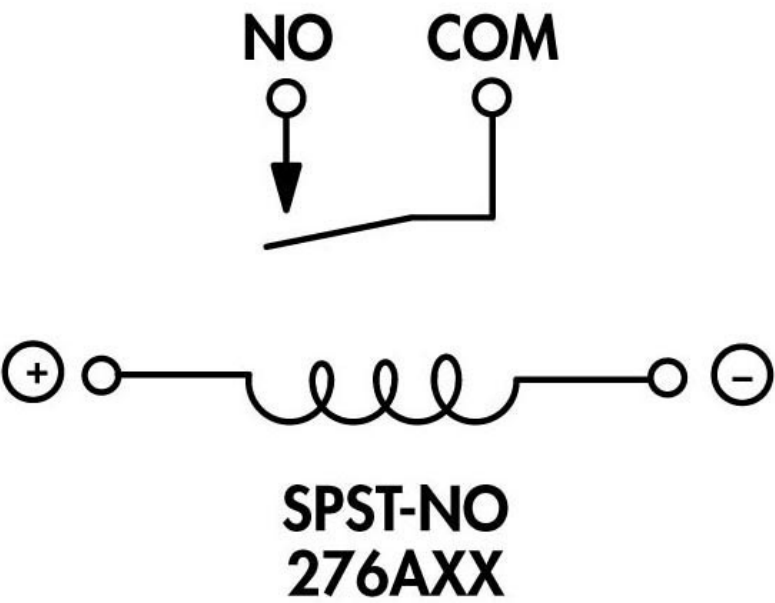

Connections and Wiring Diagrams

