

Product datasheet

Specifications



Unity processor - Transparent Ready - 8 racks (12 slots),16 racks (4/6/8 slots)

TSXP572634MC

⚠ Discontinued on: 17 Jul 2023

⚠ Discontinued

Main

Range of product	Modicon Premium Automation platform
Product or component type	Unity processor
Software designation	Unity Pro

Complementary

Concept	Transparent Ready
Number of racks	16 4/6/8 slots 8 12 slots
Number of slots	64 96 128
Discrete I/O processor capacity	1024 I/O
Analogue I/O processor capacity	80 I/O
Number of application specific channel	24
Number of process control channel	10 up to 30 simple loops
Integrated connection type	Ethernet TCP/IP RJ45 connector
Port Ethernet	10BASE-T/100BASE-TX
Communication module processor capacity	4 1
Memory description	Internal RAM (with PCMCIA card) 160 kB data Internal RAM (with PCMCIA card) 768 kB program Internal RAM (without PCMCIA card) 160 kB program and data PCMCIA card 16384 kB additional data storage
Maximum size of object areas	64 %KWi constant words located internal data 64 %MWi internal words located internal data 64 kB (DFB and EFB function blocks) unlocated internal data 64 kB (elementary and derived data) unlocated internal data 8132 %Mi located internal bits
Application structure	1 fast task 1 master task 64 event tasks
Execution time per instruction	0.19 µs Boolean without PCMCIA card 0.25 µs word or fixed-point arithmetic without PCMCIA card 1.75...2.6 µs floating points with PCMCIA card 1.75...2.6 µs floating points without PCMCIA card 0.21 µs Boolean with PCMCIA card 0.42 µs word or fixed-point arithmetic with PCMCIA card
Number of instructions per ms	2.53 Kinst/ms 65 % Boolean + 35 % fixed arithmetic with PCMCIA card 3.7 Kinst/ms 100 % Boolean with PCMCIA card 3.71 Kinst/ms 65 % Boolean + 35 % fixed arithmetic without PCMCIA card 4.76 Kinst/ms 100 % Boolean without PCMCIA card

Excluding VAT, FCA Jabal Ali & are subject to change – check with your local distributor.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

System overhead	0.3 ms for fast task 1 ms for master task
Marking	CE
Local signalling	1 LED (green) for Ethernet TCP/IP port ready (RUN) 1 LED (green) for processor running (RUN) 1 LED (red) for collision detection (COL) 1 LED (red) for Ethernet TCP/IP port fault (ERR) 1 LED (red) for I/O module or configuration fault (I/O) 1 LED (red) for processor or system fault (ERR) 1 LED (yellow) for activity on TER or AUX terminal port (TER) 1 LED (yellow) for Ethernet link diagnostics (STS) 1 LED (yellow) for reception activity (RX) 1 LED (yellow) for transmission activity (TX)
Current consumption	1650 mA at 5 V DC
Module format	Double
Net weight	0.042 kg

Environment

Standards	73/23/EEC CSA C22.2 No 213 Class I Division 2 Group C CSA C22.2 No 142 89/336/EEC 92/31/EEC CSA C22.2 No 213 Class I Division 2 Group B IEC 61131-2 CSA C22.2 No 213 Class I Division 2 Group D 93/68/EEC CSA C22.2 No 213 Class I Division 2 Group A UL 508
Product certifications	DNV GL RMRS ABS BV LR RINA
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...2000 m
Protective treatment	TC Conformal coating Humiseal 1A33
IP degree of protection	IP20
Pollution degree	2

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.5 cm
Package 1 Width	18.0 cm
Package 1 Length	26.0 cm
Package 1 Weight	754.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	4

Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	3.531 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

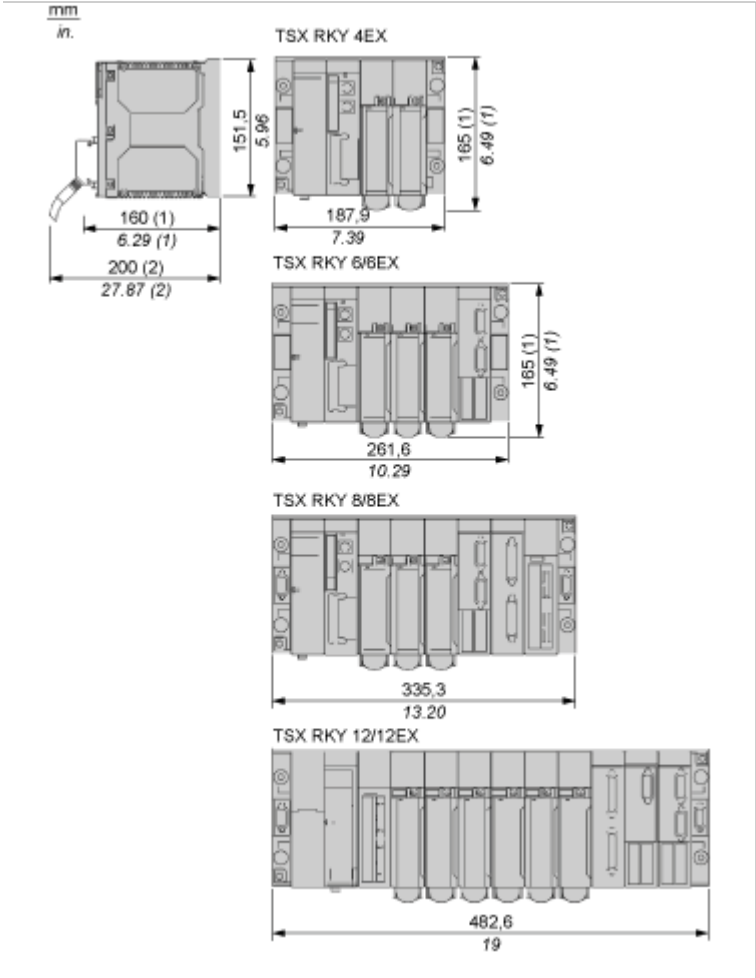

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.