

Product data sheet

Specifications



Control relay, TeSys K, 2 NO + 2 NC, It or eq to 690V, 48VDC low consumption coil

CA4KN22EW3

Product availability: Non-Stock - Not normally stocked in distribution facility

⚠ Discontinued

Main

Range	TeSys
Product name	TeSys CAK
Product or Component Type	Control relay
Device short name	CA4K
Contactor application	Control circuit
Utilisation category	DC-13 AC-15
Pole contact composition	2 NO + 2 NC
[Ue] rated operational voltage	<= 690 V <= 400 Hz
Control circuit type	DC low consumption
[Uc] control circuit voltage	48 V DC

Complementary

Coil technology	Built-in bidirectional peak limiting diode suppressor
[Ith] conventional free air thermal current	10 A (at 122 °F (50 °C))
Irms rated making capacity	110 A IEC 60947
Associated fuse rating	10 A gG conforming to IEC 60947 10 A gG conforming to VDE 0660
[Ui] rated insulation voltage	690 V IEC 60947 750 V VDE 0110 group C 690 V BS 5424 600 V CSA C22.2 No 14
Mounting Support	Plate Rail
Connections - terminals	screw clamp terminals 1 0.002...0.006 in² (1.5...4 mm²)solid screw clamp terminals 2 0.002...0.006 in² (1.5...4 mm²)solid screw clamp terminals 1 0.001...0.006 in² (0.75...4 mm²)flexible with cable end screw clamp terminals 2 0.001...0.006 in² (0.75...4 mm²)flexible without cable end screw clamp terminals 1 0.0005...0.002 in² (0.34...1.5 mm²)flexible with cable end screw clamp terminals 2 0.0005...0.002 in² (0.34...1.5 mm²)flexible without cable end
Tightening torque	11.5 lbf.in (1.3 N.m) screw clamp terminals flat Ø 6 mm 11.5 lbf.in (1.3 N.m) screw clamp terminals Philips No 2 0.2 in (6 mm) 11.5 lbf.in (1.3 N.m) screw clamp terminals pozidriv No 2
Control circuit voltage limits	Drop-out: 0.1...0.75 Uc (at <122 °F (50 °C)) Operational: 0.7...1.3 Uc (at <122 °F (50 °C))
Operating time	10...20 ms coil de-energisation and NO opening 15...25 ms coil de-energisation and NC closing 30...40 ms coil energisation and NO closing 25...35 ms coil energisation and NC opening

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Mechanical durability	30 Mcycles
Maximum operating rate	6000 cyc/h
Immunity to microbreaks	2 ms
Inrush power in W	1.8 W 68 °F (20 °C))
Hold-in power consumption in W	1.8 W 68 °F (20 °C)
Heat dissipation	1.8 W
Minimum switching voltage	17 V
Minimum switching current	5 mA
Non overlap distance	0.02 in (0.5 mm)
Insulation resistance	> 10 MOhm
Height	2.3 in (58 mm)
Width	1.8 in (45 mm)
Depth	2.2 in (57 mm)
Net Weight	0.518 lb(US) (0.235 kg)

Environment

Standards	EN/IEC 60947-5-1 GB/T 14048.5 UL 60947-5-1 CSA C22.2 No 60947-5-1 JIS C8201-5-1
Product Certifications	CB Scheme CCC UL CSA EAC CE UKCA
IP degree of protection	IP2X
Protective treatment	TC IEC 60068
Ambient Air Temperature for Operation	-13...122 °F (-25...50 °C)
Ambient Air Temperature for Storage	-58...176 °F (-50...80 °C)
Operating altitude	6561.68 ft (2000 m) without derating
Flame retardance	V1 conforming to UL 94 Requirement 2 conforming to NF F 16-101 Requirement 2 conforming to NF F 16-102
Mechanical robustness	Vibrations contactor open2 Gn, 5...300 Hz IEC 60068-2-6 Vibrations contactor closed4 Gn, 5...300 Hz IEC 60068-2-6 Shocks contactor open10 Gn for 11 ms IEC 60068-2-27 Shocks contactor closed15 Gn for 11 ms IEC 60068-2-27

Ordering and shipping details

Category	US10I1222371
Discount Schedule	0I12
GTIN	3389110485325
Returnability	No

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Nbr. of units in pkg.	1
Package 1 Height	1.890 in (4.800 cm)
Package 1 Width	2.441 in (6.200 cm)
Package 1 Length	2.677 in (6.800 cm)
Package weight(Lbs)	7.760 oz (220.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	40
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	20.404 lb(US) (9.255 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	73 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	1 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	71 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.4 kg CO2 eq.

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	64
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Dimensions

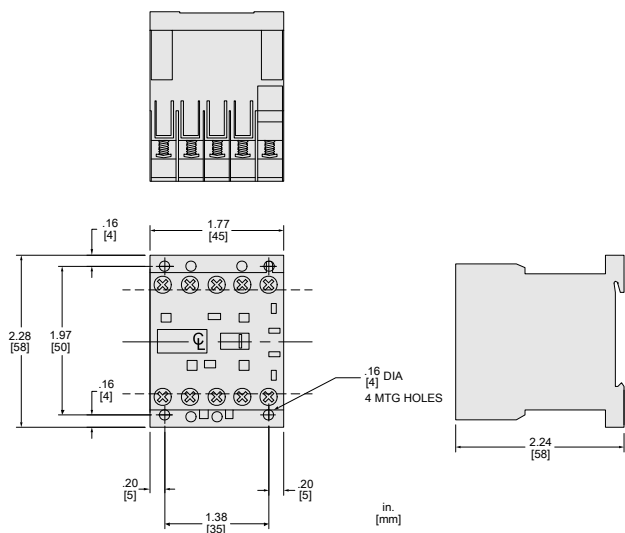

ALL DIMENSIONS ARE APPROXIMATE.
ALSO SEE TECHNICAL DRAWINGS AND DOCUMENTATION.

Offer Marketing Illustration

Product benefits / Features

TeSys K
Technical Benefits



- Control relays for A.C. or D.C. control circuits (AC15, DC13)
- 4 contacts (with different combinations of NO + NC contacts)
- Simultaneous action between contacts
- Various relay Coil voltages: AC; DC
- Instantaneous contacts on the control relays
- Instantaneous and time delay auxiliary contact blocks
- Mounting and marking accessories
- Conforming to IEC 60947, NF C 63-110, VDE 0660, BS 5424

Offer Marketing Illustration

Product benefits / Features

TeSys K
Control Relays



Efficient

Engineered to enhance performance, this solution bridges automation with advanced power architectures to significantly boost motor efficiency.



Versatile

It provides flexible connection options, including screw clamp terminals, spring terminals, and direct welding onto printed circuit boards, making it adaptable to a wide range of installation requirements.



Compact size

This solution is compatible with all standard voltages available on the market and offers a compact design with a width of just 27 millimeters.

