


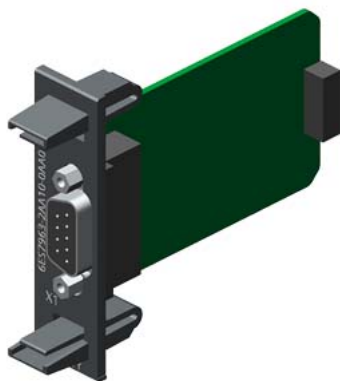

SIMATIC S7-400, interface module IF963-TTY with TTY interface for PTP coupling with CP441 AB CP 441- AA05

Input current	
Current consumption, max.	15 mA from 3.3 V; 23 mA from 24 V
Power loss	
Power loss, typ.	0.6 W
Interfaces	
Point-to-point connection	
• Transmission rate, max.	19.2 kbit/s
• Cable length, max.	1 000 m; at 9 600 bps
Dimensions	
Width	19 mm
Height	67 mm
Depth	87 mm
Weights	
Weight, approx.	80 g
Classifications	

	Version	Classification
eClass	14	27-24-22-08
eClass	12	27-24-22-08
eClass	9.1	27-24-22-08
eClass	9	27-24-22-08
eClass	8	27-24-22-08
eClass	7.1	27-24-22-08
eClass	6	27-24-22-08
ETIM	10	EC001423
ETIM	9	EC001423
ETIM	8	EC001423
ETIM	7	EC001423
IDEA	4	3564
UNSPSC	15	32-15-17-05

Approvals / Certificates	
General Product Approval	



EG-Konf.

[Miscellaneous](#)





UL





RCM

General Product Approval	For use in hazardous locations
--------------------------	--------------------------------

[Miscellaneous](#)

[China RoHS](#)



IECEX



ATEX

[EM](#)



CCC

For use in hazardous locations	Maritime application
--------------------------------	----------------------



IECEX

[Type Examination Certificate](#)



ATEX



DNV



LRS



RINA

Maritime application

[CCS \(China Classification Society\)](#)

last modified:

6/7/2025