


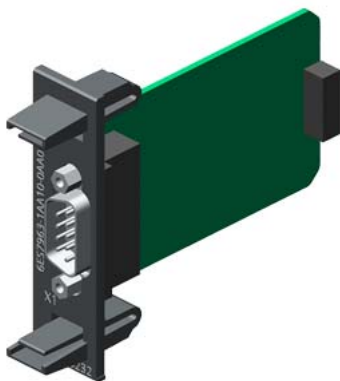

SIMATIC S7-400, interface module IF963-RS232 with RS232 interface for PTP coupling with CP441 AB CP 441- AA05

Input current	
Current consumption, max.	15 mA
Power loss	
Power loss, typ.	0.05 W
Interfaces	
Point-to-point connection	
• Transmission rate, max.	115.2 kbit/s
• Cable length, max.	15 m
Dimensions	
Width	19 mm
Height	67 mm
Depth	87 mm
Weights	
Weight, approx.	80 g
Classifications	

	Version	Classification
eClass	14	27-24-22-08
eClass	12	27-24-22-08
eClass	9.1	27-24-22-08
eClass	9	27-24-22-08
eClass	8	27-24-22-08
eClass	7.1	27-24-22-08
eClass	6	27-24-22-08
ETIM	10	EC001423
ETIM	9	EC001423
ETIM	8	EC001423
ETIM	7	EC001423
IDEA	4	3564
UNSPSC	15	32-15-17-05

Approvals / Certificates	
General Product Approval	



[Miscellaneous](#)



General Product Approval		For use in hazardous locations			
Miscellaneous	China RoHS	 IECEX	 ATEX	EM	 CCC
For use in hazardous locations		Maritime application			
 IECEX	Type Examination Certificate	 ATEX	 BUREAU VERITAS	 DNV	 LRS
Maritime application					
 RINA	CCS (China Classification Society)				

last modified:

6/7/2025 