

Product data sheet

Specifications



DIO drop interface Modicon Quantum - 115/230 V AC - 1 redundant port

140CRA21210

⚠ To be discontinued on: 31 December 2022

⚠ To be end-of-service on: 31 December 2030

⚠ To be discontinued

Main

Range of product	Modicon Quantum automation platform
Product or component type	DIO drop interface

Complementary

Number of port	1 single
[Us] rated supply voltage	115/230 V AC
Supply voltage limits	85...276 V
Supply frequency	47...63 Hz
Maximum supply current	0.2 A 115 V 0.4 A 230 V
Inrush current	10 A 115 V 20 A 230 V
Rated power in VA	50 VA
Associated fuse rating	1.5 A
Output voltage	5.1 V
Nominal output current	3 A
Minimum load current	0 A
Short-circuit protection	With
Output overvoltage protection	With
I/O words	30 I/32 O
Typical backplanes	16 positions 6 positions 3 positions 2 positions 4 positions 10 positions
Diagnostics startup	RAM address Checksum RAM
Diagnostics run time	RAM address RAM Checksum
Power dissipation in W	11 W
Connections - terminals	Terminal block, 7 poles

Module format	Standard
Environment	
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m
Protective treatment	TC
Standards	UL 508
Product certifications	GOST C-Tick UL DNV CSA Class 1 Division 2
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.800 cm
Package 1 Width	16.400 cm
Package 1 Length	31.800 cm
Package 1 Weight	703.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	2
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	1.707 kg
Offer Sustainability	
Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
---------------------------	---

Contractual warranty

Warranty	18 months
----------	-----------


Racks for Modules Mounting

Dimensions of Modules and Racks

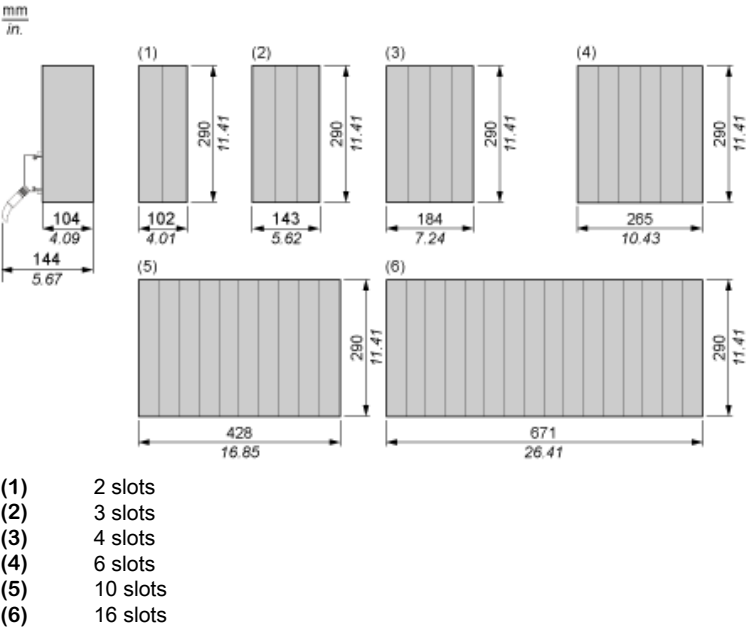

AC Powered Distributed I/O (DIO) Module

Wiring Diagram

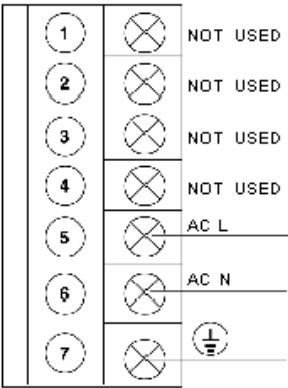

Recommended replacement(s)

140CRA21210 is replaced by:

1x



Remote IO Drop E/IP, Modicon X80, standard
BMXCRA31200