


Product datasheet

Specifications



braking resistor - 27 ohm - 200 W -
cable 2 m - IP65

VW3A7603R20

⚠ Discontinued on: 23 Jan 2021

⚠ Discontinued

Main

Range of product	Lexium Altivar
Range compatibility	Lexium 05 Lexium 28 Lexium 32 Lexium 15 Lexium 52 Lexium 32i Easy Lexium 16
Product compatibility	Motion servo drive LXM16D at 0.75 kW, 200...230 V, single phase Motion servo drive LXM16D at 1 kW, 200...230 V, single phase Motion servo drive LXM16D at 1.5 kW, 200...230 V, single phase
Product or component type	Braking resistor
Ohmic value	27 Ohm

Complementary

Energy peak	4300 J at 480 V 4900 J at 400 V 7400 J at 230 V 9700 J at 115 V
Continuous power	200 W
Protection type	Thermal protection via the servo drive
Net weight	1.08 kg
Cable length	2 m

Environment

IP degree of protection	IP65
Ambient air temperature for storage	-25...85 °C
Ambient air temperature for operation	0...50 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Contractual warranty

Warranty (in months)	18
----------------------	----

Excluding VAT and subject to change. Please check with your local distributor through "Where to buy"

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)


Use Longer

Lifetime extension	
Repair	No

Dimensions Drawings

Braking Resistor

Dimensions

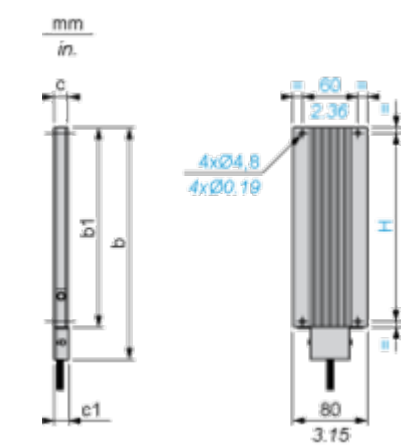

Dimensions in mm

b	b1	c	c1	H
251	216	15	15.5	204

Dimensions in in.

b	b1	c	c1	H
9.88	8.50	0.59	0.61	8.03