

H365N

Safety switch, heavy duty, fusible, 400A, 4 wire, 3 poles, 1 neutral, 250hp, 600VAC/DC, Type 1



Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	Neutral (factory installed)
Phase	3 phase
Number of Poles	3
Current Rating	400 A
Voltage Rating	600 V AC/DC
Enclosure Rating	NEMA 1 steel
Motor power hp	100 Hp at 480 V AC 50-60 Hz for 3 phase motors 250 Hp at 480 V AC 50-60 Hz for 3 phase motors 125 Hp at 600 V AC 50-60 Hz for 3 phase motors 350 Hp at 600 V AC 50-60 Hz for 3 phase motors 50 Hp at 250 V DC 50 hp at 600 V DC

Complementary

Short Circuit Current Rating	10 KA H or K 200 kA R or J
Fuse type	H or K R or J
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	4-wire (3PH + N)
Wire Size	AWG 1/0...750 kcmil copper or aluminium
Tightening torque	550 lbf.in (62.14 N.m) (AWG 1/0...750 kcmil)
Depth	10.13 in (257.30 mm)
Width	27.63 in (701.80 mm)
Height	50.25 in (1276.35 mm)
Net Weight	177.91 lb(US) (80.7 kg)

Environment

Certifications	UL listed file E2875
----------------	----------------------

Ordering and shipping details

Category	00053-H&HU SW,NEMA1,400-1200A
Discount Schedule	DE1
GTIN	785901451778
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	14.02 in (35.6 cm)
Package 1 Width	28.50 in (72.4 cm)
Package 1 Length	51.50 in (130.8 cm)
Package 1 Weight	172.00 lb(US) (78.018 kg)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes
Halogen content performance	Halogen free plastic parts product


Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

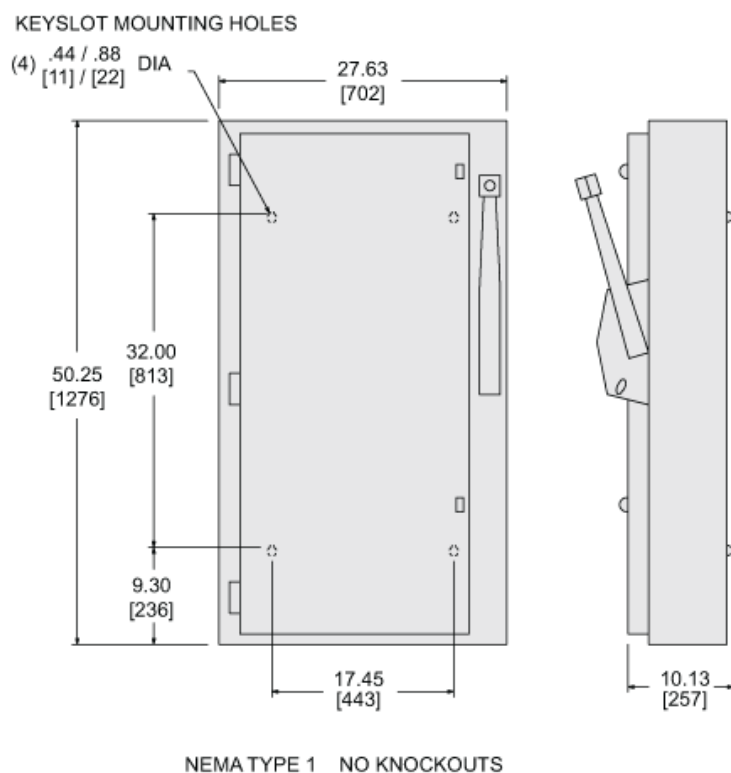

Wiring Diagrams

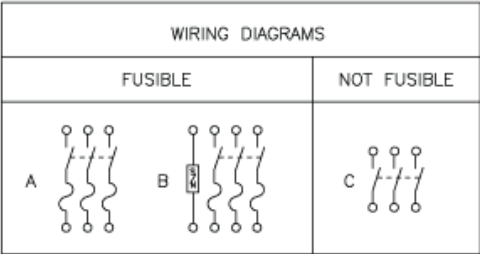

NOTE: FOR SWITCHING DC USE TWO OUTSIDE POLES.

TERMINAL LUGS DATA			
AMPERES	MAX WIRE	MIN WIRE	TYPE
400	(1) 750 KCMIL	(1) #1/0 AWG	AL OR CU
	OR (2) 300 KCMIL	OR (2) #1/0 AWG	

CATALOG NUMBER	MAX VOLTAGE RATINGS	WIRING DIAG	HORSEPOWER RATINGS							
			240VAC	480VAC		600VAC		250 VDC	600 VDC	
			MAX	STD	MAX	STD	MAX			
H365	600VAC;600VDC	A	—	100	250	125	350	50	50	
H365N	600VAC;600VDC	B	—	100	250	125	350	50	50	
HU365	600VAC;600VDC	C	125	—	250	—	350	50	50	