


Product data sheet

Specifications

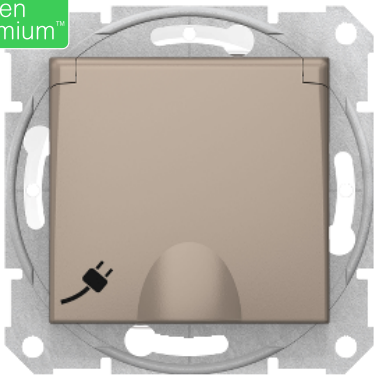

Sedna - single socket outlet, side earth - 16A IP44 shutter, lid, without frame titan

SDN3100368

⚠ To be discontinued on: 30 December 2023

⚠ To be discontinued

Main

Range name	Sedna
Function	Socket-outlet
Delivery form	Without frame
Outlet poles configuration	2P + E with shutters
Outlet standard description	Side earth
Rated current	16 A at 250 V AC
Socket additional information	Lid

Complementary

Power range	3680 W
Kind of terminals	Lift terminals
Terminal capacity	2 cable(s) 2.5 mm ²
Wire structure	Flexible Rigid
Wire stripping length	13 mm
Material of visible parts	PC
Surface finish	Glossy
Fixing mode	Claws, span of claws working range: 52...69 mm Screws
Height	71 mm
Width	71 mm
Depth	49.3 mm
Depth of visual part	18 mm
Product weight	0.077032 kg

Environment

Standards	IEC 60884-1
Product certifications	GOST-R
IP degree of protection	IP44

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.000 cm
Package 1 Width	7.000 cm
Package 1 Length	7.000 cm
Package 1 Weight	81.400 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	9.500 cm
Package 2 Width	18.500 cm
Package 2 Length	27.500 cm
Package 2 Weight	889.000 g
Unit Type of Package 3	S04
Number of Units in Package 3	120
Package 3 Height	30.000 cm
Package 3 Width	40.000 cm
Package 3 Length	60.000 cm
Package 3 Weight	11.342 kg

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

Recommended replacement(s)